

# Quotation

SQDRQ000332-1

**Job Name:** EVERETT RESIDENCE

**Quote Date:** 07/29/2021

**Manufacturer's Estimated Lead Time:** 8-9 Weeks

**Account Manager:** Jim Britt

## Dealer

Ervin Architectural Products  
1255 Carolina Rd  
Suffolk, VA 23434

## Customer

Line	Label	Qty	UOM	Description	Unit	Extended
1	11 - GYM	1	EA	29 13/16 inch X 96 inch (Per Leaf), 1 3/8, TM5100, Swing, Pair, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prehung, Bevel Meeting Stiles, Center Meet Pair Reverse, Prime, Wedge	\$1,237.37	\$1,237.37

T-Astragal = No Astragal

\*\*\*\*\*Door Machining Details\*\*\*\*\*

Machine Prep = TruStile Standard Configuration

Machine Prep = Hinges, Ball Catch

Hinges = TruStile Installed

Hinges = Standard Ball Bearing Hinges

Hinges = Brand: TruStile

Hinges = Qty: 4 per leaf - Size: 3-1/2" x 3-1/2" - Corners: Square

Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",

Hinge 4: 82-1/4"

Hinges = Thickness: 0.125" - Backset: 1/4"

Hinges = Material: Plated Steel

Hinges = Finish: US19-Flat Black

Ball Catch = TruStile Installed

Ball Catch = Standard Ball Catch

Ball Catch = Prep on Top of Door

Ball Catch = Brand: Hager, Model: 1447, Template: I-TA00064,

Template Revision: 02

Ball Catch = US19-Flat Black

Ball Catch = Backset: 2 3/4" From Edge of Door

\*\*\*\*\*Pre-Hanging Details\*\*\*\*\*

Jamb Fire Rating = Non-Rated

Jamb Opening Type = Interior

Jamb Profile = Flat

Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)

Jamb Edge = Radius

Jamb Thickness = 3/4

Jamb Width = 6 9/16

Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)

Jamb Stop Profile = Square

Jamb Stop Width = 1 1/2"

Jamb Stop Thickness = 3/8"

Jamb Leg Extension = 7/8"

\*\*\*\*\*Jamb Machining Details\*\*\*\*\*

Jamb Head Prep = Ball Catch Strike: SeeTemplate

Jamb Leg Prep = Hinge Prep: Standard Hinge

## Comments

TRANSOM ABOVE DOOR NOT INCLUDED.

Line	Label	Qty	UOM	Description	Unit	Extended
------	-------	-----	-----	-------------	------	----------

2	12 - GYM	1	EA	29 13/16 inch X 96 inch (Per Leaf), 1 3/8, TM5100, Swing, Pair, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prehung, Bevel Meeting Stiles, Center Meet Pair Reverse, Prime, Wedge	\$1,237.37	\$1,237.37
---	----------	---	----	---	------------	------------

T-Astragal = No Astragal

\*\*\*\*\*Door Machining Details\*\*\*\*\*

Machine Prep = TruStile Standard Configuration

Machine Prep = Hinges, Ball Catch

Hinges = TruStile Installed

Hinges = Standard Ball Bearing Hinges

Hinges = Brand: TruStile

Hinges = Qty: 4 per leaf - Size: 3-1/2" x 3-1/2" - Corners: Square

Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4", Hinge 4: 82-1/4"

Hinges = Thickness: 0.125" - Backset: 1/4"

Hinges = Material: Plated Steel

Hinges = Finish: US19-Flat Black

Ball Catch = TruStile Installed

Ball Catch = Standard Ball Catch

Ball Catch = Prep on Top of Door

Ball Catch = Brand: Hager, Model: 1447, Template: I-TA00064, Template Revision: 02

Ball Catch = US19-Flat Black

Ball Catch = Backset: 2 3/4" From Edge of Door

\*\*\*\*\*Pre-Hanging Details\*\*\*\*\*

Jamb Fire Rating = Non-Rated

Jamb Opening Type = Interior

Jamb Profile = Flat

Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)

Jamb Edge = Radius

Jamb Thickness = 3/4

Jamb Width = 6 9/16

Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)

Jamb Stop Profile = Square

Jamb Stop Width = 1 1/2"

Jamb Stop Thickness = 3/8"

Jamb Leg Extension = 7/8"

\*\*\*\*\*Jamb Machining Details\*\*\*\*\*

Jamb Head Prep = Ball Catch Strike: SeeTemplate

Jamb Leg Prep = Hinge Prep: Standard Hinge

Comments

TRANSOM ABOVE DOOR NOT INCLUDED.

Line	Label	Qty	UOM	Description	Unit	Extended
3	13 - GARAGE 2	1	EA	35 13/16 inch X 96 inch, 1 3/4, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prehung, Bevel Lock Side, Unknown Handing, Prime, Wedge	\$713.57	\$713.57

\*\*\*\*\*Door Machining Details\*\*\*\*\*

Machine Prep = TruStile Standard Configuration  
Machine Prep = Hinges, Lock Bore, Deadbolt Bore

Hinges = TruStile Installed  
Hinges = Standard Ball Bearing Hinges  
Hinges = Brand: TruStile  
Hinges = Qty: 4 - Size: 4" x 4" - Corners: Square  
Hinges = Locations: Hinge 1: 7", Hinge 2: 32", Hinge 3: 57", Hinge 4: 82"  
Hinges = Thickness: 0.130" - Backset: 1/4"  
Hinges = Material: Plated Steel  
Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware  
Lock Bore = Standard Double Bore  
Lock Bore = Location (ToD): 60" - Location (BoD): 36"  
Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"  
Radius Edge Prep -

Deadbolt Bore = Prep For Hardware  
Deadbolt Bore = Standard Deadbolt Bore  
Deadbolt Bore = Location (ToD): 54 1/2" - Location (BoD): 41 1/2"  
Deadbolt Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4" Radius Edge Prep

\*\*\*\*\*Pre-Hanging Details\*\*\*\*\*

Jamb Fire Rating = Non-Rated  
Jamb Opening Type = Interior  
Jamb Profile = Flat  
Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)  
Jamb Edge = Radius  
Jamb Thickness = 3/4  
Jamb Width = 6 9/16  
Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)  
Jamb Stop Profile = Ogee  
Jamb Stop Width = 1 1/2"  
Jamb Stop Thickness = 3/8"  
Jamb Leg Extension = 7/8"

\*\*\*\*\*Jamb Machining Details\*\*\*\*\*

Jamb Leg Prep = Hinge Prep: Standard Hinge  
Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike  
Jamb Leg Prep = Deadbolt Bore Strike: 2-3/4" x 1-1/8" Radius Corner

Line	Label	Qty	UOM	Description	Unit	Extended
4	14 - 2680 RH	4	EA	29 13/16 inch X 96 inch, 1 3/8, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prehung, Bevel Lock Side, RH, Prime, Wedge	\$590.14	\$2,360.57

\*\*\*\*\*Door Machining Details\*\*\*\*\*

Machine Prep = TruStile Standard Configuration

Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed

Hinges = Standard Ball Bearing Hinges

Hinges = Brand: TruStile

Hinges = Qty: 4 - Size: 3-1/2" x 3-1/2" - Corners: Square

Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",  
Hinge 4: 82-1/4"

Hinges = Thickness: 0.125" - Backset: 1/4"

Hinges = Material: Plated Steel

Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware

Lock Bore = Standard Single Bore

Lock Bore = Location (ToD): 60" - Location (BoD): 36"

Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"

Radius Edge Prep -

\*\*\*\*\*Pre-Hanging Details\*\*\*\*\*

Jamb Fire Rating = Non-Rated

Jamb Opening Type = Interior

Jamb Profile = Flat

Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)

Jamb Edge = Radius

Jamb Thickness = 3/4

Jamb Width = 4 9/16

Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)

Jamb Stop Profile = Ogee

Jamb Stop Width = 1 1/2"

Jamb Stop Thickness = 3/8"

Jamb Leg Extension = 7/8"

\*\*\*\*\*Jamb Machining Details\*\*\*\*\*

Jamb Leg Prep = Hinge Prep: Standard Hinge

Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
5	14 - PANTRY	1	EA	29 13/16 inch X 96 inch, 1 3/8, TM1000, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, Prehung, Bevel Lock Side, RH, Prime, Wedge	\$1,284.43	\$1,284.43

Panel Substitution = Replace All Panels with Glass  
Glass = 1/4" White Lami

\*\*\*\*\*Door Machining Details\*\*\*\*\*

Machine Prep = TruStile Standard Configuration  
Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed  
Hinges = Standard Ball Bearing Hinges  
Hinges = Brand: TruStile  
Hinges = Qty: 4 - Size: 3-1/2" x 3-1/2" - Corners: Square  
Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",  
Hinge 4: 82-1/4"  
Hinges = Thickness: 0.125" - Backset: 1/4"  
Hinges = Material: Plated Steel  
Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware  
Lock Bore = Standard Single Bore  
Lock Bore = Location (ToD): 60" - Location (BoD): 36"  
Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"  
Radius Edge Prep -

\*\*\*\*\*Pre-Hanging Details\*\*\*\*\*

Jamb Fire Rating = Non-Rated  
Jamb Opening Type = Interior  
Jamb Profile = Flat  
Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)  
Jamb Edge = Radius  
Jamb Thickness = 3/4  
Jamb Width = 4 9/16  
Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)  
Jamb Stop Profile = Ogee  
Jamb Stop Width = 1 1/2"  
Jamb Stop Thickness = 3/8"  
Jamb Leg Extension = 7/8"

\*\*\*\*\*Jamb Machining Details\*\*\*\*\*

Jamb Leg Prep = Hinge Prep: Standard Hinge  
Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
6	15 - 2680 POCKET	6	EA	30 inch X 96 inch, 1 3/8, TM5100, Pocket, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prime, Wedge	\$487.54	\$2,925.26

LVL Stiles = Yes

Line	Label	Qty	UOM	Description	Unit	Extended
7	16 - 4080 PRIV LAMI	2	EA	23 13/16 inch X 96 inch (Per Leaf), 1 3/8, TM5100, Swing, Pair, TruStile Interior MDF Door, SS-Square Stick Sticking, Prehung, Bevel Lock Side of Active Door, RH Active in Pair, Prime, Wedge	\$2,773.29	\$5,546.57

Panel Substitution = Replace All Panels with Glass  
Glass = 1/4" White Lami  
T-Astragal = Astragal Supplied

\*\*\*\*\*Door Machining Details\*\*\*\*\*

Machine Prep = TruStile Standard Configuration  
Machine Prep = Hinges, Lock Bore, Flushbolt

Hinges = TruStile Installed  
Hinges = Standard Ball Bearing Hinges  
Hinges = Brand: TruStile  
Hinges = Qty: 4 per leaf - Size: 3-1/2" x 3-1/2" - Corners: Square  
Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",  
Hinge 4: 82-1/4"  
Hinges = Thickness: 0.125" - Backset: 1/4"  
Hinges = Material: Plated Steel  
Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware  
Lock Bore = Standard Single Bore  
Lock Bore = Location (ToD): 60" - Location (BoD): 36"  
Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"  
Radius Edge Prep -

Top Flushbolt = TruStile Installed  
Top Flushbolt = Standard Flushbolt  
Top Flushbolt = Extension: 18"  
Top Flushbolt = Brand: Hager, Model: 282, Template: T-TA00177  
Top Flushbolt = Flushbolt Finish: US19-Flat Black

Bottom Flushbolt = TruStile Installed  
Bottom Flushbolt = Standard Flushbolt  
Bottom Flushbolt = Extension: None  
Bottom Flushbolt = Brand: Hager, Model: 281, Template: T281D  
Bottom Flushbolt = Flushbolt Finish: US19-Flat Black

Astragal/Door Edge Strike (Inactive Leaf) = Lock Bore Strike  
Astragal/Door Edge Strike (Inactive Leaf) = 2-1/4" Radius Lip Strike

\*\*\*\*\*Pre-Hanging Details\*\*\*\*\*

Jamb Fire Rating = Non-Rated  
Jamb Opening Type = Interior  
Jamb Profile = Flat  
Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)  
Jamb Edge = Radius  
Jamb Thickness = 3/4  
Jamb Width = 4 9/16  
Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)  
Jamb Stop Profile = Ogee  
Jamb Stop Width = 1 1/2"  
Jamb Stop Thickness = 3/8"  
Jamb Leg Extension = 7/8"

\*\*\*\*\*Jamb Machining Details\*\*\*\*\*

Jamb Head Prep = Flushbolt Head Strike: SeeTemplate  
Jamb Leg Prep = Hinge Prep: Standard Hinge

Line	Label	Qty	UOM	Description	Unit	Extended
8	17 - 2680 DBL POCKET	1	EA	30 inch X 96 inch, 1 3/8, TM5100, Pocket, Pair, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prime, Wedge	\$975.09	\$975.09

LVL Stiles = Yes

Line	Label	Qty	UOM	Description	Unit	Extended
9	18 - 2880 POCKET	1	EA	32 inch X 96 inch, 1 3/8, TM5100, Pocket, Single, TruStile Interior MDF Door, SS- Square Stick Sticking, C-Flat Panel, Prime, Wedge	\$491.40	\$491.40

LVL Stiles = Yes

Line	Label	Qty	UOM	Description	Unit	Extended
10	19 - 2080 RH	1	EA	23 13/16 inch X 96 inch, 1 3/8, TM5100, Swing, Single, TruStile Interior MDF Door, SS- Square Stick Sticking, C-Flat Panel, Prehung, Bevel Lock Side, RH, Prime, Wedge	\$570.09	\$570.09

\*\*\*\*\*Door Machining Details\*\*\*\*\*

Machine Prep = TruStile Standard Configuration

Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed

Hinges = Standard Ball Bearing Hinges

Hinges = Brand: TruStile

Hinges = Qty: 4 - Size: 3-1/2" x 3-1/2" - Corners: Square

Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",  
Hinge 4: 82-1/4"

Hinges = Thickness: 0.125" - Backset: 1/4"

Hinges = Material: Plated Steel

Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware

Lock Bore = Standard Single Bore

Lock Bore = Location (ToD): 60" - Location (BoD): 36"

Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"

Radius Edge Prep -

\*\*\*\*\*Pre-Hanging Details\*\*\*\*\*

Jamb Fire Rating = Non-Rated

Jamb Opening Type = Interior

Jamb Profile = Flat

Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)

Jamb Edge = Radius

Jamb Thickness = 3/4

Jamb Width = 4 9/16

Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)

Jamb Stop Profile = Square

Jamb Stop Width = 1 1/2"

Jamb Stop Thickness = 3/8"

Jamb Leg Extension = 7/8"

\*\*\*\*\*Jamb Machining Details\*\*\*\*\*

Jamb Leg Prep = Hinge Prep: Standard Hinge

Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
11	20- 2880 RH LAMI	2	EA	31 13/16 inch X 96 inch, 1 3/8, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, Prehung, Bevel Lock Side, RH, Prime, Wedge	\$1,404.00	\$2,808.00

Panel Substitution = Replace All Panels with Glass  
Glass = 1/4" White Lami

\*\*\*\*\*Door Machining Details\*\*\*\*\*

Machine Prep = TruStile Standard Configuration  
Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed  
Hinges = Standard Ball Bearing Hinges  
Hinges = Brand: TruStile  
Hinges = Qty: 4 - Size: 3-1/2" x 3-1/2" - Corners: Square  
Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",  
Hinge 4: 82-1/4"  
Hinges = Thickness: 0.125" - Backset: 1/4"  
Hinges = Material: Plated Steel  
Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware  
Lock Bore = Standard Single Bore  
Lock Bore = Location (ToD): 60" - Location (BoD): 36"  
Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"  
Radius Edge Prep -

\*\*\*\*\*Pre-Hanging Details\*\*\*\*\*

Jamb Fire Rating = Non-Rated  
Jamb Opening Type = Interior  
Jamb Profile = Flat  
Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)  
Jamb Edge = Radius  
Jamb Thickness = 3/4  
Jamb Width = 4 9/16  
Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)  
Jamb Stop Profile = Square  
Jamb Stop Width = 1 1/2"  
Jamb Stop Thickness = 3/8"  
Jamb Leg Extension = 7/8"

\*\*\*\*\*Jamb Machining Details\*\*\*\*\*

Jamb Leg Prep = Hinge Prep: Standard Hinge  
Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
12	21 - 2480 LH	2	EA	27 13/16 inch X 96 inch, 1 3/8, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prehung, Bevel Lock Side, LH, Prime, Wedge	\$590.14	\$1,180.29



\*\*\*\*\*Door Machining Details\*\*\*\*\*

Machine Prep = TruStile Standard Configuration  
Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed  
Hinges = Standard Ball Bearing Hinges  
Hinges = Brand: TruStile  
Hinges = Qty: 4 - Size: 3-1/2" x 3-1/2" - Corners: Square  
Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",  
Hinge 4: 82-1/4"  
Hinges = Thickness: 0.125" - Backset: 1/4"  
Hinges = Material: Plated Steel  
Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware  
Lock Bore = Standard Single Bore  
Lock Bore = Location (ToD): 60" - Location (BoD): 36"  
Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"  
Radius Edge Prep -

\*\*\*\*\*Pre-Hanging Details\*\*\*\*\*

Jamb Fire Rating = Non-Rated  
Jamb Opening Type = Interior  
Jamb Profile = Flat  
Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)  
Jamb Edge = Radius  
Jamb Thickness = 3/4  
Jamb Width = 4 9/16  
Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)  
Jamb Stop Profile = Ogee  
Jamb Stop Width = 1 1/2"  
Jamb Stop Thickness = 3/8"  
Jamb Leg Extension = 7/8"

\*\*\*\*\*Jamb Machining Details\*\*\*\*\*

Jamb Leg Prep = Hinge Prep: Standard Hinge  
Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
13	22A - 2680 BYPASS	1	EA	30 inch X 96 inch, 1 3/8, TM5100, Sliding, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Unknown Handing, Prime, Wedge	\$487.54	\$487.54

LVL Stiles = Yes

Line	Label	Qty	UOM	Description	Unit	Extended
14	22B - 2680 BYPASS	1	EA	MODIFIED, 31 inch X 96 inch, 1 3/8, TM5100, Sliding, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Unknown Handing, Prime, Wedge	\$510.69	\$510.69

LVL Stiles = Yes

Comments
----------

THIS SLAB TO BE 1" WIDER FOR OVERLAP

Line	Label	Qty	UOM	Description	Unit	Extended
15	23 - 2680 LH	5	EA	29 13/16 inch X 96 inch, 1 3/8, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prehung, Bevel Lock Side, LH, Prime, Wedge	\$590.14	\$2,950.71

\*\*\*\*\*Door Machining Details\*\*\*\*\*

Machine Prep = TruStile Standard Configuration  
Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed  
Hinges = Standard Ball Bearing Hinges  
Hinges = Brand: TruStile  
Hinges = Qty: 4 - Size: 3-1/2" x 3-1/2" - Corners: Square  
Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",  
Hinge 4: 82-1/4"  
Hinges = Thickness: 0.125" - Backset: 1/4"  
Hinges = Material: Plated Steel  
Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware  
Lock Bore = Standard Single Bore  
Lock Bore = Location (ToD): 60" - Location (BoD): 36"  
Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"  
Radius Edge Prep -

\*\*\*\*\*Pre-Hanging Details\*\*\*\*\*

Jamb Fire Rating = Non-Rated  
Jamb Opening Type = Interior  
Jamb Profile = Flat  
Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)  
Jamb Edge = Radius  
Jamb Thickness = 3/4  
Jamb Width = 4 9/16  
Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)  
Jamb Stop Profile = Ogee  
Jamb Stop Width = 1 1/2"  
Jamb Stop Thickness = 3/8"  
Jamb Leg Extension = 7/8"

\*\*\*\*\*Jamb Machining Details\*\*\*\*\*

Jamb Leg Prep = Hinge Prep: Standard Hinge  
Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
16	24A - 2080 BYPASS	2	EA	24 inch X 96 inch, 1 3/8, TM5100, Sliding, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Unknown Handing, Prime, Wedge	\$467.49	\$934.97

LVL Stiles = Yes

Line	Label	Qty	UOM	Description	Unit	Extended
17	24B - 2080 BYPASS	2	EA	MODIFIED, 25 inch X 96 inch, 1 3/8, TM5100, Sliding, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Unknown Handing, Prime, Wedge	\$506.83	\$1,013.66

LVL Stiles = Yes

Comments
----------

THIS SLAB TO BE 1" WIDER FOR OVERLAP

Line	Label	Qty	UOM	Description	Unit	Extended
18	25 - 2880 LH	3	EA	31 13/16 inch X 96 inch, 1 3/8, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prehung, Bevel Lock Side, LH, Prime, Wedge	\$594.00	\$1,782.00

\*\*\*\*\*Door Machining Details\*\*\*\*\*

Machine Prep = TruStile Standard Configuration  
Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed  
Hinges = Standard Ball Bearing Hinges  
Hinges = Brand: TruStile  
Hinges = Qty: 4 - Size: 3-1/2" x 3-1/2" - Corners: Square  
Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",  
Hinge 4: 82-1/4"  
Hinges = Thickness: 0.125" - Backset: 1/4"  
Hinges = Material: Plated Steel  
Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware  
Lock Bore = Standard Single Bore  
Lock Bore = Location (ToD): 60" - Location (BoD): 36"  
Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"  
Radius Edge Prep -

\*\*\*\*\*Pre-Hanging Details\*\*\*\*\*

Jamb Fire Rating = Non-Rated  
Jamb Opening Type = Interior  
Jamb Profile = Flat  
Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)  
Jamb Edge = Radius  
Jamb Thickness = 3/4  
Jamb Width = 4 9/16  
Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)  
Jamb Stop Profile = Ogee  
Jamb Stop Width = 1 1/2"  
Jamb Stop Thickness = 3/8"  
Jamb Leg Extension = 7/8"

\*\*\*\*\*Jamb Machining Details\*\*\*\*\*

Jamb Leg Prep = Hinge Prep: Standard Hinge  
Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
19	28- 2680 LH LAMI	1	EA	29 13/16 inch X 96 inch, 1 3/8, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, Prehung, Bevel Lock Side, LH, Prime, Wedge	\$1,400.14	\$1,400.14

Panel Substitution = Replace All Panels with Glass  
Glass = 1/4" White Lami

\*\*\*\*\*Door Machining Details\*\*\*\*\*

Machine Prep = TruStile Standard Configuration  
Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed  
Hinges = Standard Ball Bearing Hinges  
Hinges = Brand: TruStile  
Hinges = Qty: 4 - Size: 3-1/2" x 3-1/2" - Corners: Square  
Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",  
Hinge 4: 82-1/4"  
Hinges = Thickness: 0.125" - Backset: 1/4"  
Hinges = Material: Plated Steel  
Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware  
Lock Bore = Standard Single Bore  
Lock Bore = Location (ToD): 60" - Location (BoD): 36"  
Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"  
Radius Edge Prep -

\*\*\*\*\*Pre-Hanging Details\*\*\*\*\*

Jamb Fire Rating = Non-Rated  
Jamb Opening Type = Interior  
Jamb Profile = Flat  
Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)  
Jamb Edge = Radius  
Jamb Thickness = 3/4  
Jamb Width = 4 9/16  
Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)  
Jamb Stop Profile = Square  
Jamb Stop Width = 1 1/2"  
Jamb Stop Thickness = 3/8"  
Jamb Leg Extension = 7/8"

\*\*\*\*\*Jamb Machining Details\*\*\*\*\*

Jamb Leg Prep = Hinge Prep: Standard Hinge  
Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
20	29 - GARAGE 1	1	EA	35 13/16 inch X 96 inch, 1 3/4, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prehung, Bevel Lock Side, LHR, 20 Minute Neutral Pressure Fire Rating, Prime, Wedge	\$1,109.31	\$1,109.31

Fire Label = Machined and Labeled

\*\*\*\*\*Door Machining Details\*\*\*\*\*

Machine Prep = TruStile Standard Configuration  
Machine Prep = Hinges, Lock Bore, Deadbolt Bore

Hinges = TruStile Installed  
Hinges = Standard Spring Hinges  
Hinges = Brand: TruStile  
Hinges = Qty: 4 - Size: 4" x 4" - Corners: Square  
Hinges = Locations: Hinge 1: 7", Hinge 2: 32", Hinge 3: 57", Hinge 4: 82"  
Hinges = Thickness: 0.130" - Backset: 1/4"  
Hinges = Material: Plated Steel  
Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware  
Lock Bore = Standard Double Bore  
Lock Bore = Location (ToD): 60" - Location (BoD): 36"  
Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"  
Radius Edge Prep -

Deadbolt Bore = Prep For Hardware  
Deadbolt Bore = Standard Deadbolt Bore  
Deadbolt Bore = Location (ToD): 54 1/2" - Location (BoD): 41 1/2"  
Deadbolt Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"  
1/4" Radius Edge Prep

\*\*\*\*\*Pre-Hanging Details\*\*\*\*\*

Jamb Fire Rating = 20 Minute  
Jamb Opening Type = House to Garage  
Jamb Profile = Single Rabbet  
Jamb Material = Poplar (Paint-Grade) (Primed)  
Jamb Edge = Radius  
Jamb Thickness = 3/4  
Jamb Width = 4 9/16  
Kerf for Weatherstripping = Yes  
Weatherstripping = Bronze  
Sill & Sweep = Composite Bumper Sill (Bronze Finish)  
Jamb Leg Extension = 1/2"

\*\*\*\*\*Jamb Machining Details\*\*\*\*\*

Jamb Leg Prep = Hinge Prep: Standard Hinge  
Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike  
Jamb Leg Prep = Deadbolt Bore Strike: 2-3/4" x 1-1/8" Radius Corner

Line	Label	Qty	UOM	Description	Unit	Extended
21	30 - 2480 LH 6	1	EA	27 13/16 inch X 96 inch, 1 3/8, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prehung, Bevel Lock Side, LH, Prime, Wedge	\$628.71	\$628.71

\*\*\*\*\*Door Machining Details\*\*\*\*\*

Machine Prep = TruStile Standard Configuration

Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed

Hinges = Standard Ball Bearing Hinges

Hinges = Brand: TruStile

Hinges = Qty: 4 - Size: 3-1/2" x 3-1/2" - Corners: Square

Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",  
Hinge 4: 82-1/4"

Hinges = Thickness: 0.125" - Backset: 1/4"

Hinges = Material: Plated Steel

Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware

Lock Bore = Standard Single Bore

Lock Bore = Location (ToD): 60" - Location (BoD): 36"

Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"

Radius Edge Prep -

\*\*\*\*\*Pre-Hanging Details\*\*\*\*\*

Jamb Fire Rating = Non-Rated

Jamb Opening Type = Interior

Jamb Profile = Flat

Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)

Jamb Edge = Radius

Jamb Thickness = 3/4

Jamb Width = 6 9/16

Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)

Jamb Stop Profile = Ogee

Jamb Stop Width = 1 1/2"

Jamb Stop Thickness = 3/8"

Jamb Leg Extension = 7/8"

\*\*\*\*\*Jamb Machining Details\*\*\*\*\*


Jamb Leg Prep = Hinge Prep: Standard Hinge

Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
22		1	EA	Manufacturer's Freight for 45 Doors	\$421.43	\$421.43
						<b>Tax (6.00%):</b>
						<b>\$1,954.15</b>
<b>Total Units: 40</b>						<b>Total: \$34,523.32</b>




Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 1 - 11 - GYM		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 07/29/2021		




Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 2 - 12 - GYM		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 07/29/2021		




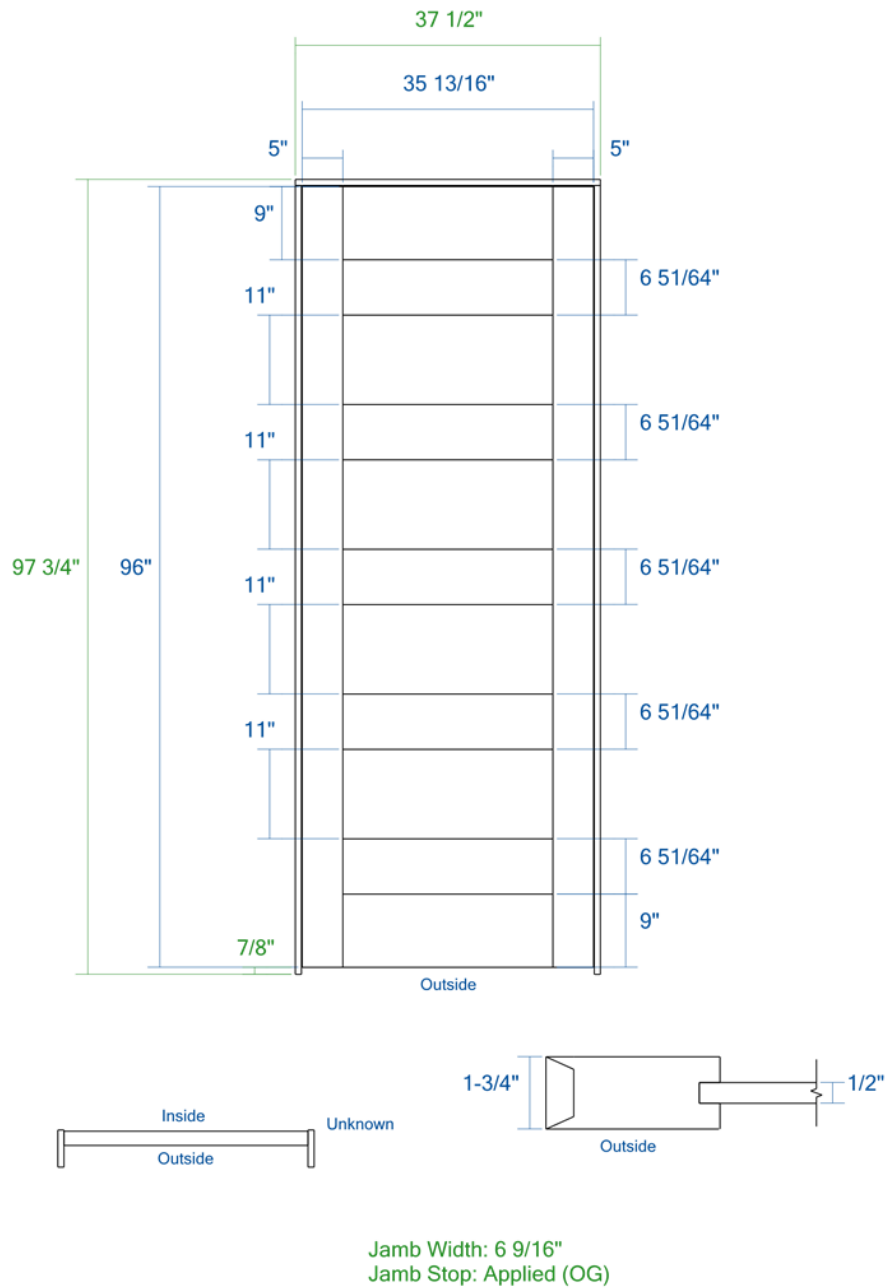


Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 3 - 13 - GARAGE 2		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 07/29/2021		




Created On: 07/29/2021

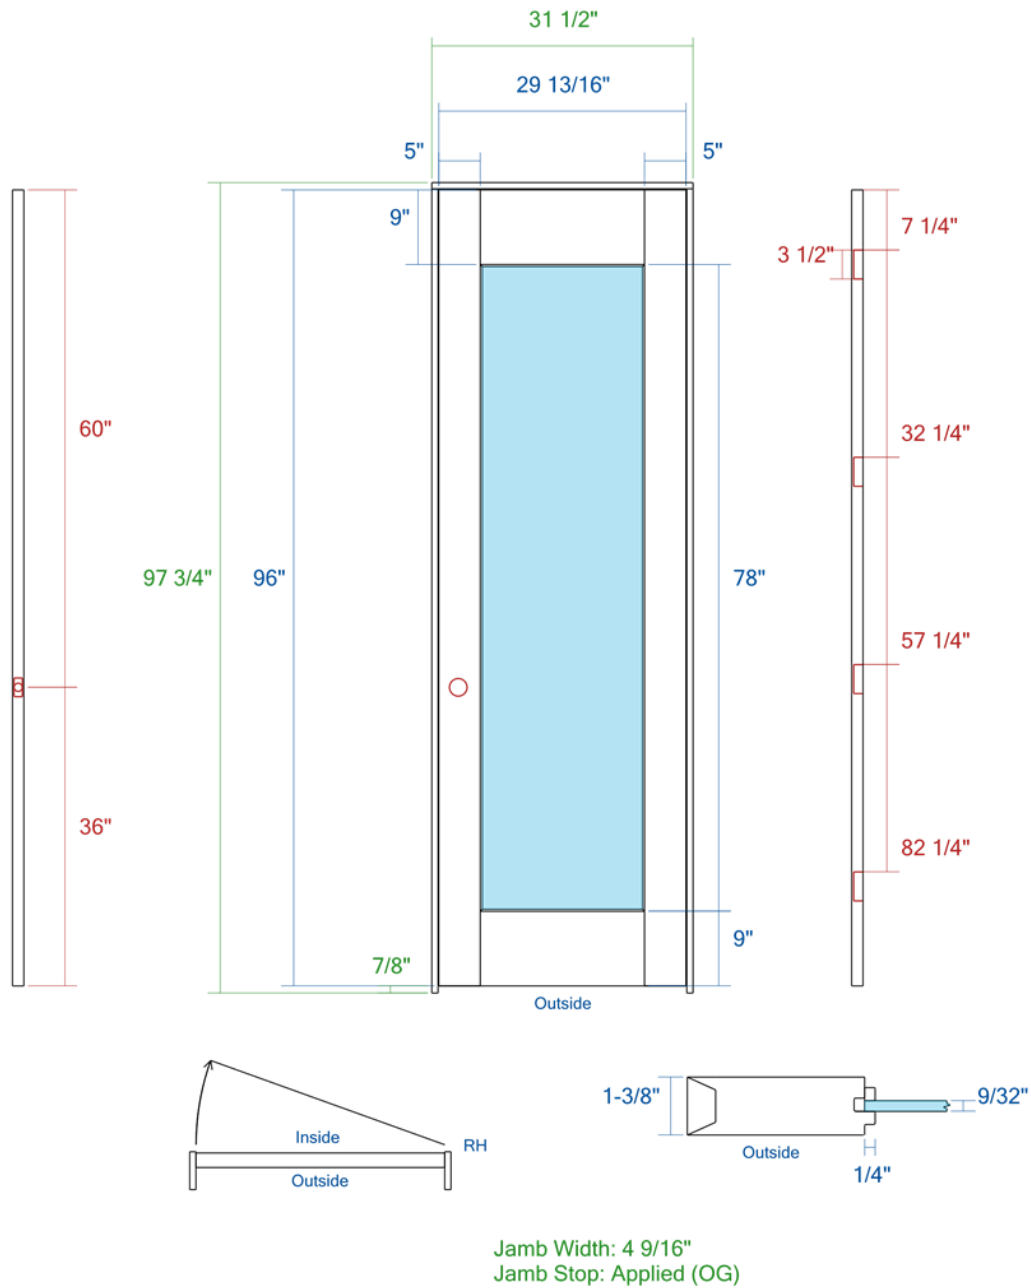

Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM1000	SS	NA	MDF	1/4" White Lami	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 5 - 14 - PANTRY		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 07/29/2021		

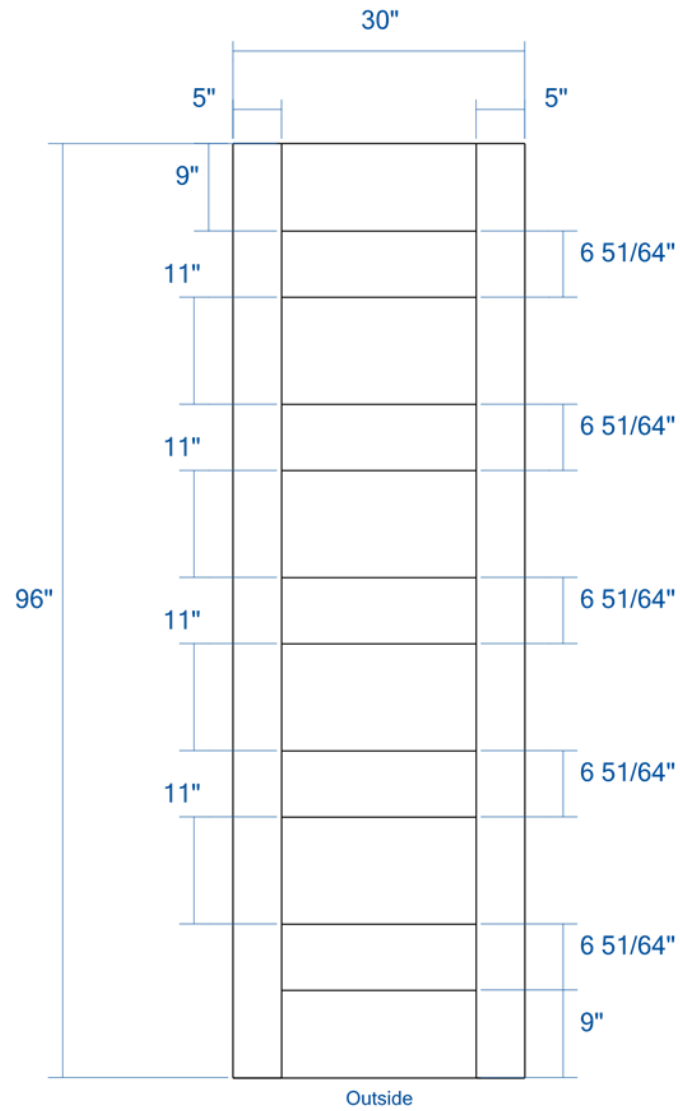


Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 6 - 15 - 2680 POCKET		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 07/29/2021		

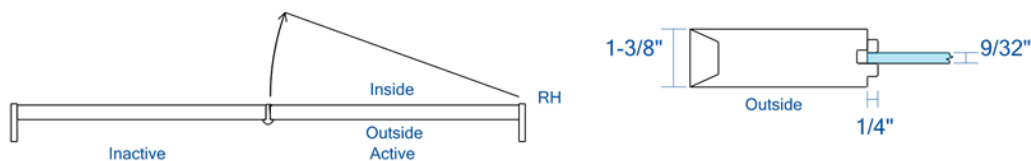


### Jamb Stop: Applied (OG)



Created On: 07/29/2021

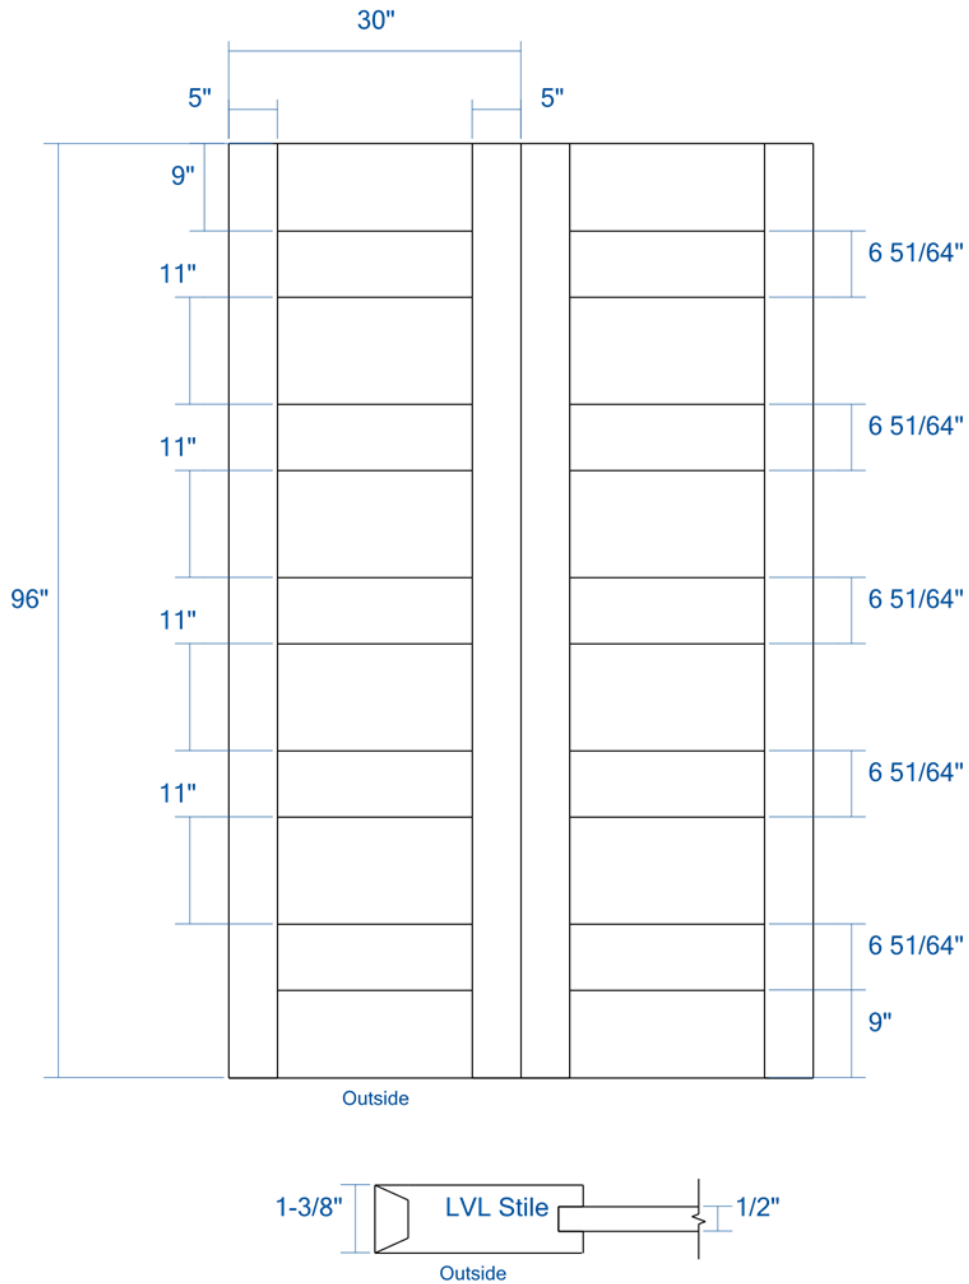

Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 8 - 17 - 2680 DBL POCKET		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 07/29/2021		

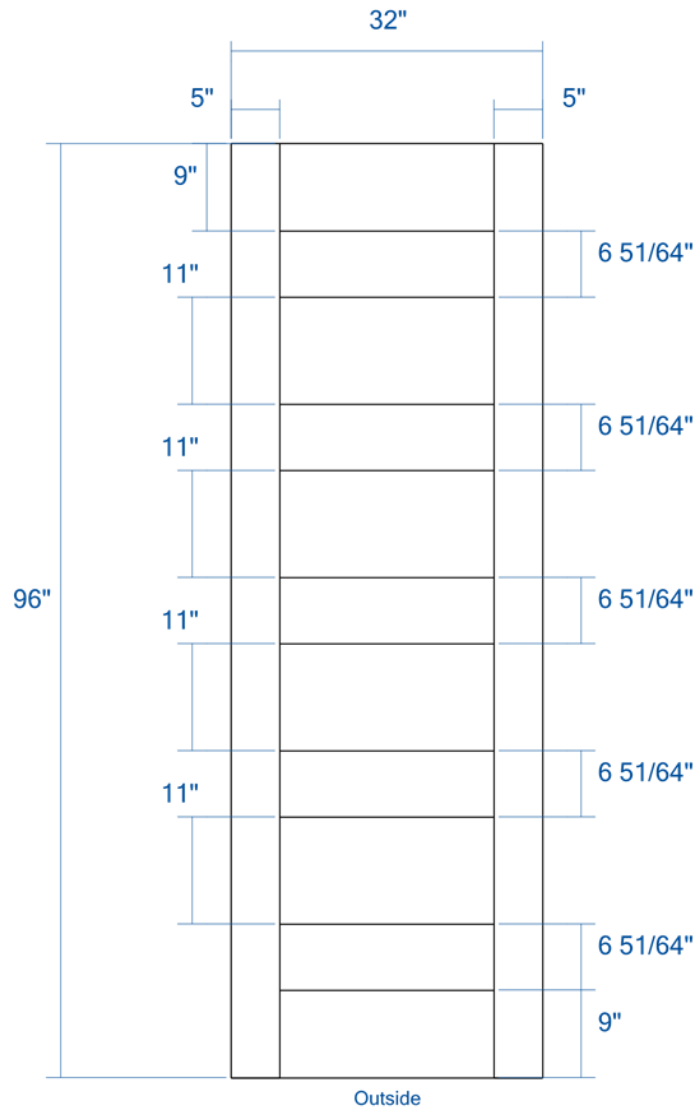

Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 9 - 18 - 2880 POCKET		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 07/29/2021		

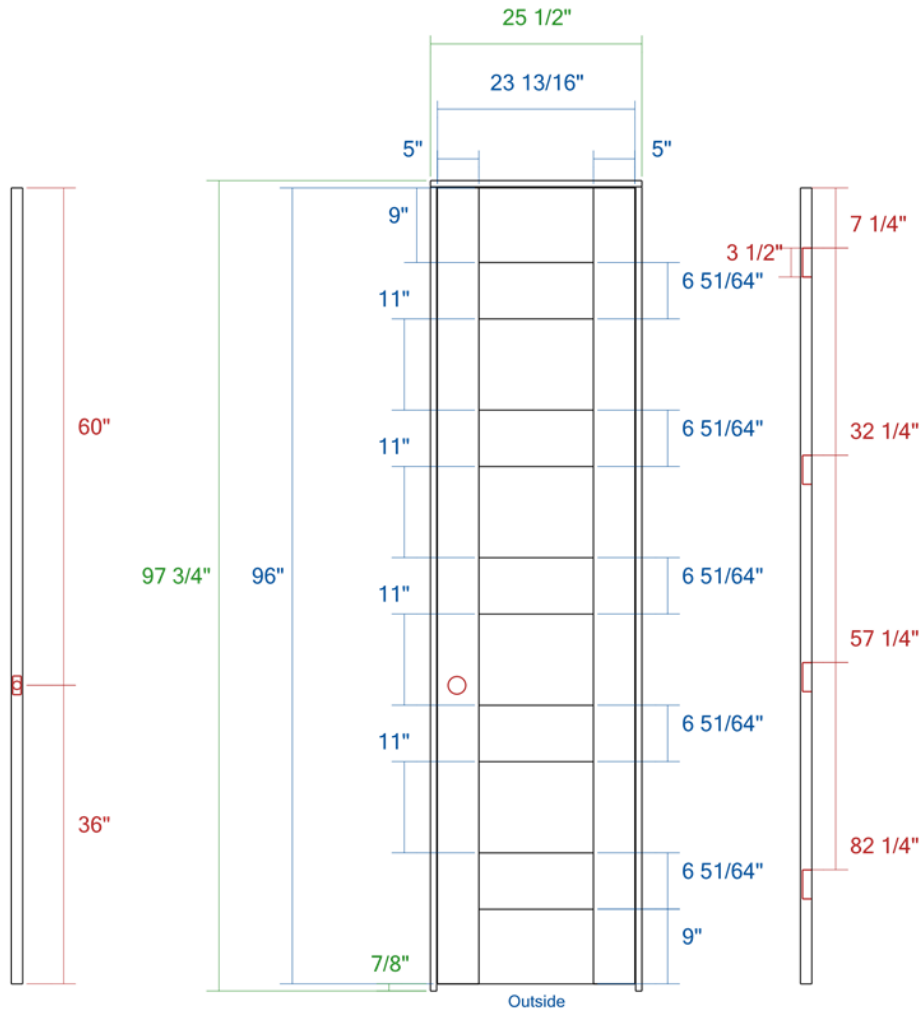


Jamb Width: 4 9/16"  
Jamb Stop: Applied (Square)


Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 10 - 19 - 2080 RH		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 07/29/2021		




Page 25 of 35




Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 12 - 21 - 2480 LH		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 07/29/2021		

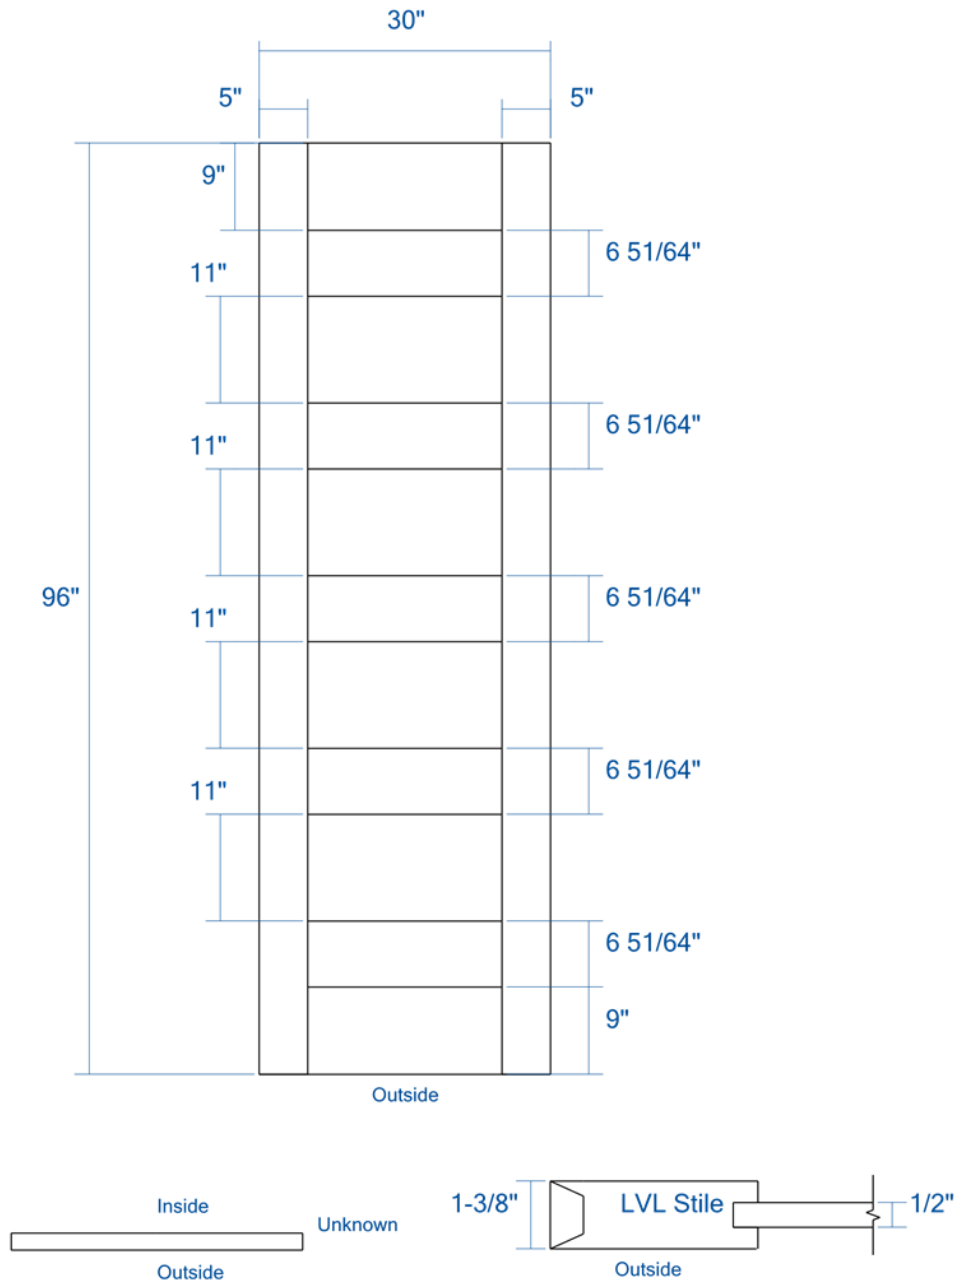

Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 13 - 22A - 2680 BYPASS		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 07/29/2021		

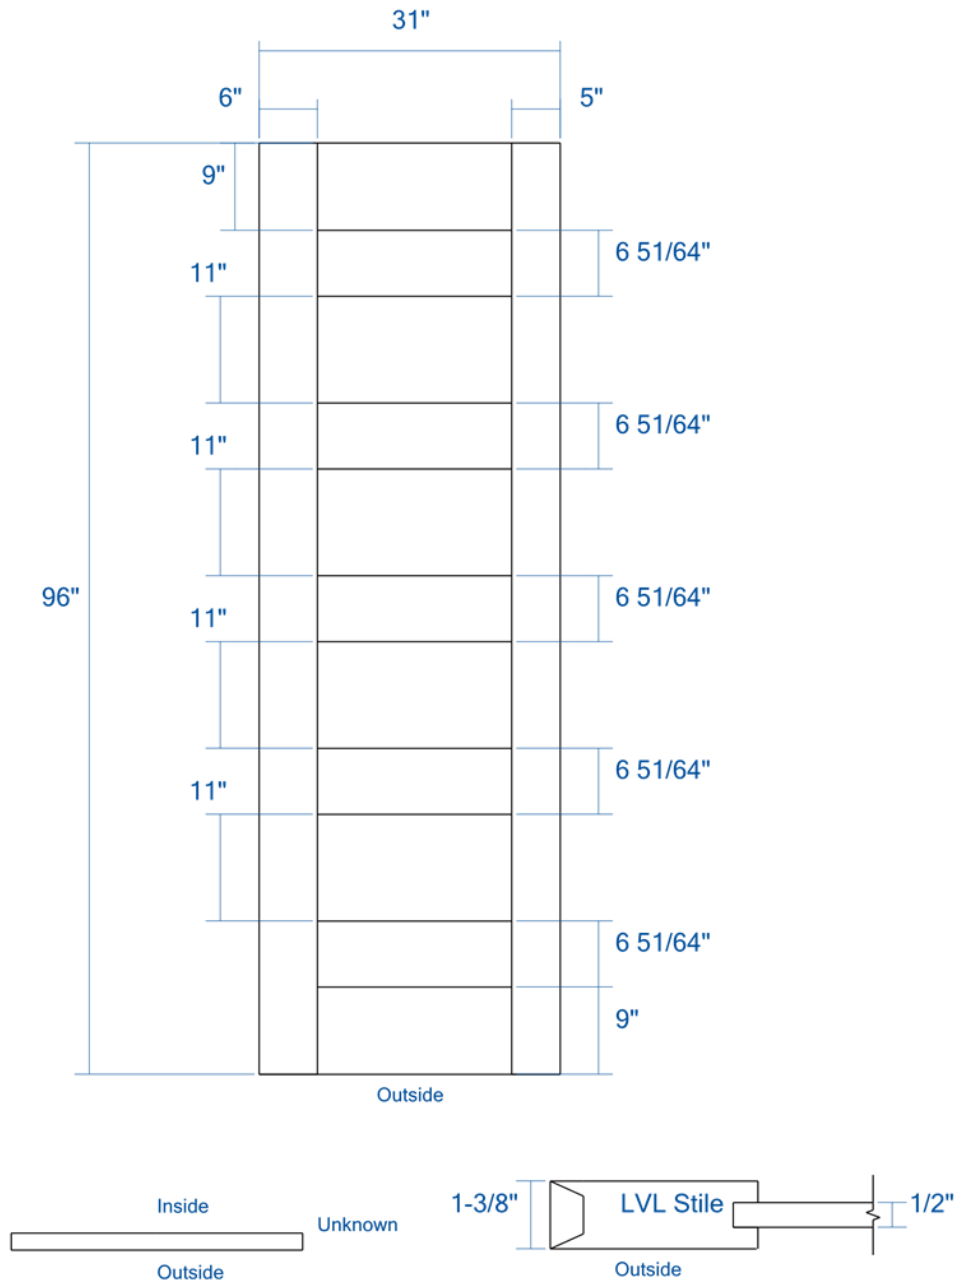


Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
MODIFIED TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 14 - 22B - 2680 BYPASS		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 07/29/2021		




### Jamb Stop: Applied (OG)


Quote #: SQDRQ000332-1

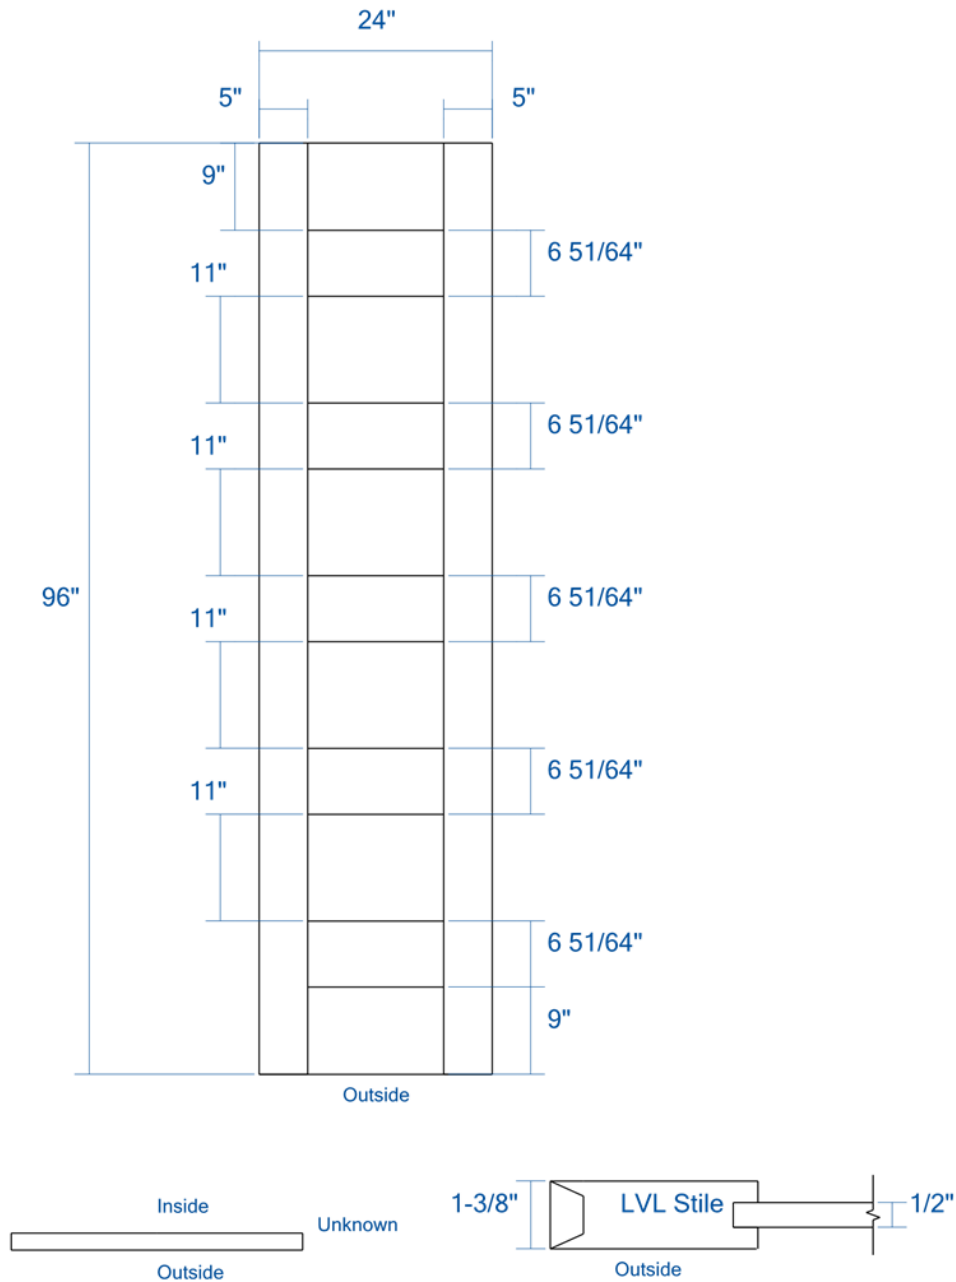

Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 16 - 24A - 2080 BYPASS		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 07/29/2021		



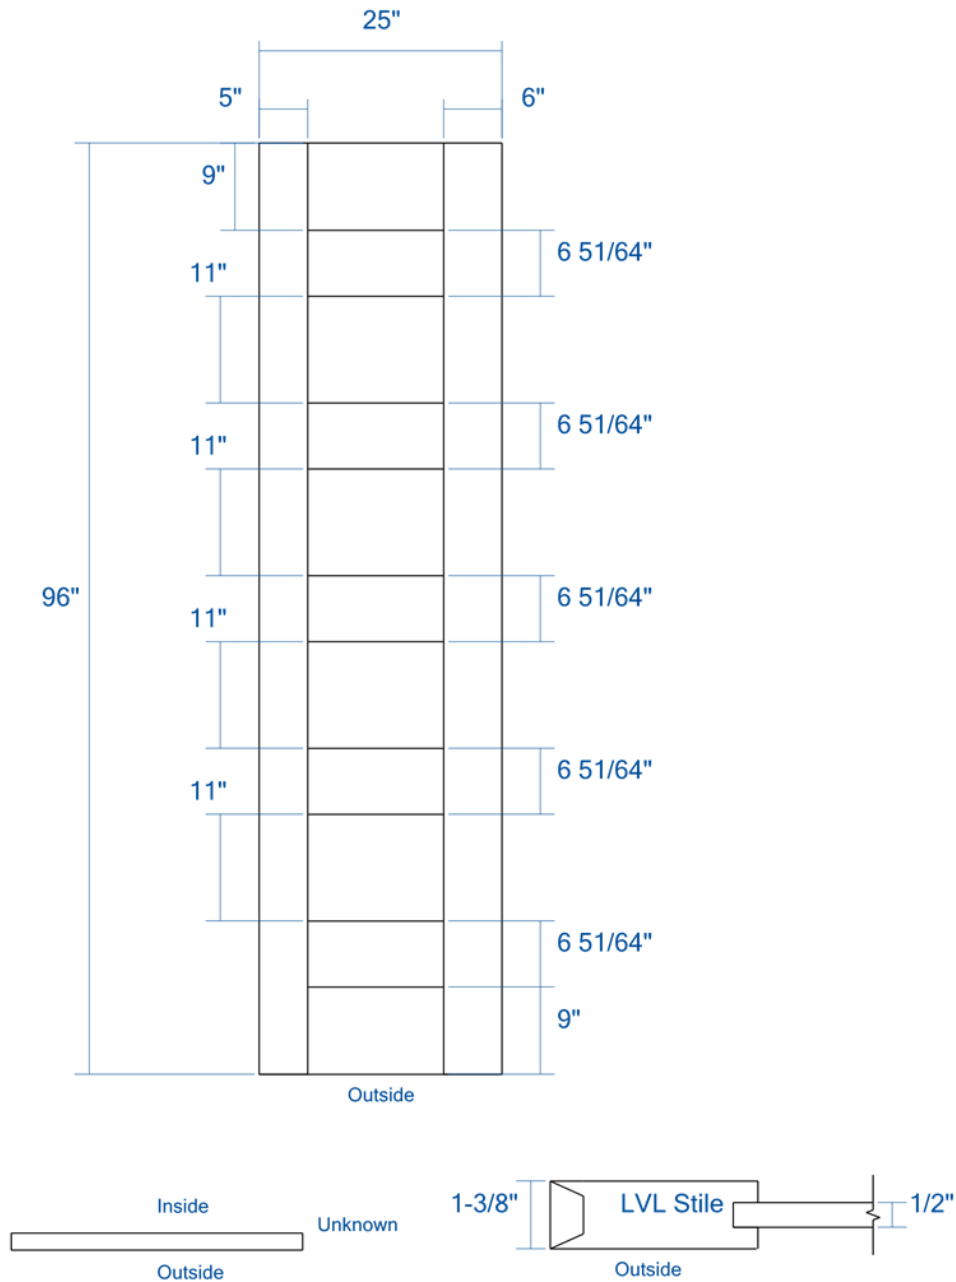


Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
MODIFIED TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 17 - 24B - 2080 BYPASS		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 07/29/2021		



Created On: 07/29/2021




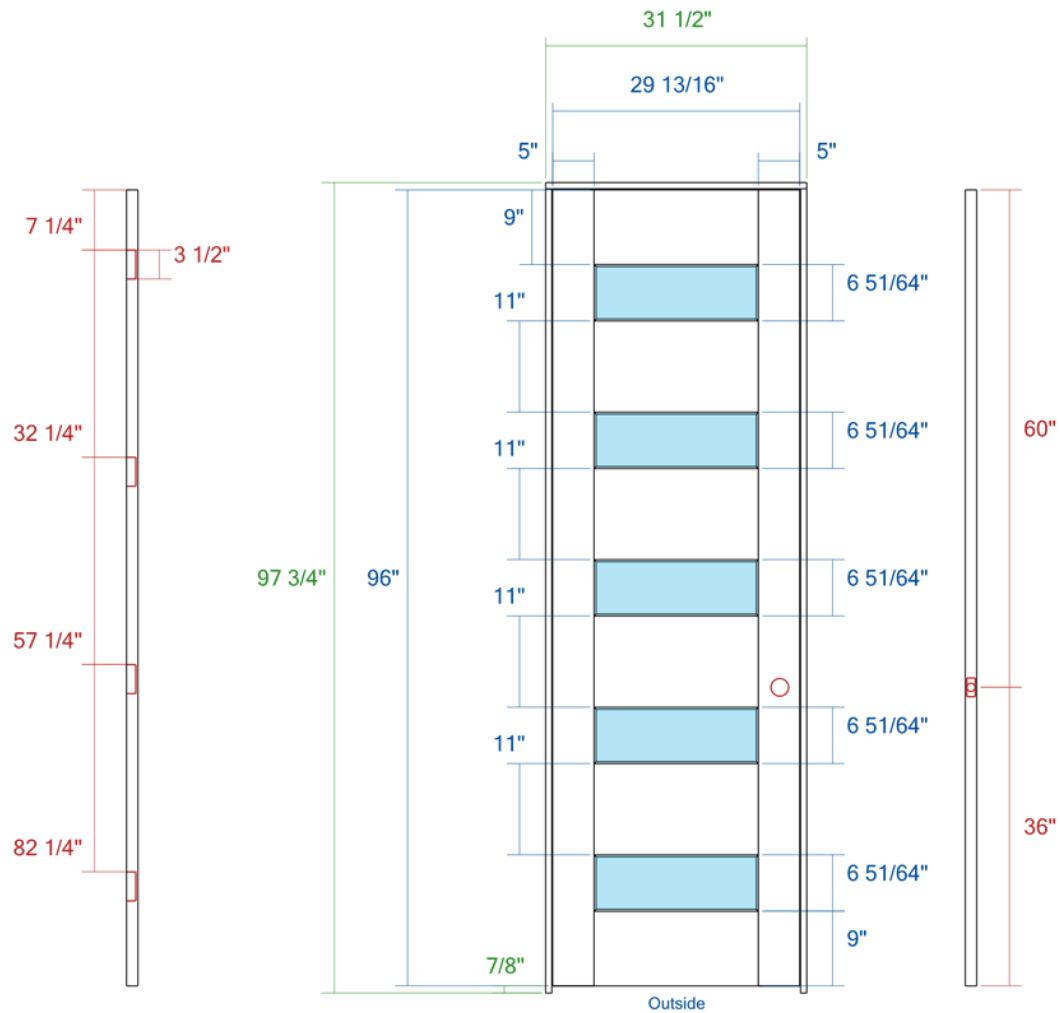


Jamb Width: 4 9/16"  
Jamb Stop: Applied (Square)

Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	NA	MDF	1/4" White Lami	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 19 - 28- 2680 LH LAMI		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 07/29/2021		



Created On: 07/29/2021

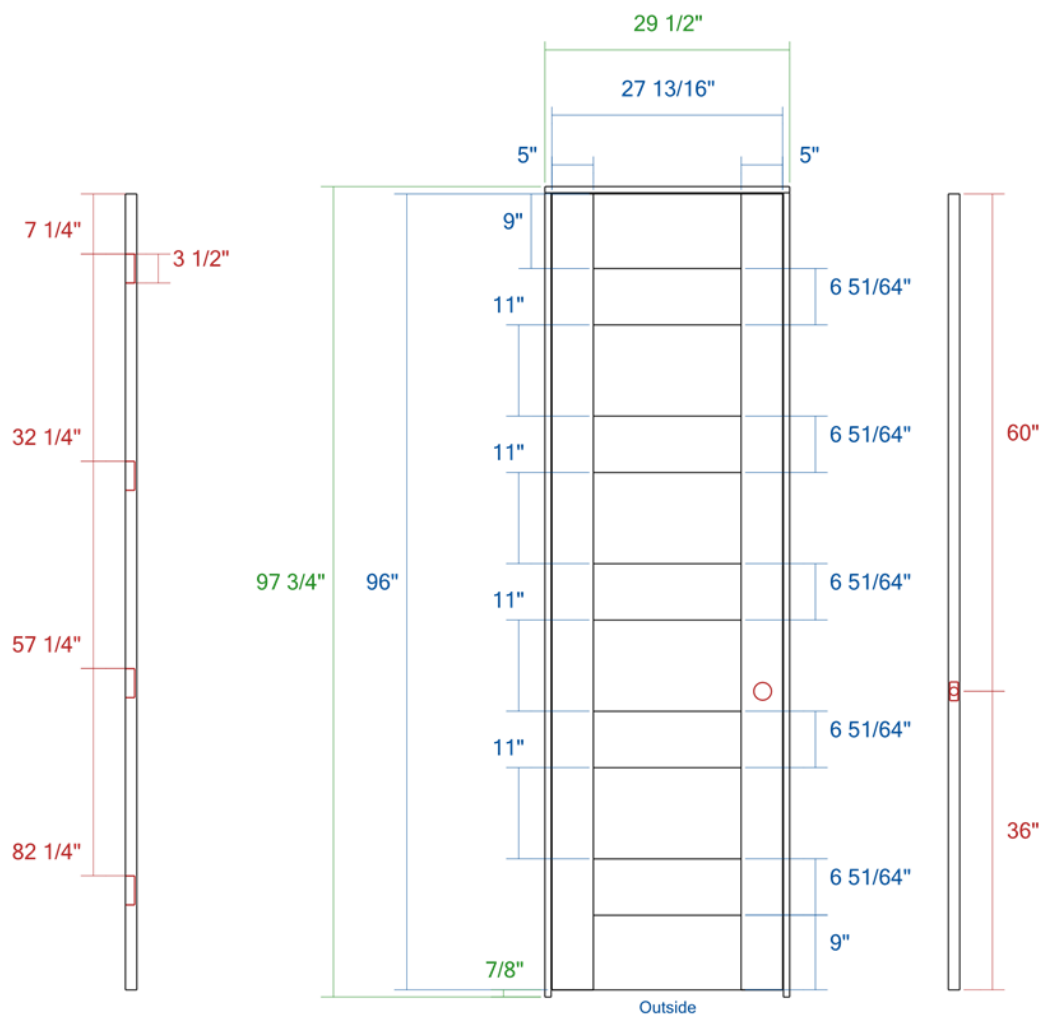

Jamb Width: 6 9/16"  
Jamb Stop: Applied (OG)

Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 21 - 30 - 2480 LH 6		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 07/29/2021		