

Quotation

SQDRQ000332-1

Job Name: EVERETT RESIDENCE

Quote Date: 11/19/2021

Manufacturer's Estimated Lead Time: 9-10 Weeks

Account Manager: Jim Britt

Dealer

Ervin Architectural Products
1255 Carolina Rd
Suffolk, VA 23434

Customer

Line	Label	Qty	UOM	Description	Unit	Extended
1	11 - GYM	1	EA	29 13/16 inch X 96 inch (Per Leaf), 1 3/8, TM1000, Swing, Pair, TruStile Interior MDF Door, SS-Square Stick Sticking, Prehung, Bevel Meeting Stiles, Center Meet Pair Reverse, Prime, Wedge	\$1,960.97	\$1,960.97

Panel Substitution = Replace All Panels with Glass
Glass = 1/4" Clear
T-Astragal = No Astragal

*****Door Machining Details*****

Machine Prep = TruStile Standard Configuration
Machine Prep = Hinges, Ball Catch

Hinges = TruStile Installed
Hinges = Standard Ball Bearing Hinges
Hinges = Brand: TruStile
Hinges = Qty: 4 per leaf - Size: 3-1/2" x 3-1/2" - Corners: Square
Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4", Hinge 4: 82-1/4"
Hinges = Thickness: 0.125" - Backset: 1/4"
Hinges = Material: Plated Steel
Hinges = Finish: US19-Flat Black

Ball Catch = TruStile Installed
Ball Catch = Standard Ball Catch
Ball Catch = Prep on Top of Door
Ball Catch = Brand: Hager, Model: 1447, Template: I-TA00064, Template Revision: 02
Ball Catch = US19-Flat Black
Ball Catch = Backset: 2 3/4" From Edge of Door

*****Pre-Hanging Details*****

Jamb Fire Rating = Non-Rated
Jamb Opening Type = Interior
Jamb Profile = Flat
Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Edge = Radius
Jamb Thickness = 3/4
Jamb Width = 6 9/16
Jamb Stop Profile = Square
Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Stop Width = 1 1/2"
Jamb Stop Thickness = 3/8"
Jamb Leg Extension = 7/8"

*****Jamb Machining Details*****

Jamb Head Prep = Ball Catch Strike: See Template
Jamb Leg Prep = Hinge Prep: Standard Hinge

Line	Label	Qty	UOM	Description	Unit	Extended
------	-------	-----	-----	-------------	------	----------

2	11 - GYM TSM	1	EA	59 11/16 inch X 36 inch, 1 3/8, TRG100, Transom, Single, TruStile Interior MDF, SS-Square Stick Sticking, Wrapped and Assembled, Prime, Wedge	\$972.77	\$972.77
---	-----------------	---	----	---	----------	----------

Glass = 1/4" Clear
 Jamb Fire Rating = Non-Rated
 Jamb Opening Type = 4-Sided
 Wrapping Type = Center Aligned
 Jamb Profile = Flat
 Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)
 Jamb Edge = Radius
 Jamb Thickness = 3/4
 Jamb Width = 4 9/16
 Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)
 Outside Jamb Stop = Ogee - Shipped with Stop Applied
 Inside Jamb Stop = Ogee - Shipped with Stop Applied
 Jamb Stop Width = 1 1/2"
 Jamb Stop Thickness = 3/8"

Line	Label	Qty	UOM	Description	Unit	Extended
3	13 - GARAGE 2	1	EA	35 13/16 inch X 96 inch, 1 3/4, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prehung, Bevel Lock Side, Unknown Handing, Prime, Wedge	\$713.57	\$713.57

*****Door Machining Details*****

Machine Prep = TruStile Standard Configuration
 Machine Prep = Hinges, Lock Bore, Deadbolt Bore

Hinges = TruStile Installed
 Hinges = Standard Ball Bearing Hinges
 Hinges = Brand: TruStile
 Hinges = Qty: 4 - Size: 4" x 4" - Corners: Square
 Hinges = Locations: Hinge 1: 7", Hinge 2: 32", Hinge 3: 57", Hinge 4: 82"
 Hinges = Thickness: 0.130" - Backset: 1/4"
 Hinges = Material: Plated Steel
 Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware
 Lock Bore = Standard Double Bore
 Lock Bore = Location (ToD): 60" - Location (BoD): 36"
 Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"
 Radius Edge Prep -

Deadbolt Bore = Prep For Hardware
 Deadbolt Bore = Standard Deadbolt Bore
 Deadbolt Bore = Location (ToD): 54 1/2" - Location (BoD): 41 1/2"
 Deadbolt Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4" Radius Edge Prep

*****Pre-Hanging Details*****

Jamb Fire Rating = Non-Rated
 Jamb Opening Type = Interior
 Jamb Profile = Flat
 Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)
 Jamb Edge = Radius
 Jamb Thickness = 3/4
 Jamb Width = 6 9/16
 Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)
 Jamb Stop Profile = Ogee
 Jamb Stop Width = 1 1/2"
 Jamb Stop Thickness = 3/8"
 Jamb Leg Extension = 7/8"

*****Jamb Machining Details*****

Jamb Leg Prep = Hinge Prep: Standard Hinge
 Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike
 Jamb Leg Prep = Deadbolt Bore Strike: 2-3/4" x 1-1/8" Radius Corner

Line	Label	Qty	UOM	Description	Unit	Extended
4	14 - 2680 RH	4	EA	29 13/16 inch X 96 inch, 1 3/8, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prehung, Bevel Lock Side, RH, Prime, Wedge	\$590.14	\$2,360.57

*****Door Machining Details*****

Machine Prep = TruStile Standard Configuration

Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed

Hinges = Standard Ball Bearing Hinges

Hinges = Brand: TruStile

Hinges = Qty: 4 - Size: 3-1/2" x 3-1/2" - Corners: Square

Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",
Hinge 4: 82-1/4"

Hinges = Thickness: 0.125" - Backset: 1/4"

Hinges = Material: Plated Steel

Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware

Lock Bore = Standard Single Bore

Lock Bore = Location (ToD): 60" - Location (BoD): 36"

Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"

Radius Edge Prep -

*****Pre-Hanging Details*****

Jamb Fire Rating = Non-Rated

Jamb Opening Type = Interior

Jamb Profile = Flat

Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)

Jamb Edge = Radius

Jamb Thickness = 3/4

Jamb Width = 4 9/16

Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)

Jamb Stop Profile = Ogee

Jamb Stop Width = 1 1/2"

Jamb Stop Thickness = 3/8"

Jamb Leg Extension = 7/8"

*****Jamb Machining Details*****

Jamb Leg Prep = Hinge Prep: Standard Hinge

Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
5	14 - PANTRY	1	EA	29 13/16 inch X 96 inch, 1 3/8, TM1000, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, Prehung, Bevel Lock Side, RH, Prime, Wedge	\$1,339.20	\$1,339.20

Panel Substitution = Replace All Panels with Glass
Glass = 1/4" White Lami

*****Door Machining Details*****

Machine Prep = TruStile Standard Configuration
Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed
Hinges = Standard Ball Bearing Hinges
Hinges = Brand: TruStile
Hinges = Qty: 4 - Size: 3-1/2" x 3-1/2" - Corners: Square
Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",
Hinge 4: 82-1/4"
Hinges = Thickness: 0.125" - Backset: 1/4"
Hinges = Material: Plated Steel
Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware
Lock Bore = Standard Single Bore
Lock Bore = Location (ToD): 60" - Location (BoD): 36"
Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"
Radius Edge Prep -

*****Pre-Hanging Details*****

Jamb Fire Rating = Non-Rated
Jamb Opening Type = Interior
Jamb Profile = Flat
Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Edge = Radius
Jamb Thickness = 3/4
Jamb Width = 4 9/16
Jamb Stop Profile = Ogee
Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Stop Width = 1 1/2"
Jamb Stop Thickness = 3/8"
Jamb Leg Extension = 7/8"

*****Jamb Machining Details*****

Jamb Leg Prep = Hinge Prep: Standard Hinge
Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
6	15 - 2680 POCKET	6	EA	30 inch X 96 inch, 1 3/8, TM5100, Pocket, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prime, Wedge	\$510.69	\$3,064.11

LVL Stiles = Yes

Line	Label	Qty	UOM	Description	Unit	Extended
7	16 - 4080 PRIV LAMI	2	EA	23 13/16 inch X 96 inch (Per Leaf), 1 3/8, TM5100, Swing, Pair, TruStile Interior MDF Door, SS-Square Stick Sticking, Prehung, Bevel Lock Side of Active Door, RH Active in Pair, Prime, Wedge	\$2,773.29	\$5,546.57

Panel Substitution = Replace All Panels with Glass
Glass = 1/4" White Lami
T-Astragal = Astragal Supplied

*****Door Machining Details*****

Machine Prep = TruStile Standard Configuration
Machine Prep = Hinges, Lock Bore, Flushbolt

Hinges = TruStile Installed
Hinges = Standard Ball Bearing Hinges
Hinges = Brand: TruStile
Hinges = Qty: 4 per leaf - Size: 3-1/2" x 3-1/2" - Corners: Square
Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",
Hinge 4: 82-1/4"
Hinges = Thickness: 0.125" - Backset: 1/4"
Hinges = Material: Plated Steel
Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware
Lock Bore = Standard Single Bore
Lock Bore = Location (ToD): 60" - Location (BoD): 36"
Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"
Radius Edge Prep -

Top Flushbolt = TruStile Installed
Top Flushbolt = Standard Flushbolt
Top Flushbolt = Extension: 18"
Top Flushbolt = Brand: Hager, Model: 282, Template: T-TA00177
Top Flushbolt = Flushbolt Finish: US19-Flat Black

Bottom Flushbolt = TruStile Installed
Bottom Flushbolt = Standard Flushbolt
Bottom Flushbolt = Extension: None
Bottom Flushbolt = Brand: Hager, Model: 281, Template: T281D
Bottom Flushbolt = Flushbolt Finish: US19-Flat Black

Astragal/Door Edge Strike (Inactive Leaf) = Lock Bore Strike
Astragal/Door Edge Strike (Inactive Leaf) = 2-1/4" Radius Lip Strike

*****Pre-Hanging Details*****

Jamb Fire Rating = Non-Rated
Jamb Opening Type = Interior
Jamb Profile = Flat
Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Edge = Radius
Jamb Thickness = 3/4
Jamb Width = 4 9/16
Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Stop Profile = Ogee
Jamb Stop Width = 1 1/2"
Jamb Stop Thickness = 3/8"
Jamb Leg Extension = 7/8"

*****Jamb Machining Details*****

Jamb Head Prep = Flushbolt Head Strike: SeeTemplate
Jamb Leg Prep = Hinge Prep: Standard Hinge

Line	Label	Qty	UOM	Description	Unit	Extended
8	17 - 2680 DBL POCKET	1	EA	30 inch X 96 inch, 1 3/8, TM5100, Pocket, Pair, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prime, Wedge	\$975.09	\$975.09

LVL Stiles = Yes

Line	Label	Qty	UOM	Description	Unit	Extended
9	18 - 2880 POCKET	1	EA	32 inch X 96 inch, 1 3/8, TM5100, Pocket, Single, TruStile Interior MDF Door, SS- Square Stick Sticking, C-Flat Panel, Prime, Wedge	\$491.40	\$491.40

LVL Stiles = Yes

Line	Label	Qty	UOM	Description	Unit	Extended
10	19 - 2080 RH	1	EA	23 13/16 inch X 96 inch, 1 3/8, TM5100, Swing, Single, TruStile Interior MDF Door, SS- Square Stick Sticking, C-Flat Panel, Prehung, Bevel Lock Side, RH, Prime, Wedge	\$570.09	\$570.09

*****Door Machining Details*****

Machine Prep = TruStile Standard Configuration

Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed

Hinges = Standard Ball Bearing Hinges

Hinges = Brand: TruStile

Hinges = Qty: 4 - Size: 3-1/2" x 3-1/2" - Corners: Square

Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",
Hinge 4: 82-1/4"

Hinges = Thickness: 0.125" - Backset: 1/4"

Hinges = Material: Plated Steel

Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware

Lock Bore = Standard Single Bore

Lock Bore = Location (ToD): 60" - Location (BoD): 36"

Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"

Radius Edge Prep -

*****Pre-Hanging Details*****

Jamb Fire Rating = Non-Rated

Jamb Opening Type = Interior

Jamb Profile = Flat

Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)

Jamb Edge = Radius

Jamb Thickness = 3/4

Jamb Width = 4 9/16

Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)

Jamb Stop Profile = Square

Jamb Stop Width = 1 1/2"

Jamb Stop Thickness = 3/8"

Jamb Leg Extension = 7/8"

*****Jamb Machining Details*****

Jamb Leg Prep = Hinge Prep: Standard Hinge

Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
11	20- 2880 RH LAMI	2	EA	31 13/16 inch X 96 inch, 1 3/8, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, Prehung, Bevel Lock Side, RH, Prime, Wedge	\$1,404.00	\$2,808.00

Panel Substitution = Replace All Panels with Glass
Glass = 1/4" White Lami

*****Door Machining Details*****

Machine Prep = TruStile Standard Configuration
Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed
Hinges = Standard Ball Bearing Hinges
Hinges = Brand: TruStile
Hinges = Qty: 4 - Size: 3-1/2" x 3-1/2" - Corners: Square
Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",
Hinge 4: 82-1/4"
Hinges = Thickness: 0.125" - Backset: 1/4"
Hinges = Material: Plated Steel
Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware
Lock Bore = Standard Single Bore
Lock Bore = Location (ToD): 60" - Location (BoD): 36"
Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"
Radius Edge Prep -

*****Pre-Hanging Details*****

Jamb Fire Rating = Non-Rated
Jamb Opening Type = Interior
Jamb Profile = Flat
Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Edge = Radius
Jamb Thickness = 3/4
Jamb Width = 4 9/16
Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Stop Profile = Square
Jamb Stop Width = 1 1/2"
Jamb Stop Thickness = 3/8"
Jamb Leg Extension = 7/8"

*****Jamb Machining Details*****

Jamb Leg Prep = Hinge Prep: Standard Hinge
Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
12	21 - 2480 LH	2	EA	27 13/16 inch X 96 inch, 1 3/8, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prehung, Bevel Lock Side, LH, Prime, Wedge	\$590.14	\$1,180.29

*****Door Machining Details*****

Machine Prep = TruStile Standard Configuration
Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed
Hinges = Standard Ball Bearing Hinges
Hinges = Brand: TruStile
Hinges = Qty: 4 - Size: 3-1/2" x 3-1/2" - Corners: Square
Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",
Hinge 4: 82-1/4"
Hinges = Thickness: 0.125" - Backset: 1/4"
Hinges = Material: Plated Steel
Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware
Lock Bore = Standard Single Bore
Lock Bore = Location (ToD): 60" - Location (BoD): 36"
Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"
Radius Edge Prep -

*****Pre-Hanging Details*****

Jamb Fire Rating = Non-Rated
Jamb Opening Type = Interior
Jamb Profile = Flat
Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Edge = Radius
Jamb Thickness = 3/4
Jamb Width = 4 9/16
Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Stop Profile = Ogee
Jamb Stop Width = 1 1/2"
Jamb Stop Thickness = 3/8"
Jamb Leg Extension = 7/8"

*****Jamb Machining Details*****

Jamb Leg Prep = Hinge Prep: Standard Hinge
Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
13	22A - 2680 BYPASS	1	EA	30 inch X 96 inch, 1 3/8, TM5100, Sliding, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Unknown Handing, Prime, Wedge	\$487.54	\$487.54

LVL Stiles = Yes

Line	Label	Qty	UOM	Description	Unit	Extended
14	22B - 2680 BYPASS	1	EA	MODIFIED, 31 inch X 96 inch, 1 3/8, TM5100, Sliding, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Unknown Handing, Prime, Wedge	\$510.69	\$510.69

LVL Stiles = Yes

Comments

THIS SLAB TO BE 1" WIDER FOR OVERLAP

Line	Label	Qty	UOM	Description	Unit	Extended
15	23 - 2680 LH	5	EA	29 13/16 inch X 96 inch, 1 3/8, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prehung, Bevel Lock Side, LH, Prime, Wedge	\$590.14	\$2,950.71

*****Door Machining Details*****

Machine Prep = TruStile Standard Configuration
Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed
Hinges = Standard Ball Bearing Hinges
Hinges = Brand: TruStile
Hinges = Qty: 4 - Size: 3-1/2" x 3-1/2" - Corners: Square
Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",
Hinge 4: 82-1/4"
Hinges = Thickness: 0.125" - Backset: 1/4"
Hinges = Material: Plated Steel
Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware
Lock Bore = Standard Single Bore
Lock Bore = Location (ToD): 60" - Location (BoD): 36"
Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"
Radius Edge Prep -

*****Pre-Hanging Details*****

Jamb Fire Rating = Non-Rated
Jamb Opening Type = Interior
Jamb Profile = Flat
Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Edge = Radius
Jamb Thickness = 3/4
Jamb Width = 4 9/16
Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Stop Profile = Ogee
Jamb Stop Width = 1 1/2"
Jamb Stop Thickness = 3/8"
Jamb Leg Extension = 7/8"

*****Jamb Machining Details*****

Jamb Leg Prep = Hinge Prep: Standard Hinge
Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
16	24A - 2080 BYPASS	2	EA	24 inch X 96 inch, 1 3/8, TM5100, Sliding, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Unknown Handing, Prime, Wedge	\$467.49	\$934.97

LVL Stiles = Yes

Line	Label	Qty	UOM	Description	Unit	Extended
17	24B - 2080 BYPASS	2	EA	MODIFIED, 25 inch X 96 inch, 1 3/8, TM5100, Sliding, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Unknown Handing, Prime, Wedge	\$506.83	\$1,013.66

LVL Stiles = Yes

Comments

THIS SLAB TO BE 1" WIDER FOR OVERLAP

Line	Label	Qty	UOM	Description	Unit	Extended
18	25 - 2880 LH	3	EA	31 13/16 inch X 96 inch, 1 3/8, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prehung, Bevel Lock Side, LH, Prime, Wedge	\$594.00	\$1,782.00

*****Door Machining Details*****

Machine Prep = TruStile Standard Configuration

Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed

Hinges = Standard Ball Bearing Hinges

Hinges = Brand: TruStile

Hinges = Qty: 4 - Size: 3-1/2" x 3-1/2" - Corners: Square

Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",
Hinge 4: 82-1/4"

Hinges = Thickness: 0.125" - Backset: 1/4"

Hinges = Material: Plated Steel

Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware

Lock Bore = Standard Single Bore

Lock Bore = Location (ToD): 60" - Location (BoD): 36"

Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"

Radius Edge Prep -

*****Pre-Hanging Details*****

Jamb Fire Rating = Non-Rated

Jamb Opening Type = Interior

Jamb Profile = Flat

Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)

Jamb Edge = Radius

Jamb Thickness = 3/4

Jamb Width = 4 9/16

Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)

Jamb Stop Profile = Ogee

Jamb Stop Width = 1 1/2"

Jamb Stop Thickness = 3/8"

Jamb Leg Extension = 7/8"

*****Jamb Machining Details*****

Jamb Leg Prep = Hinge Prep: Standard Hinge

Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
19	28- 2680 LH LAMI	1	EA	29 13/16 inch X 96 inch, 1 3/8, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, Prehung, Bevel Lock Side, LH, Prime, Wedge	\$1,400.14	\$1,400.14

Panel Substitution = Replace All Panels with Glass
Glass = 1/4" White Lami

*****Door Machining Details*****

Machine Prep = TruStile Standard Configuration
Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed
Hinges = Standard Ball Bearing Hinges
Hinges = Brand: TruStile
Hinges = Qty: 4 - Size: 3-1/2" x 3-1/2" - Corners: Square
Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",
Hinge 4: 82-1/4"
Hinges = Thickness: 0.125" - Backset: 1/4"
Hinges = Material: Plated Steel
Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware
Lock Bore = Standard Single Bore
Lock Bore = Location (ToD): 60" - Location (BoD): 36"
Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"
Radius Edge Prep -

*****Pre-Hanging Details*****

Jamb Fire Rating = Non-Rated
Jamb Opening Type = Interior
Jamb Profile = Flat
Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Edge = Radius
Jamb Thickness = 3/4
Jamb Width = 4 9/16
Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Stop Profile = Square
Jamb Stop Width = 1 1/2"
Jamb Stop Thickness = 3/8"
Jamb Leg Extension = 7/8"

*****Jamb Machining Details*****

Jamb Leg Prep = Hinge Prep: Standard Hinge
Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
20	29 - GARAGE 1	1	EA	35 13/16 inch X 96 inch, 1 3/4, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prehung, Bevel Lock Side, LHR, 20 Minute Neutral Pressure Fire Rating, Prime, Wedge	\$1,109.31	\$1,109.31

Fire Label = Machined and Labeled

*****Door Machining Details*****

Machine Prep = TruStile Standard Configuration
Machine Prep = Hinges, Lock Bore, Deadbolt Bore

Hinges = TruStile Installed
Hinges = Standard Spring Hinges
Hinges = Brand: TruStile
Hinges = Qty: 4 - Size: 4" x 4" - Corners: Square
Hinges = Locations: Hinge 1: 7", Hinge 2: 32", Hinge 3: 57", Hinge 4: 82"
Hinges = Thickness: 0.130" - Backset: 1/4"
Hinges = Material: Plated Steel
Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware
Lock Bore = Standard Double Bore
Lock Bore = Location (ToD): 60" - Location (BoD): 36"
Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"
Radius Edge Prep -

Deadbolt Bore = Prep For Hardware
Deadbolt Bore = Standard Deadbolt Bore
Deadbolt Bore = Location (ToD): 54 1/2" - Location (BoD): 41 1/2"
Deadbolt Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"
1/4" Radius Edge Prep

*****Pre-Hanging Details*****

Jamb Fire Rating = 20 Minute
Jamb Opening Type = House to Garage
Jamb Profile = Single Rabbet
Jamb Material = Poplar (Paint-Grade) (Primed)
Jamb Edge = Radius
Jamb Thickness = 3/4
Jamb Width = 4 9/16
Kerf for Weatherstripping = Yes
Weatherstripping = Bronze
Sill & Sweep = Composite Bumper Sill (Bronze Finish)
Jamb Leg Extension = 1/2"

*****Jamb Machining Details*****

Jamb Leg Prep = Hinge Prep: Standard Hinge
Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike
Jamb Leg Prep = Deadbolt Bore Strike: 2-3/4" x 1-1/8" Radius Corner

Line	Label	Qty	UOM	Description	Unit	Extended
21	30 - 2480 LH 6	1	EA	27 13/16 inch X 96 inch, 1 3/8, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prehung, Bevel Lock Side, LH, Prime, Wedge	\$628.71	\$628.71

*****Door Machining Details*****

Machine Prep = TruStile Standard Configuration

Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed

Hinges = Standard Ball Bearing Hinges

Hinges = Brand: TruStile

Hinges = Qty: 4 - Size: 3-1/2" x 3-1/2" - Corners: Square

Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",
Hinge 4: 82-1/4"

Hinges = Thickness: 0.125" - Backset: 1/4"

Hinges = Material: Plated Steel

Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware

Lock Bore = Standard Single Bore

Lock Bore = Location (ToD): 60" - Location (BoD): 36"

Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"

Radius Edge Prep -

*****Pre-Hanging Details*****

Jamb Fire Rating = Non-Rated

Jamb Opening Type = Interior

Jamb Profile = Flat

Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)

Jamb Edge = Radius

Jamb Thickness = 3/4

Jamb Width = 6 9/16

Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)

Jamb Stop Profile = Ogee

Jamb Stop Width = 1 1/2"

Jamb Stop Thickness = 3/8"



Jamb Leg Extension = 7/8"

*****Jamb Machining Details*****


Jamb Leg Prep = Hinge Prep: Standard Hinge

Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike


Line	Label	Qty	UOM	Description	Unit	Extended
22		1	EA	Manufacturer's Freight for 44 Doors	\$421.43	\$421.43
						Tax (6.00%): \$1,993.31
Total Units: 40						Total: \$35,215.11

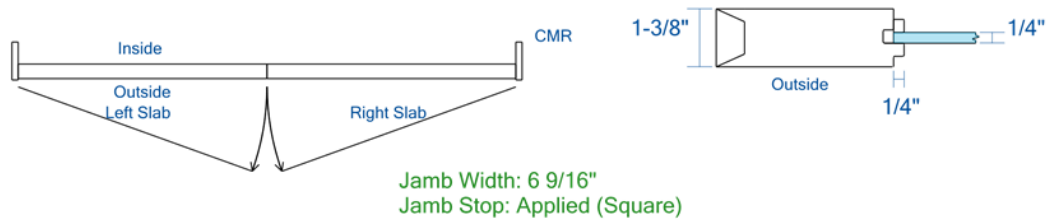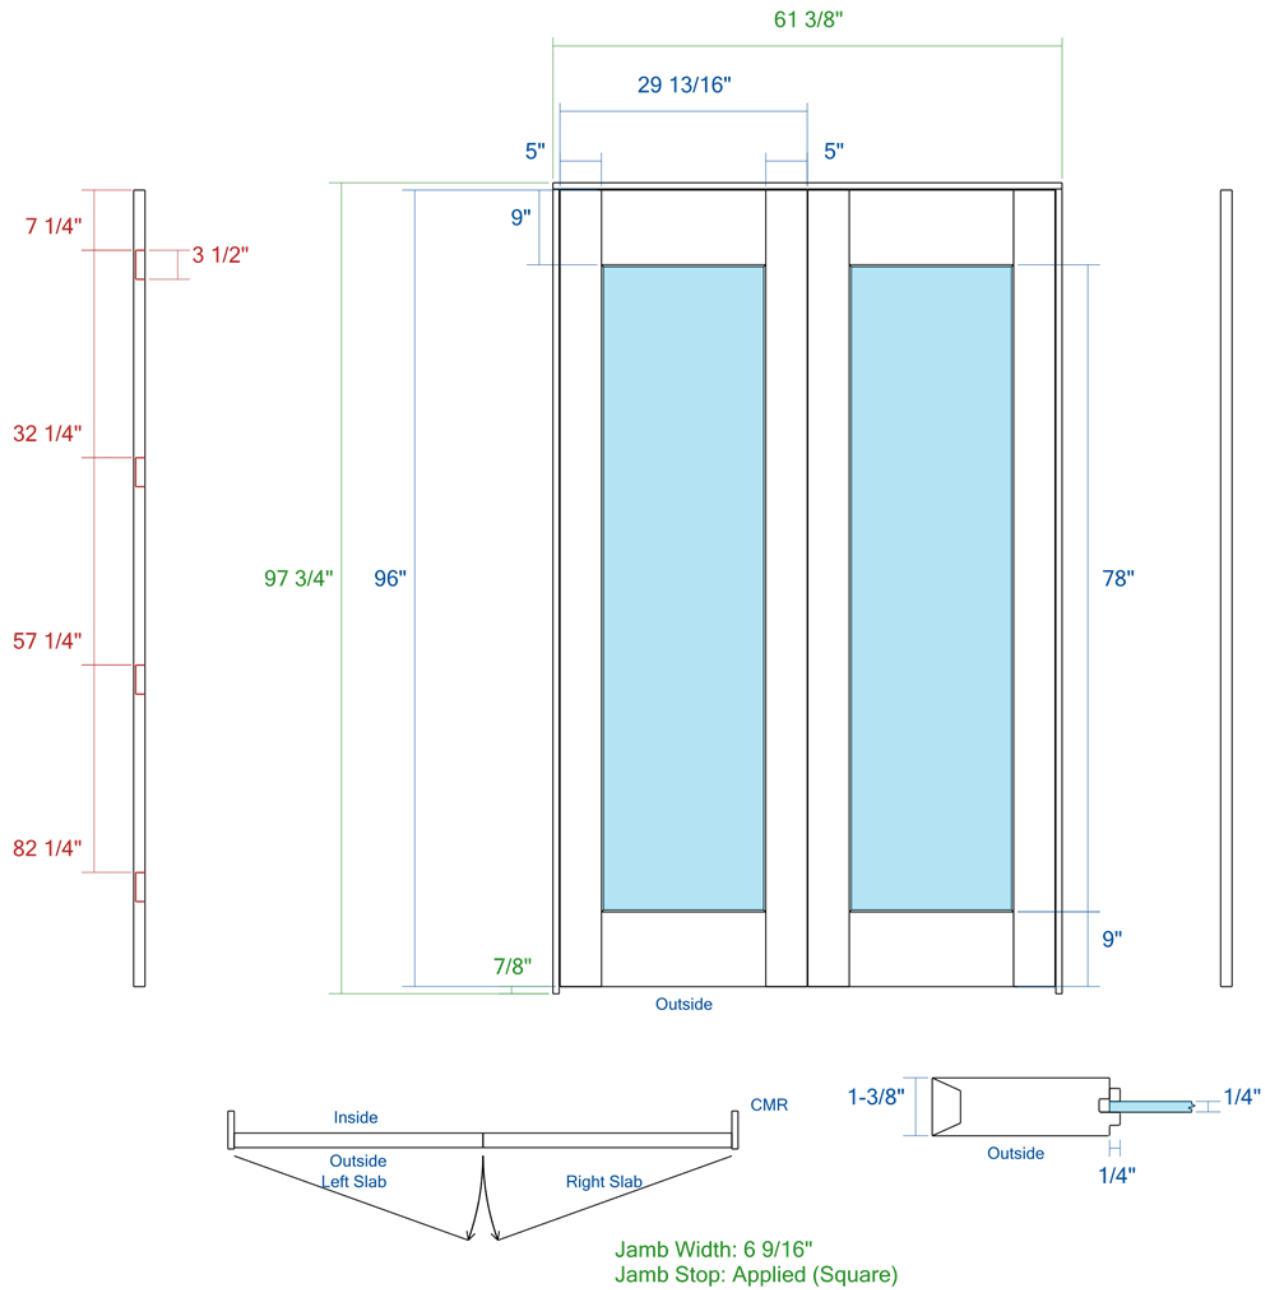


Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM1000	SS	NA	MDF	1/4" Clear	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 1 - 11 - GYM		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 11/19/2021		

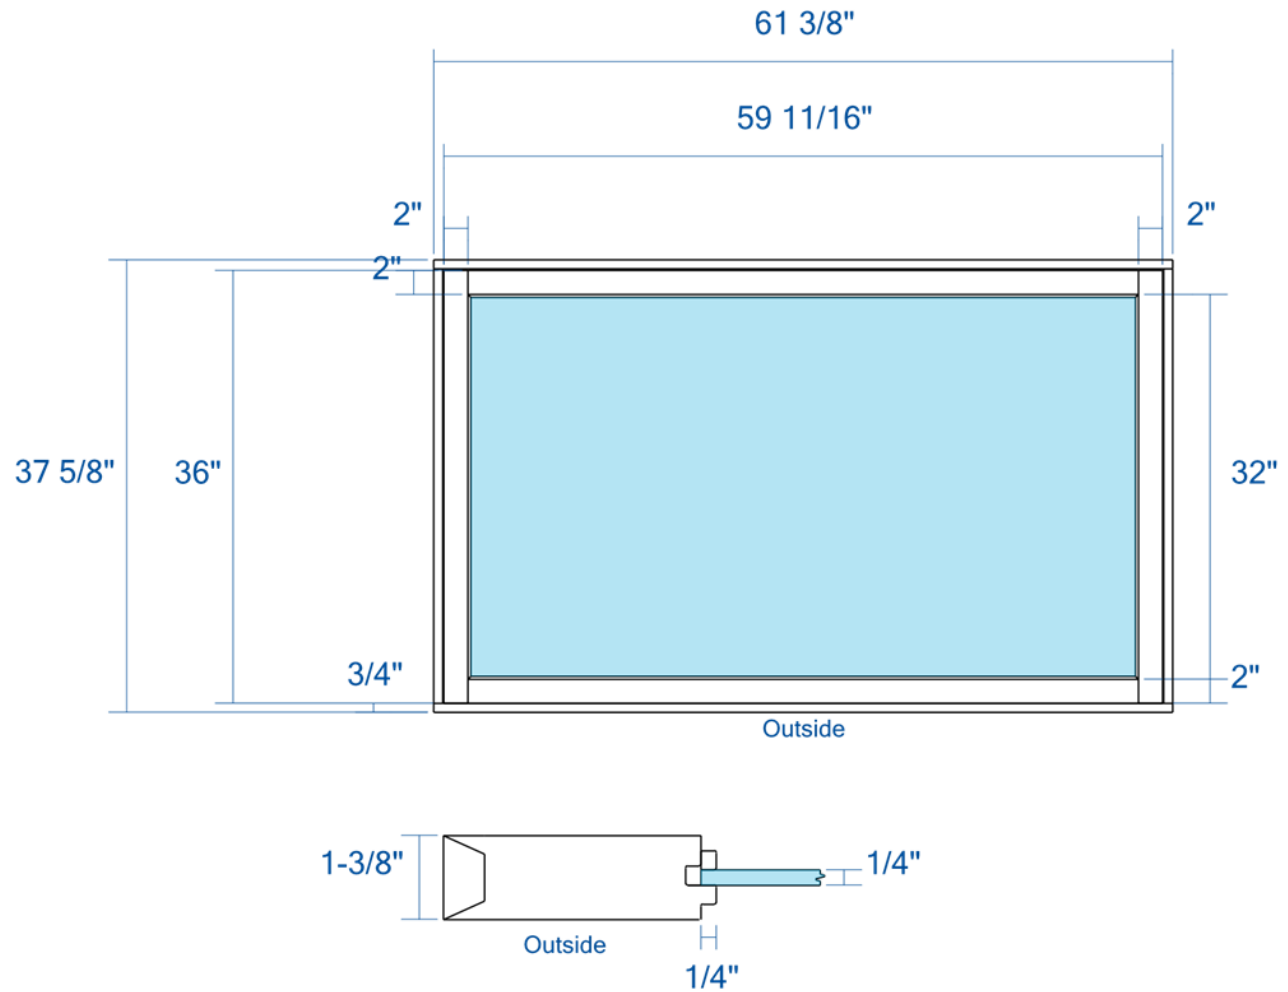


Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TRG100	SS	NA	MDF	1/4" Clear	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 2 - 11 - GYM TSM		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 11/19/2021		

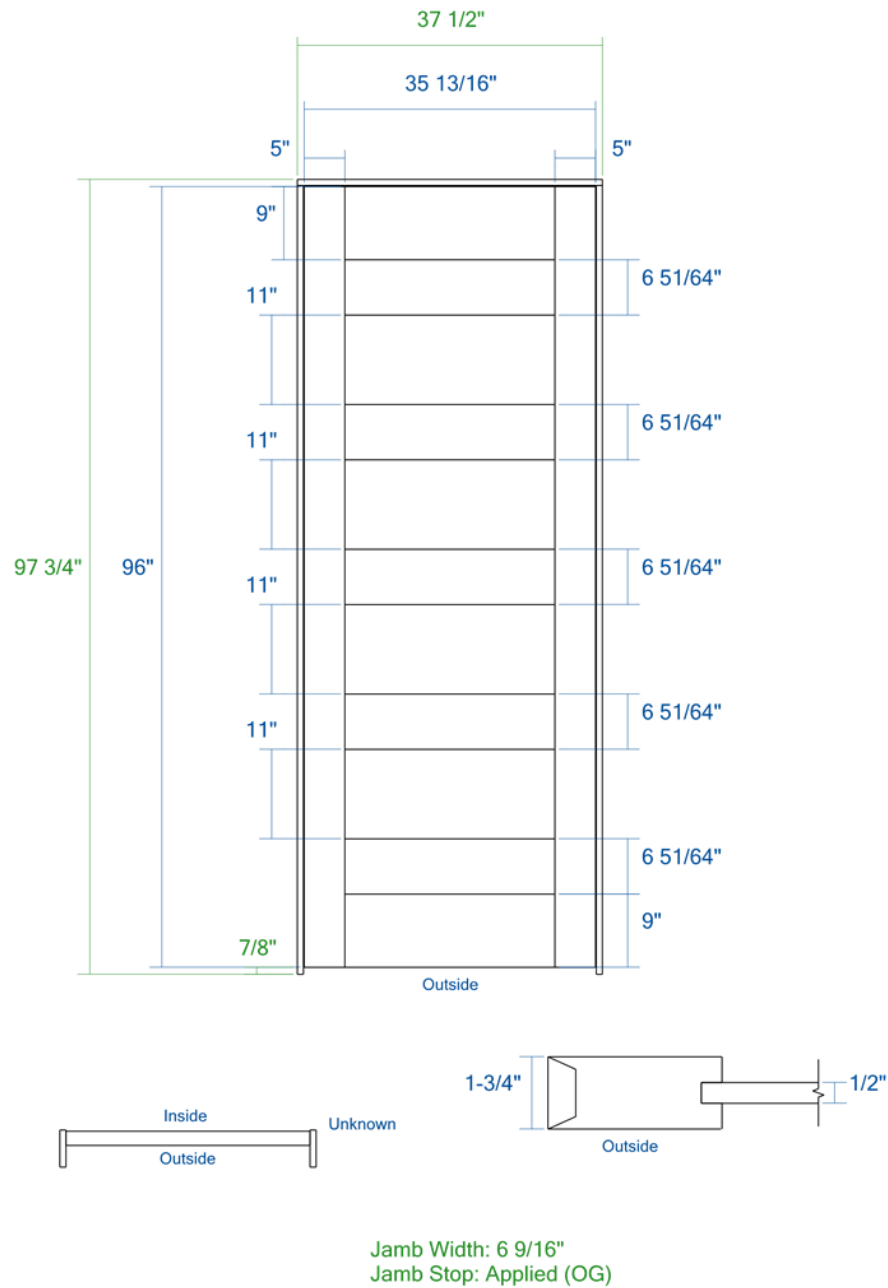


Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 3 - 13 - GARAGE 2		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 11/19/2021		





Created On: 11/19/2021

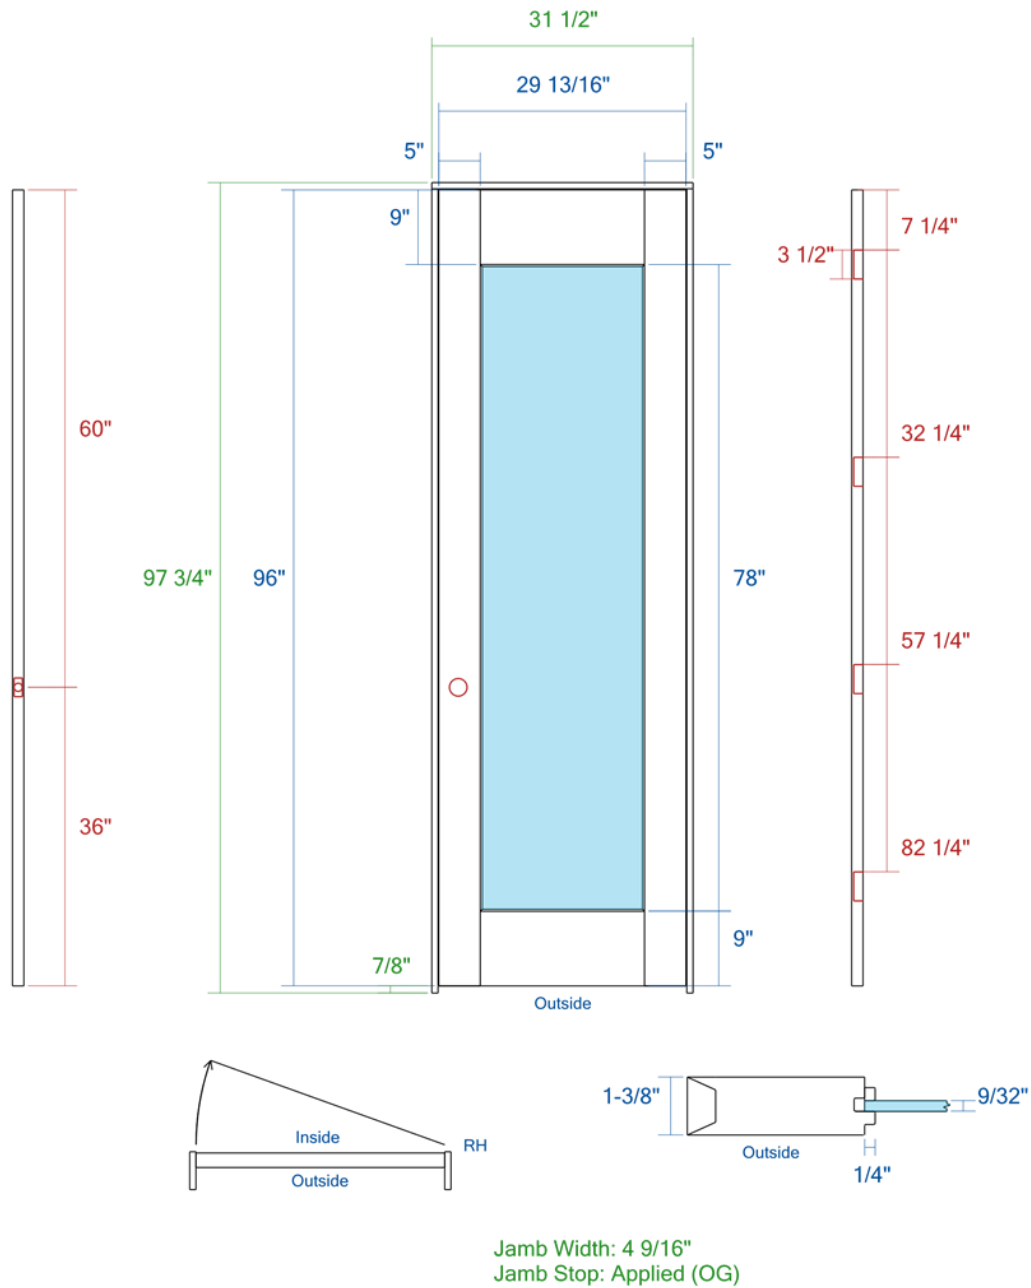

Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM1000	SS	NA	MDF	1/4" White Lami	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 5 - 14 - PANTRY		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 11/19/2021		

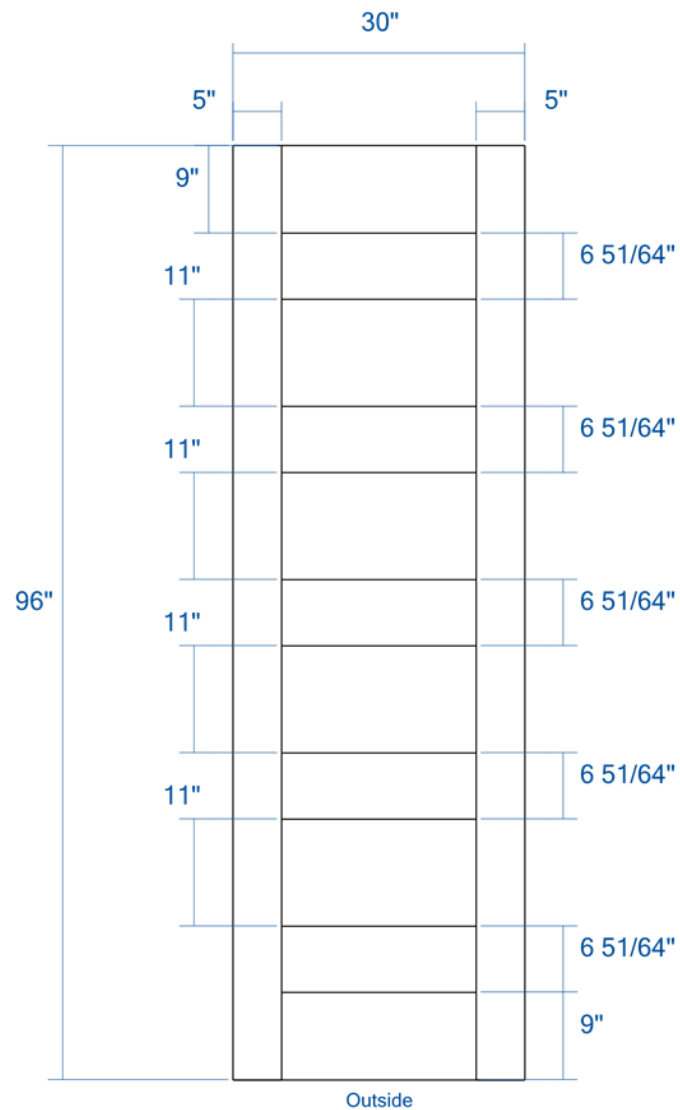


Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 6 - 15 - 2680 POCKET		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 11/19/2021		

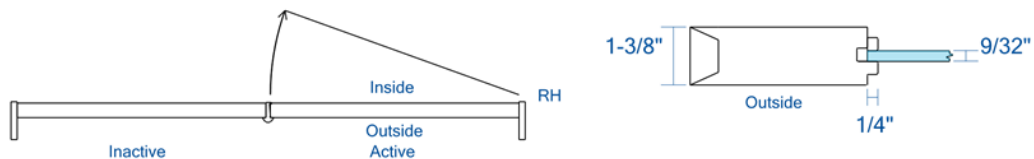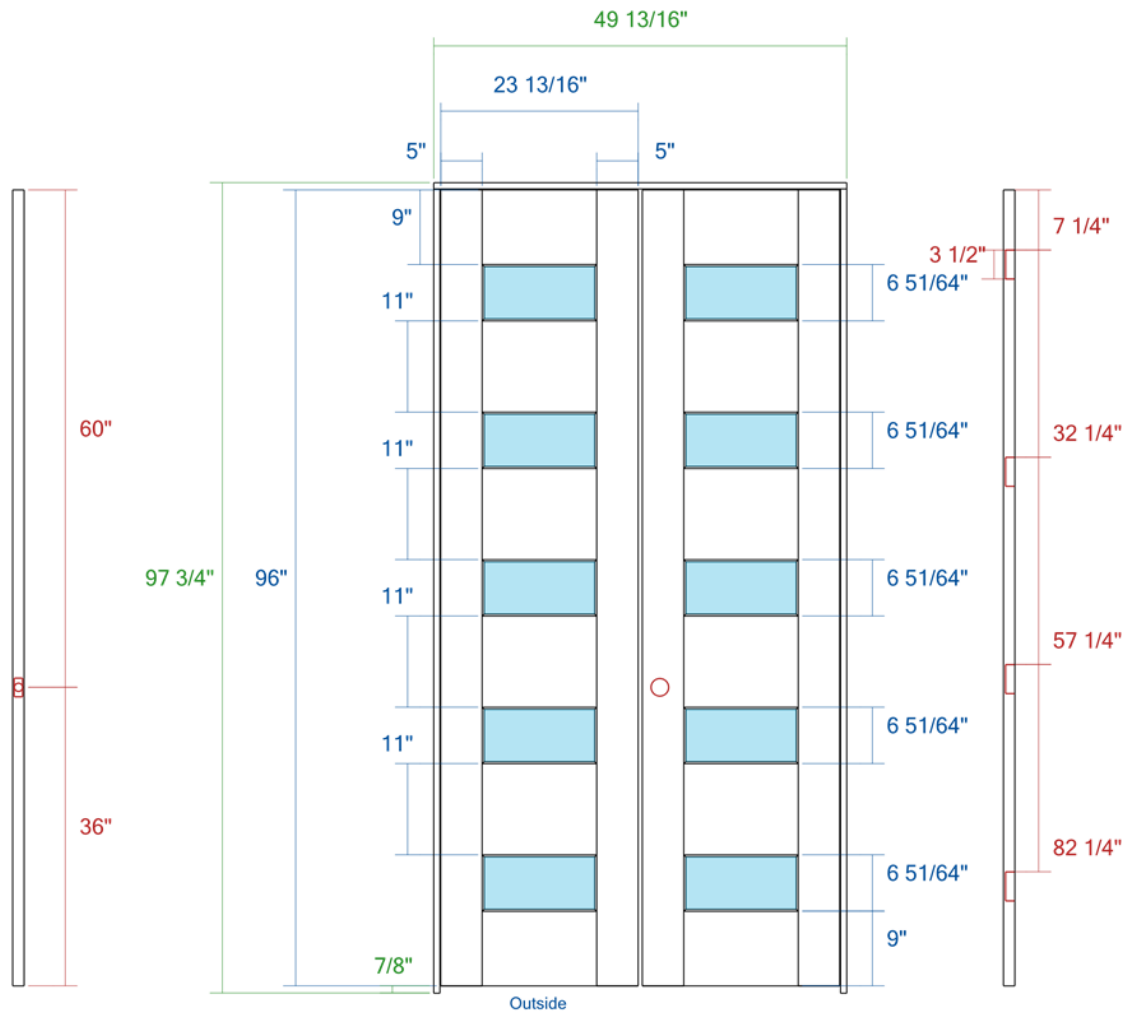


Jamb Width: 4 9/16"
Jamb Stop: Applied (OG)


Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	NA	MDF	1/4" White Lami	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 7 - 16 - 4080 PRIV LAMI		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 11/19/2021		

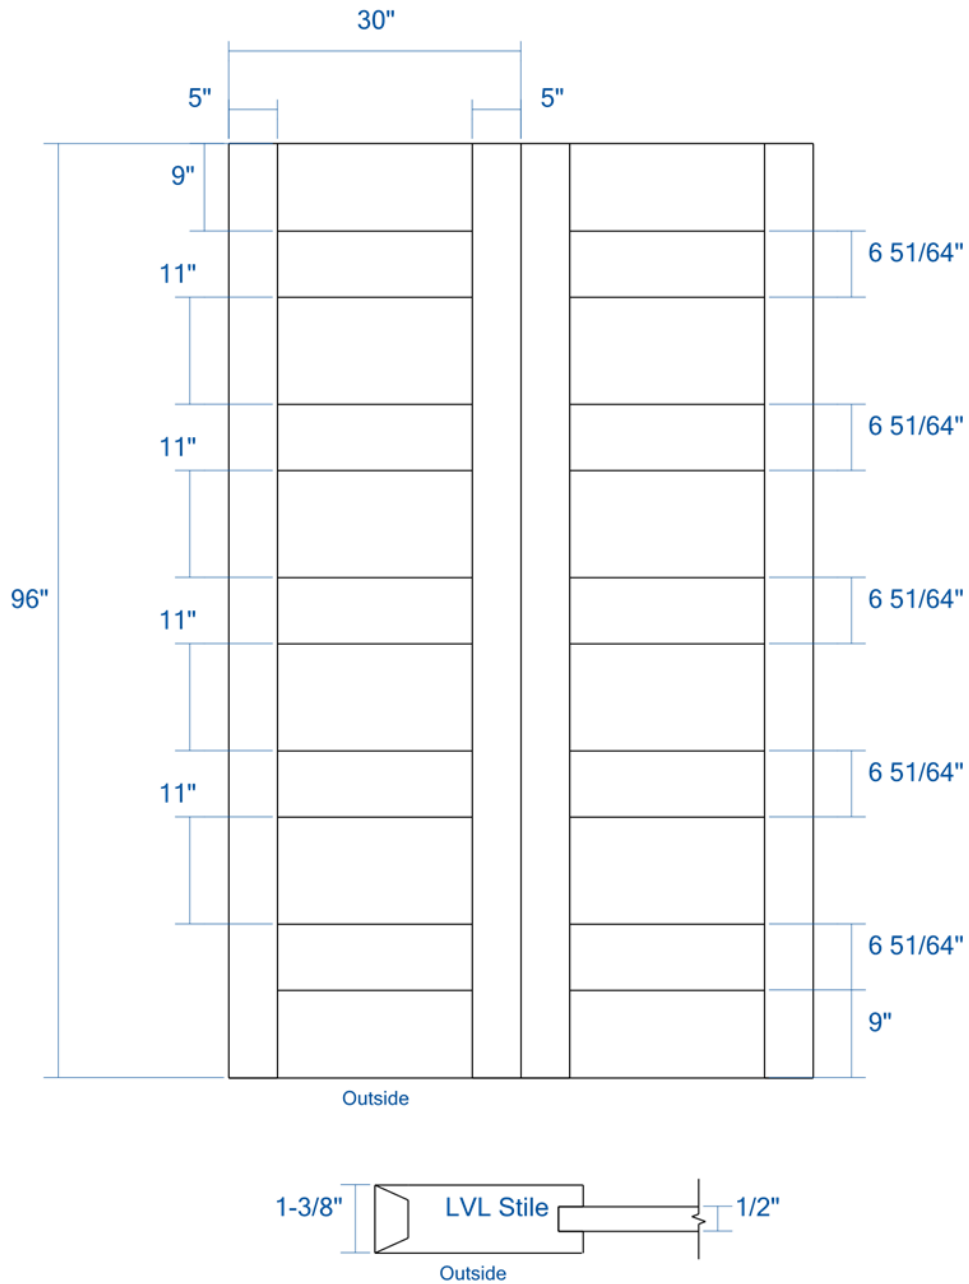


Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 8 - 17 - 2680 DBL POCKET		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 11/19/2021		

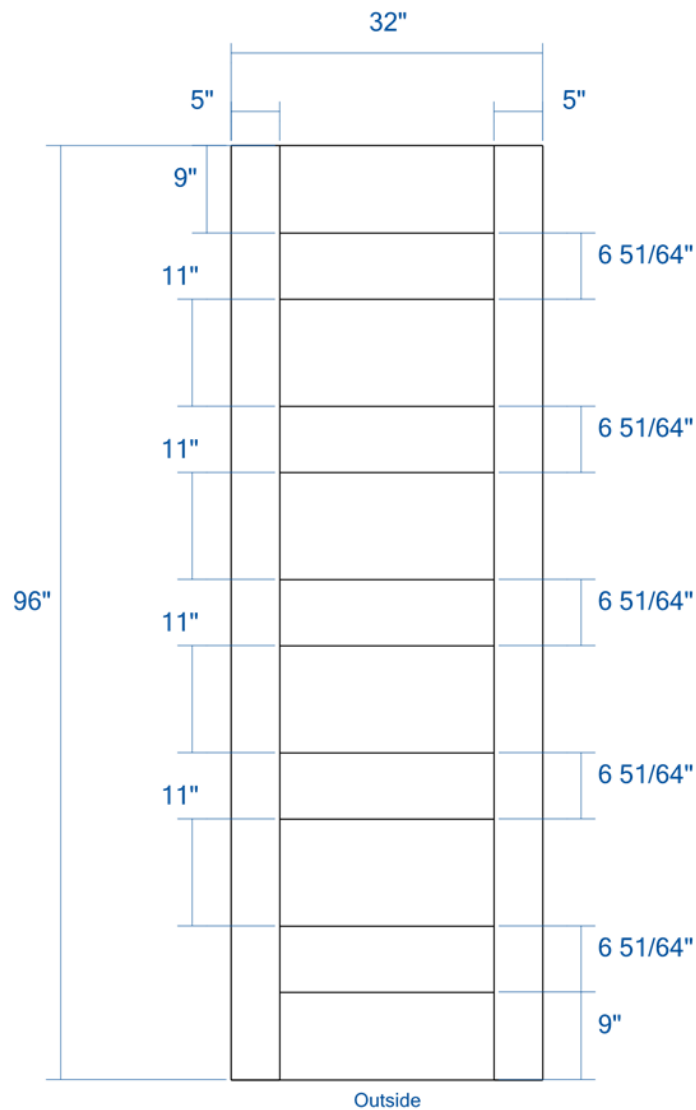


Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 9 - 18 - 2880 POCKET		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 11/19/2021		

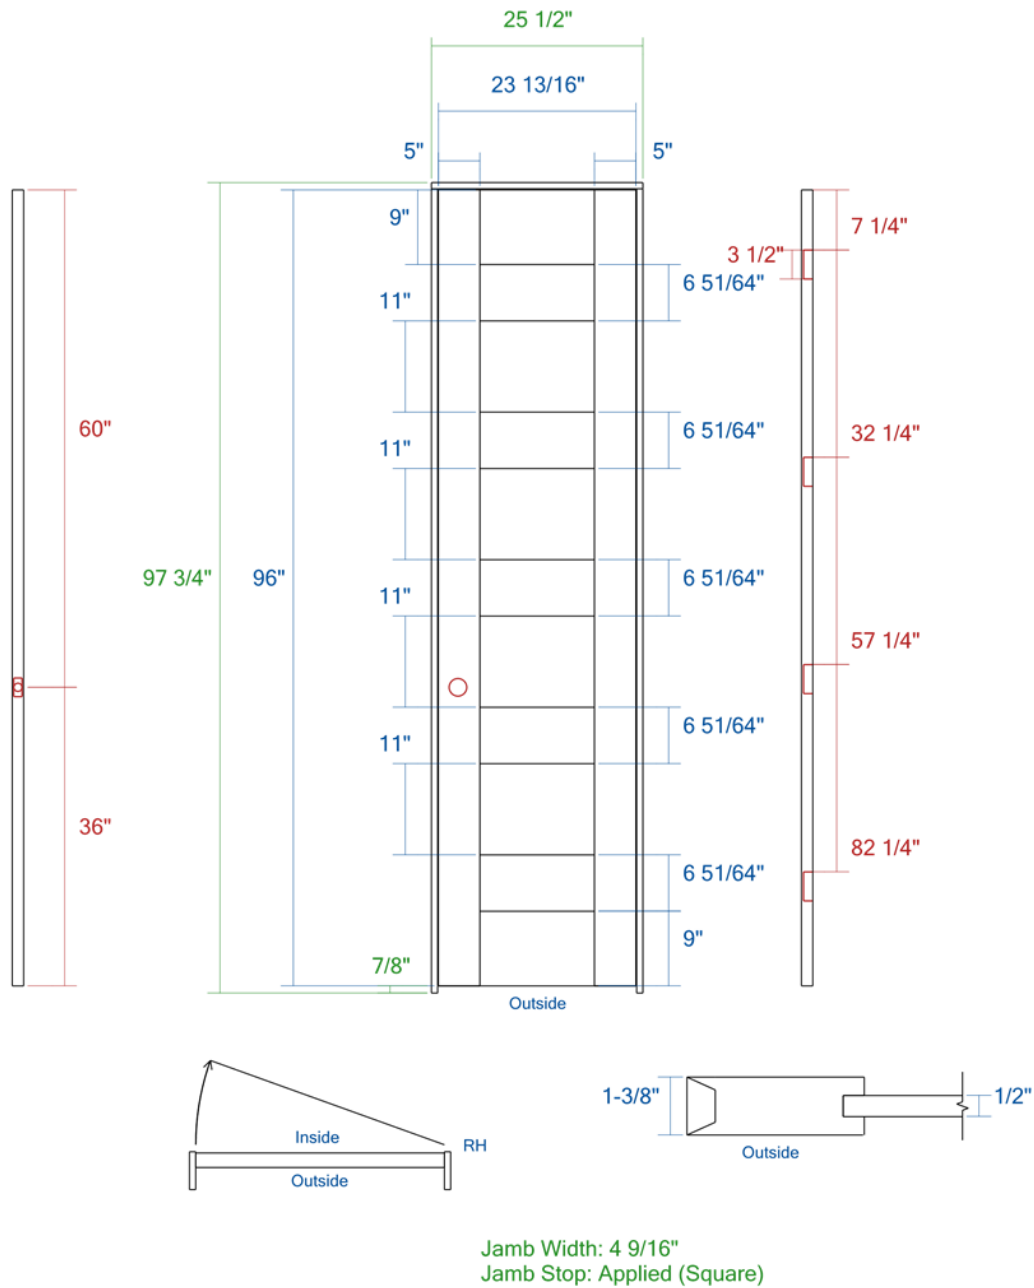

Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 10 - 19 - 2080 RH		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 11/19/2021		

Page 24 of 34




Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior


Line #: 12 - 21 - 2480 LH

Entered By: David Canton


Created On: 11/19/2021

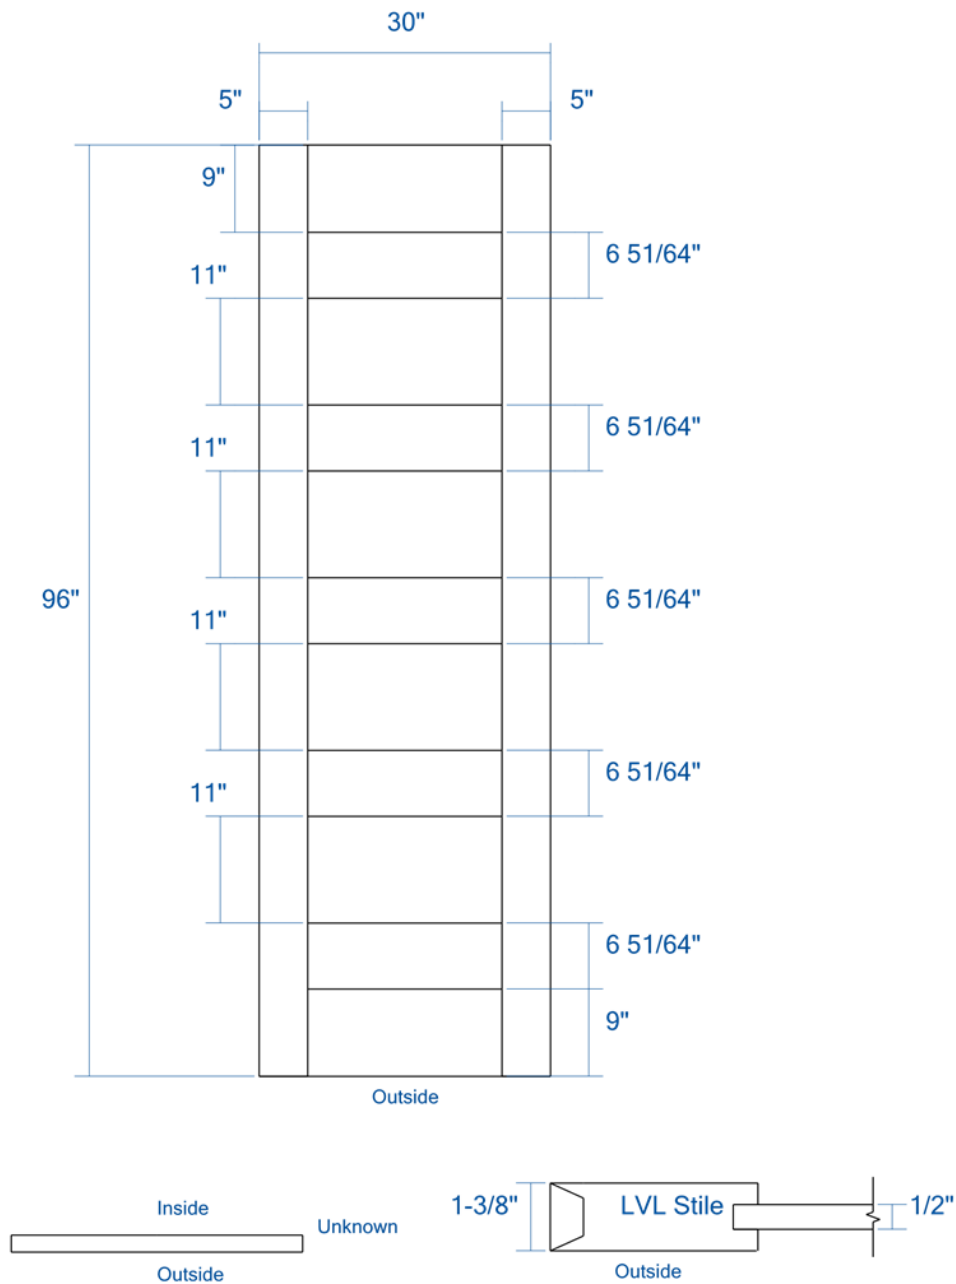

Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 13 - 22A - 2680 BYPASS		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 11/19/2021		

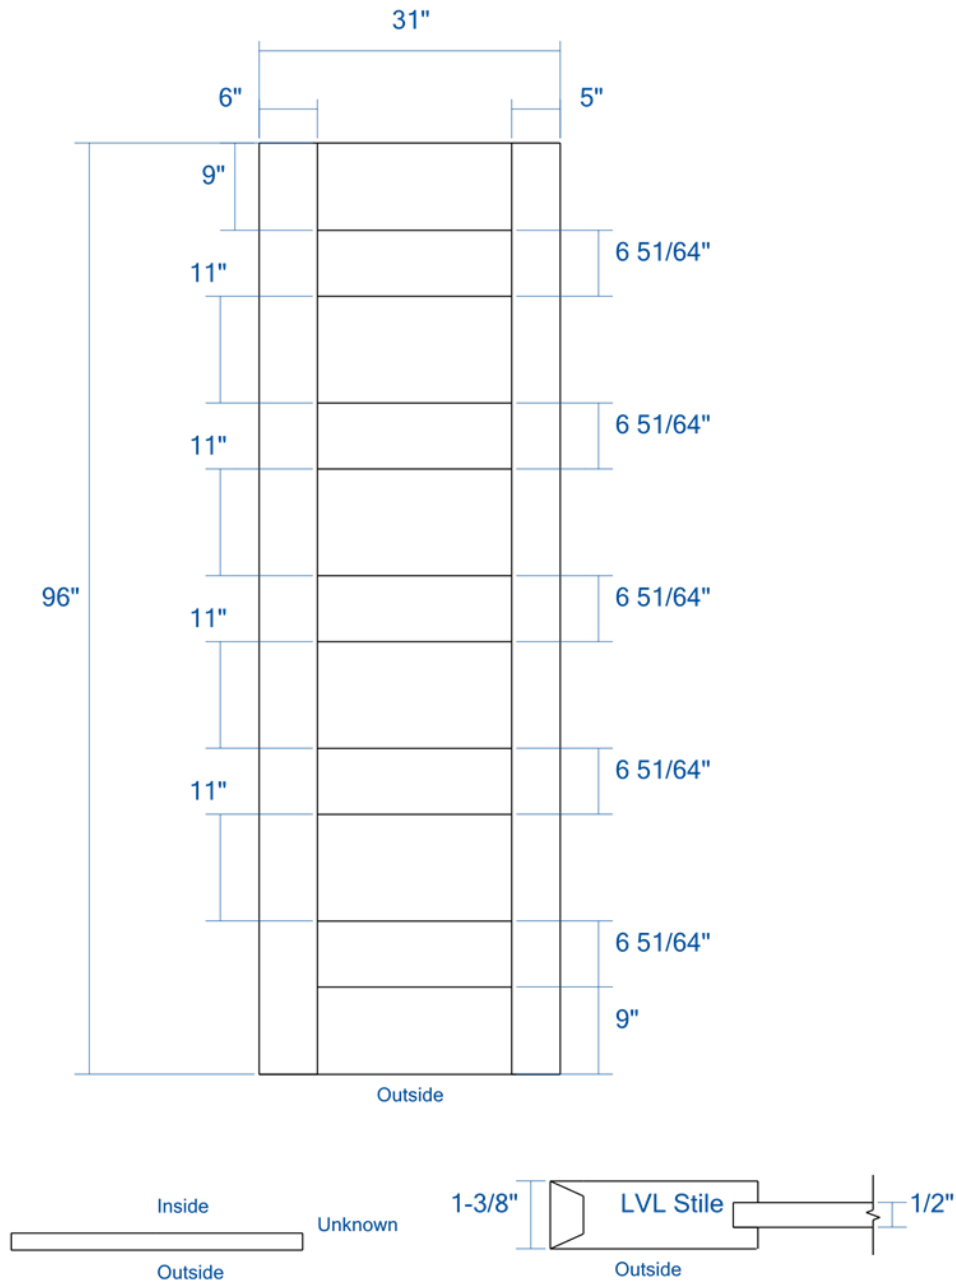


Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
MODIFIED TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 14 - 22B - 2680 BYPASS		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 11/19/2021		




Jamb Stop: Applied (OG)


TM5100	SS	C	MDF	N/A	Non-Rated	Interior
--------	----	---	-----	-----	-----------	----------

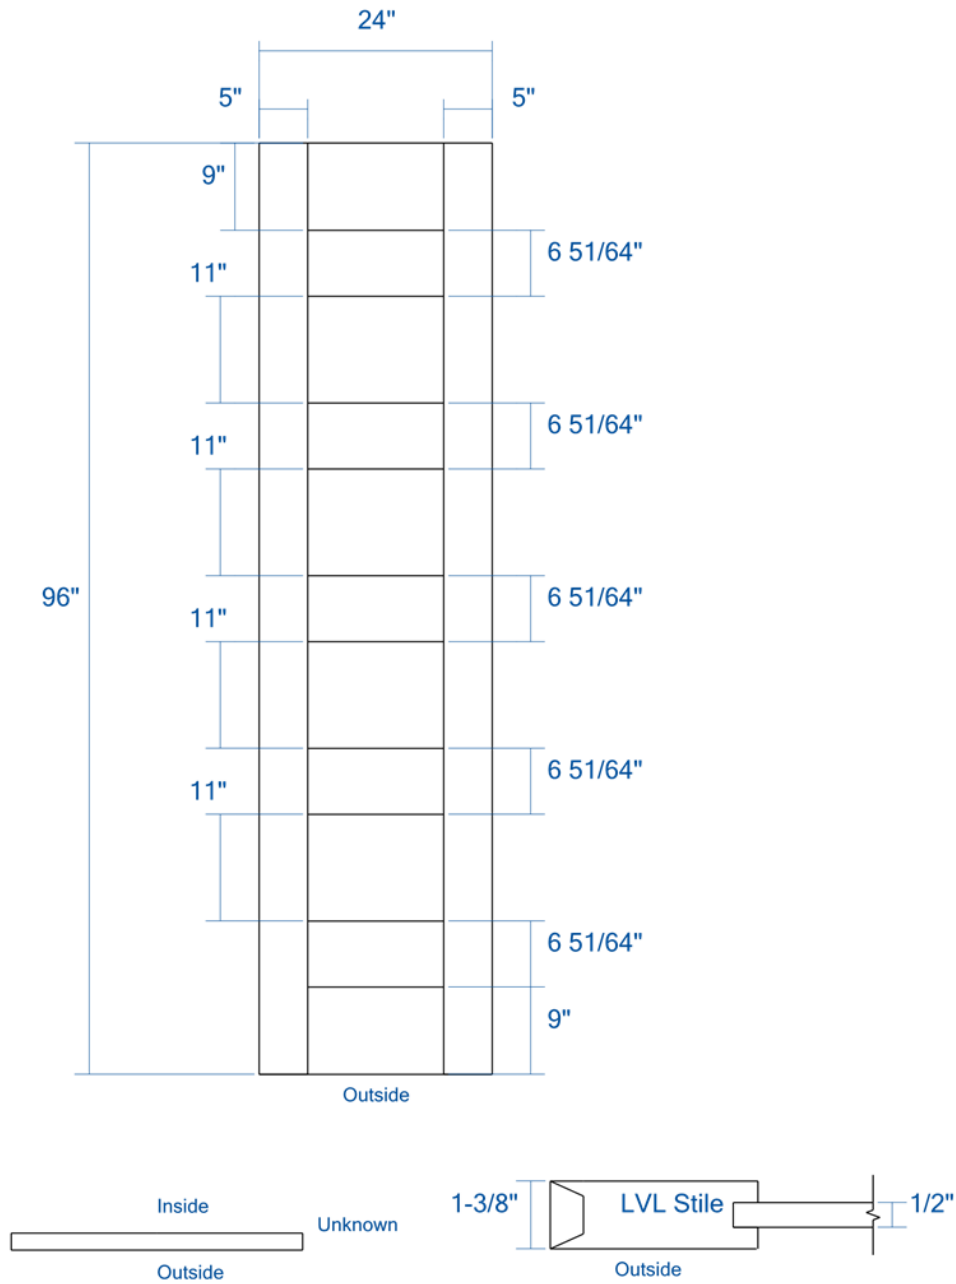


Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 16 - 24A - 2080 BYPASS		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 11/19/2021		

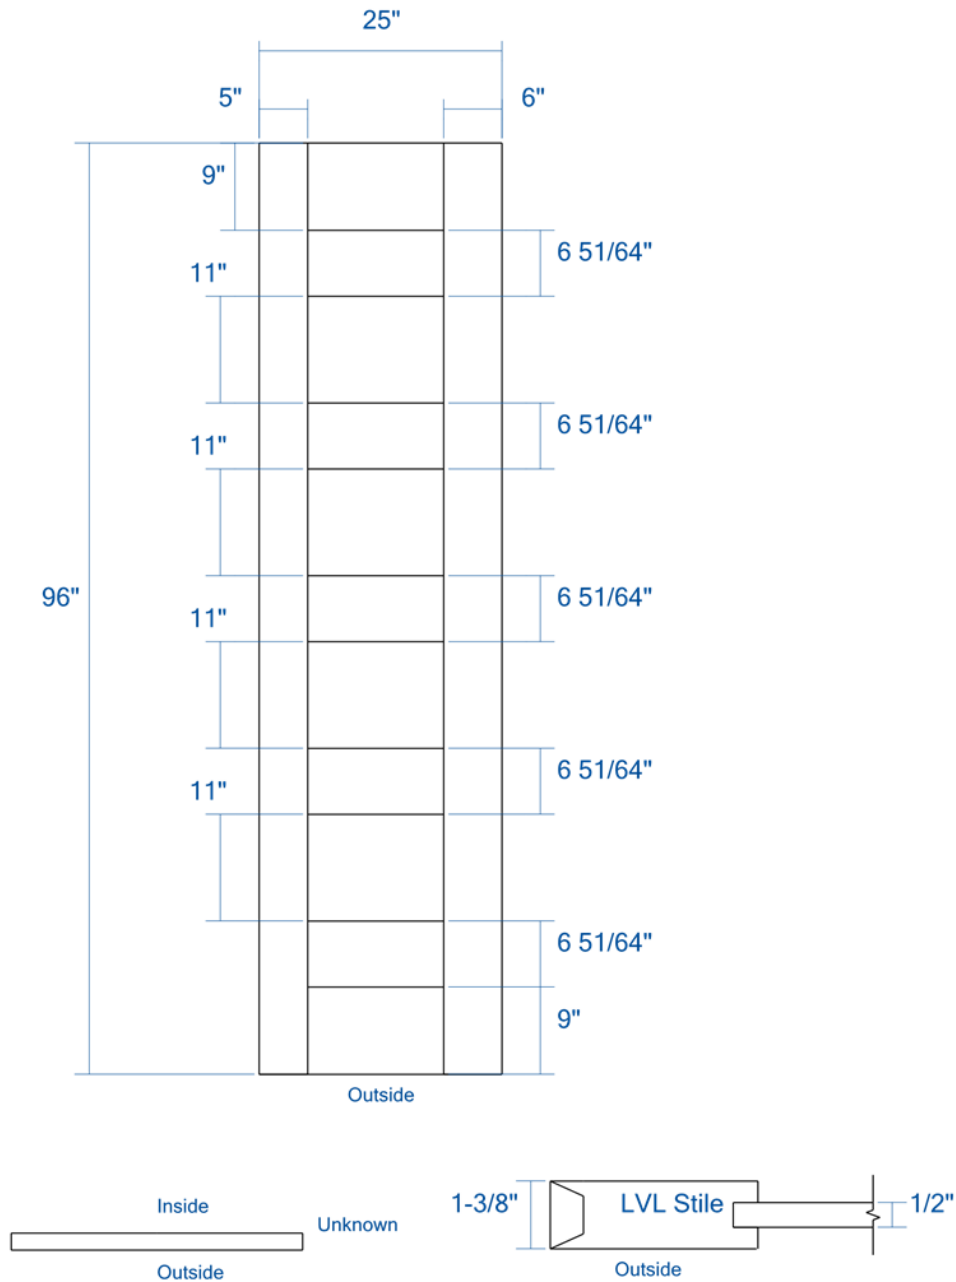

Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
MODIFIED TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 17 - 24B - 2080 BYPASS		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 11/19/2021		




Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 18 - 25 - 2880 LH		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 11/19/2021		




Jamb Stop: Applied (Square)

TM5100	SS	NA	MDF	1/4" White Lami	Non-Rated	Interior
--------	----	----	-----	-----------------	-----------	----------

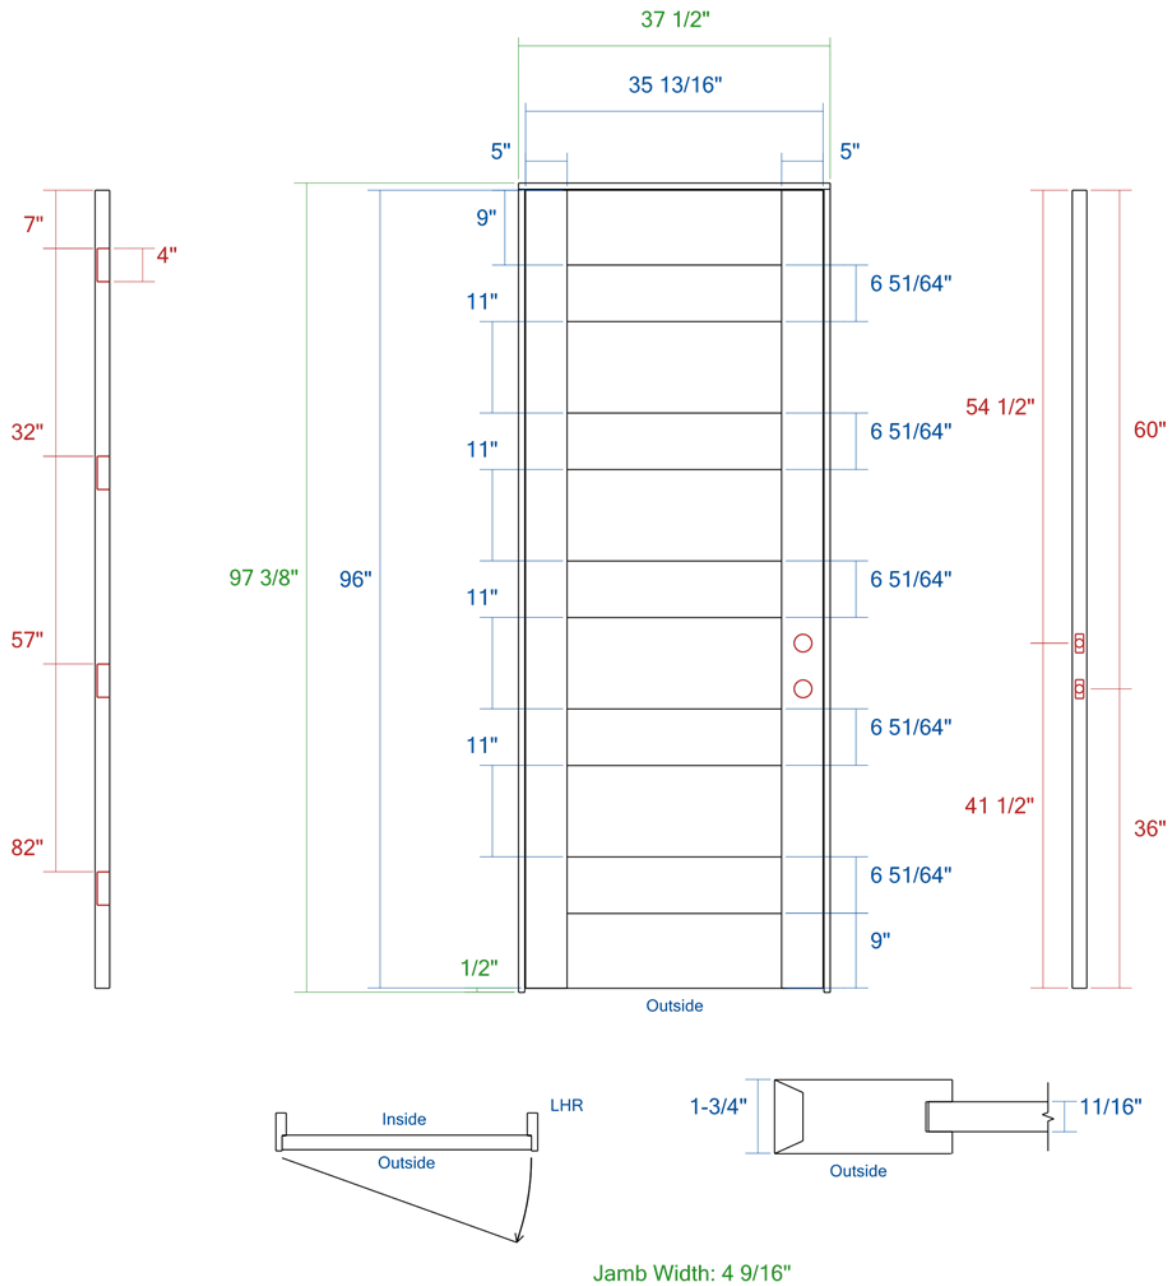

Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	20 Minute Neutral Pressure	Interior
Quote #: SQDRQ000332-1				Line #: 20 - 29 - GARAGE 1		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 11/19/2021		

Page 34 of 34