
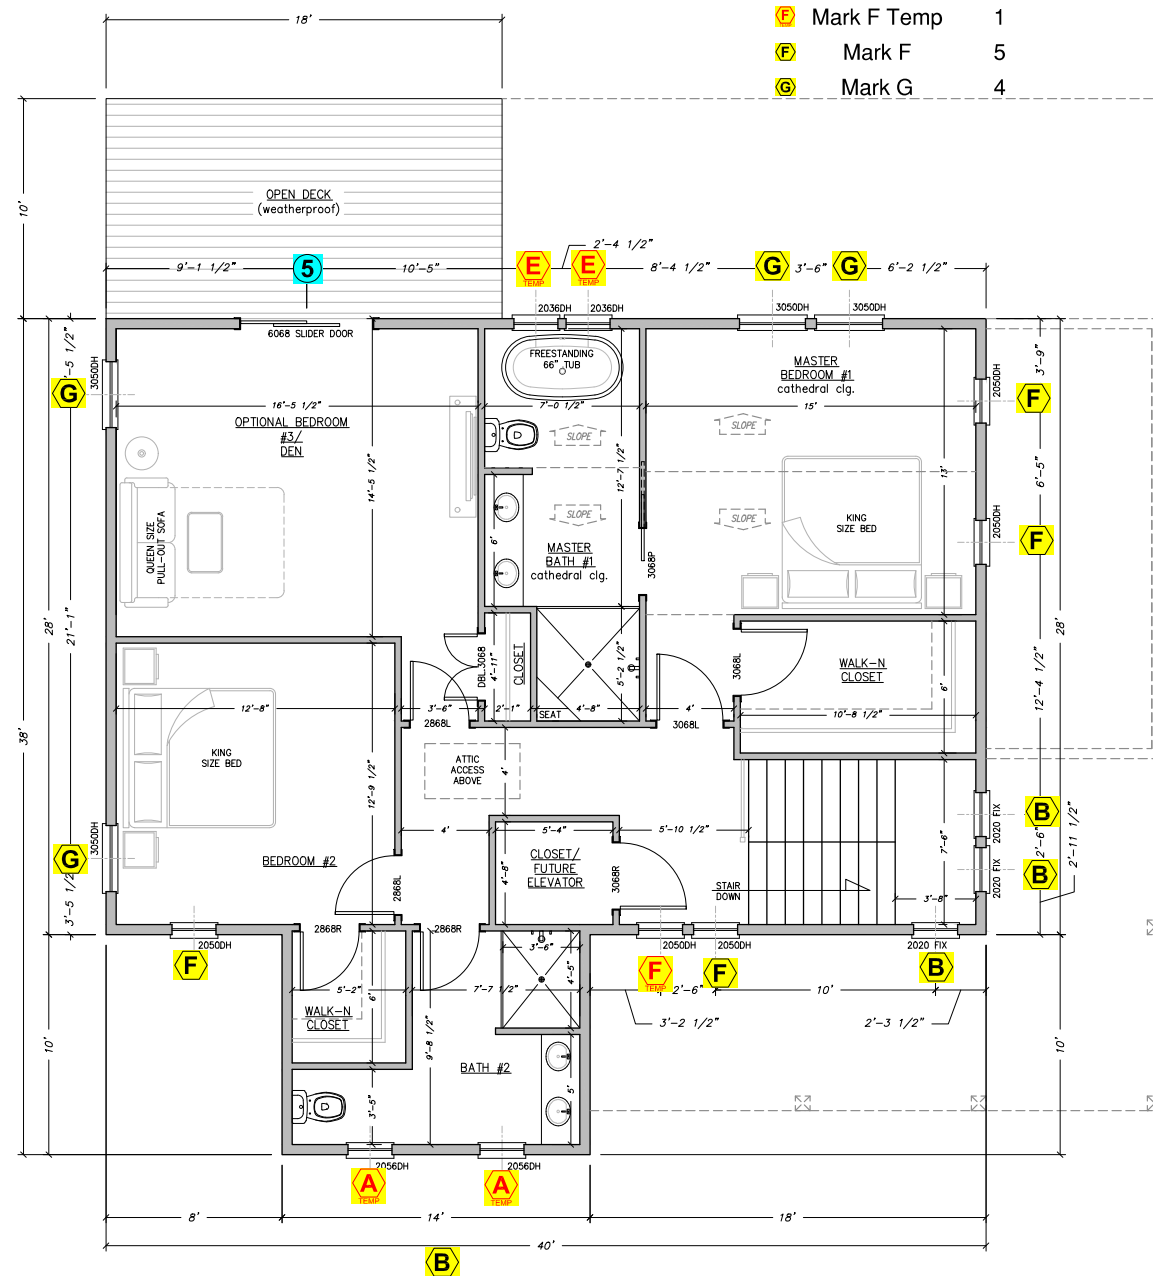


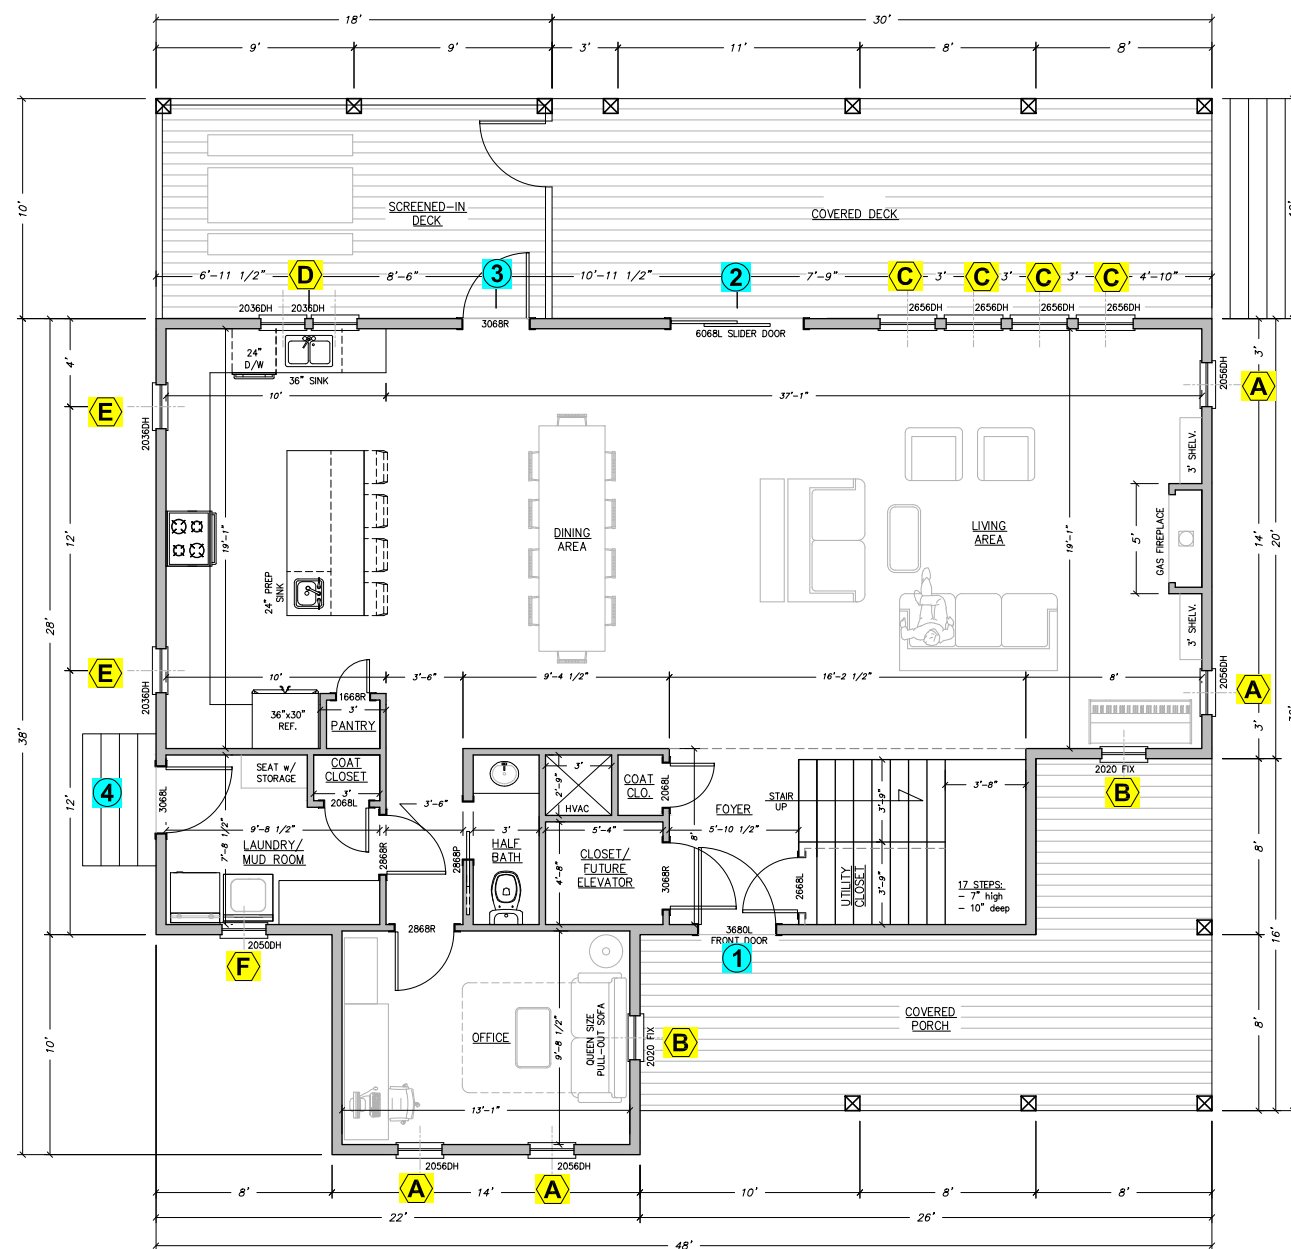


Window Schedule		
	Description	Quantity
A	Mark A-Temp	2
A	Mark A	4
B	Mark B	6
C	Mark C	4
D	Mark D	1
E	Mark E	2
E	Mark E Temp	2
F	Mark F Temp	1
F	Mark F	5
G	Mark G	4

Door Schedule:			
SIZE	QTY.	TYPE	NOTES
1668R	1	INTERIOR	
2068L	2	INTERIOR	
2868L	2	INTERIOR	
2868R	4	INTERIOR	
3068L	2	INTERIOR	
3068R	2	INTERIOR	
2868P	1	INTERIOR	POCKET DOOR
3068P	1	INTERIOR	POCKET DOOR
DBL-3068	1	INTERIOR	DOUBLE OUT-SWING DOOR
3068L	1	EXTERIOR	HALF LITE; SIDE ENTRY
3068R	1	EXTERIOR	FULL LITE; BACK PORCH
3680L	1	EXTERIOR	HALF LITE; MAIN ENTRY
6068SL	1	EXTERIOR	SLIDER DOOR; TOP DECK
6068SL	1	EXTERIOR	SLIDER DOOR; BACK DECK w/ 12" TRANSOM ABOVE

NOTE: 1. ALL EXTERIOR DOOR HEIGHTS TO BE INSTALLED AT 6'-8" UNLESS NOTED OTHERWISE.
2. ALL INTERIOR DOOR HEIGHTS TO BE INSTALLED AT 6'-8" UNLESS NOTED OTHERWISE.
3. ALL CLARIFICATIONS ARE TO BE DIRECTED TO THE CONTRACTOR/OWNER FOR SELECTION.

Window Schedule:					
MARK	QTY.	TYPE	ROUGH OPENING		NOTE
			WIDTH	HEIGHT	
2020FIX	5	FIXED	24"	24"	
2036DH	6	DBL. HUNG	24"	42"	
2050DH	6	DBL. HUNG	24"	60"	
2056DH	6	DBL. HUNG	24"	66"	
2656DH	4	DBL. HUNG	30"	66"	
3050DH	4	DBL. HUNG	36"	60"	


NOTE: 1. ALL WINDOWS TO BE INSTALLED WITH HEAD HEIGHT AT 6'-8", UNLESS NOTED OTHERWISE.
2. ALL CLARIFICATIONS ARE TO BE DIRECTED TO THE CONTRACTOR/OWNER FOR SELECTION.
3. CONTRACTOR IS RESPONSIBLE FOR VERIFYING ROUGH OPENING DIMENSIONS AND ACTUAL UNIT SIZES AND QUANTITIES.
4. ALL BEDROOMS TO HAVE MIN. 1 WINDOW OR DOOR MEETING NC EGRESS REQUIREMENTS. CONTRACTOR TO VERIFY.

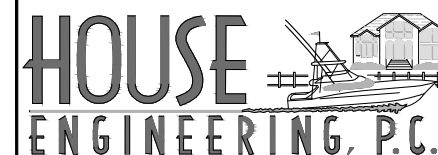

P.O. BOX 466
KITTY HAWK, NORTH CAROLINA 27949
OFFICE: (252) 261-8253
e-mail: rick@houseengineering.net

FLOOR PLAN
for:
Richard Dyer

Property Location:
**Lot 2T, Waverly Phase 1,
Church Neck, Northampton County, Virginia**



ENGINEER'S SEAL APPLIES ONLY TO STRUCTURAL COMPONENTS.		SUBMITTED	R. HOUSE	
PROJECT CONTACTS:		RECEIVED		
		APPLICABLE DRAWING TOLERANCES		
SIZE	PROJECT NUMBER		REV	SHEET
D	216490		-	2 OF 6
CAD FILENAME: 216490_Dyer		SCALE: 1/4" = 1'-0"		