



ESTIMATE

1/25/2022

Estimate

9898

Proposal Made To

Ship To

MICHAEL EVERETT
1087 LAWNES NEC DR
SMITHFIELD, VA 23430

EAP Rep	EAP Job #	Project
JB		DOORS

DESCRIPTION	QTY
INTERIOR DOORS (REVISED 1/25/22)	
TRUSTILE PRIMED MDF DOORS - DETAILS PER QUOTE SQDRQ000332-1 DATED 1/25/2022.	1.00
INSTALLATION NOT INCLUDED - BUT CAN BE QUOTED AS PART OF INTERIOR TRIM INSTALLATION QUOTATION.	

We appreciate your business !

Terms 50% DOWN/BALANCE ON DELIVERY

MAKE CHECKS PAYABLE TO: ERVIN ARCHITECTURAL PRODUCTS.

A 3% CONVENIENCE FEE WILL BE ADDED FOR ALL CREDIT CARD PAYMENTS

A finance charge of 1.5 % per month will be charged on all accounts past due.
Ervin Architectural Products shall be entitled to recovery all costs of collection including reasonable attorney fees. Quote valid for 30 days.

Subtotal	\$32,280.75
Sales Tax (6.0%)	\$1,936.85

TOTAL	\$34,217.60
--------------	--------------------

Approved by _____

Quotation

SQDRQ000332-1

Job Name: EVERETT RESIDENCE

Quote Date: 01/25/2022

Manufacturer's Estimated Lead Time: 13-14 Weeks

Account Manager: Jim Britt

Dealer

Ervin Architectural Products
1255 Carolina Rd
Suffolk, VA 23434

Customer

Line	Label	Qty	UOM	Description	Unit	Extended
1	11 - GYM	1	EA	29 13/16 inch X 96 inch (Per Leaf), 1 3/8, TM1000, Swing, Pair, TruStile Interior MDF Door, SS-Square Stick Sticking, Prehung, Bevel Meeting Stiles, Center Meet Pair Reverse, Prime, Wedge		
<p>Panel Substitution = Replace All Panels with Glass Glass = 1/4" Clear T-Astragal = No Astragal</p> <p>*****Door Machining Details***** Machine Prep = TruStile Standard Configuration Machine Prep = Hinges, Ball Catch</p> <p>Hinges = TruStile Installed Hinges = Standard Ball Bearing Hinges Hinges = Brand: TruStile Hinges = Qty: 4 per leaf - Size: 3-1/2" x 3-1/2" - Corners: Square Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4", Hinge 4: 82-1/4" Hinges = Thickness: 0.125" - Backset: 1/4" Hinges = Material: Plated Steel Hinges = Finish: US19-Flat Black</p> <p>Ball Catch = TruStile Installed Ball Catch = Standard Ball Catch Ball Catch = Prep on Top of Door Ball Catch = Brand: Hager, Model: 1447, Template: I-TA00064, Template Revision: 02 Ball Catch = US19-Flat Black Ball Catch = Backset: 2 3/4" From Edge of Door</p> <p>*****Pre-Hanging Details***** Jamb Fire Rating = Non-Rated Jamb Opening Type = Interior Jamb Profile = Flat Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed) Jamb Edge = Radius Jamb Thickness = 3/4 Jamb Width = 4 9/16 Jamb Stop Profile = Square Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed) Jamb Stop Width = 1 1/2" Jamb Stop Thickness = 3/8" Jamb Leg Extension = 7/8"</p> <p>*****Jamb Machining Details***** Jamb Head Prep = Ball Catch Strike: See Template Jamb Leg Prep = Hinge Prep: Standard Hinge</p>						
Line	Label	Qty	UOM	Description	Unit	Extended

2 11 - GYM 1 EA 59 11/16 inch X 36 inch, 1 3/8, TRG100, Transom, Single, TruStile Interior MDF, SS-Square Stick Sticking, Wrapped and Assembled, Prime, Wedge

Glass = 1/4" Clear
 Jamb Fire Rating = Non-Rated
 Jamb Opening Type = 4-Sided
 Wrapping Type = Center Aligned
 Jamb Profile = Flat
 Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)
 Jamb Edge = Radius
 Jamb Thickness = 3/4
 Jamb Width = 4 9/16
 Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)
 Outside Jamb Stop = Ogee - Shipped with Stop Applied
 Inside Jamb Stop = Ogee - Shipped with Stop Applied
 Jamb Stop Width = 1 1/2"
 Jamb Stop Thickness = 3/8"

Line	Label	Qty	UOM	Description	Unit	Extended
3	13 - GARAGE 2	1	EA	35 13/16 inch X 96 inch, 1 3/4, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prehung, Bevel Lock Side, LH, 20 Minute Neutral Pressure Fire Rating, Prime, Wedge		

Fire Label = Machined and Labeled

*****Door Machining Details*****

Machine Prep = TruStile Standard Configuration
 Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed
 Hinges = Standard Spring Hinges
 Hinges = Brand: TruStile
 Hinges = Qty: 4 - Size: 4" x 4" - Corners: Square
 Hinges = Locations: Hinge 1: 7", Hinge 2: 32", Hinge 3: 57", Hinge 4: 82"
 Hinges = Thickness: 0.130" - Backset: 1/4"
 Hinges = Material: Plated Steel
 Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware
 Lock Bore = Standard Single Bore
 Lock Bore = Location (ToD): 60" - Location (BoD): 36"
 Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"
 Radius Edge Prep -

*****Pre-Hanging Details*****

Jamb Fire Rating = 20 Minute
 Jamb Opening Type = House to Garage
 Jamb Profile = Single Rabbet
 Jamb Material = Poplar (Paint-Grade) (Primed)
 Jamb Edge = Radius
 Jamb Thickness = 3/4
 Jamb Width = 4 9/16
 Kerf for Weatherstripping = Yes
 Weatherstripping = Bronze
 Sill & Sweep = Composite Adjustable Sill (Bronze Finish) with Sweep
 Jamb Leg Extension = 1 5/8"

*****Jamb Machining Details*****

Jamb Leg Prep = Hinge Prep: Standard Hinge
 Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
4	14 - 2680 RH	3	EA	29 13/16 inch X 96 inch, 1 3/8, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prehung, Bevel Lock Side, RH, Prime, Wedge		

*****Door Machining Details*****

Machine Prep = TruStile Standard Configuration

Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed

Hinges = Standard Ball Bearing Hinges

Hinges = Brand: TruStile

Hinges = Qty: 4 - Size: 3-1/2" x 3-1/2" - Corners: Square

Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",
Hinge 4: 82-1/4"

Hinges = Thickness: 0.125" - Backset: 1/4"

Hinges = Material: Plated Steel

Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware

Lock Bore = Standard Single Bore

Lock Bore = Location (ToD): 60" - Location (BoD): 36"

Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"

Radius Edge Prep -

*****Pre-Hanging Details*****

Jamb Fire Rating = Non-Rated

Jamb Opening Type = Interior

Jamb Profile = Flat

Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)

Jamb Edge = Radius

Jamb Thickness = 3/4

Jamb Width = 4 9/16

Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)

Jamb Stop Profile = Ogee

Jamb Stop Width = 1 1/2"

Jamb Stop Thickness = 3/8"

Jamb Leg Extension = 7/8"

*****Jamb Machining Details*****

Jamb Leg Prep = Hinge Prep: Standard Hinge

Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
5	14 - PANTRY	1	EA	29 13/16 inch X 96 inch, 1 3/8, TM1000, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, Prehung, Bevel Lock Side, RH, Prime, Wedge		

Panel Substitution = Replace All Panels with Glass
Glass = 1/4" White Lami

*****Door Machining Details*****

Machine Prep = TruStile Standard Configuration
Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed
Hinges = Standard Ball Bearing Hinges
Hinges = Brand: TruStile
Hinges = Qty: 4 - Size: 3-1/2" x 3-1/2" - Corners: Square
Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",
Hinge 4: 82-1/4"
Hinges = Thickness: 0.125" - Backset: 1/4"
Hinges = Material: Plated Steel
Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware
Lock Bore = Standard Single Bore
Lock Bore = Location (ToD): 60" - Location (BoD): 36"
Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"
Radius Edge Prep -

*****Pre-Hanging Details*****

Jamb Fire Rating = Non-Rated
Jamb Opening Type = Interior
Jamb Profile = Flat
Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Edge = Radius
Jamb Thickness = 3/4
Jamb Width = 4 9/16
Jamb Stop Profile = Ogee
Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Stop Width = 1 1/2"
Jamb Stop Thickness = 3/8"
Jamb Leg Extension = 7/8"

*****Jamb Machining Details*****

Jamb Leg Prep = Hinge Prep: Standard Hinge
Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
6	15 - 2680 POCKET	5	EA	MODIFIED, 31 inch X 96 inch, 1 3/8, TM5100, Pocket, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, RH, Prime, Wedge		

LVL Stiles = Yes

*****Door Machining Details*****

Machine Prep = TruStile Modified Configuration
Machine Prep = Pocket Lock, Flush Pull

Pocket Lock = Prep For Hardware
Pocket Lock = Modified Mortise Pocket Lock
Pocket Lock = Brand: Emtek, Series: 2110 (Modern), Model: Machine
For Pulls, Template: IN4-MRPCKTMRTS (Rev: 1)
Pocket Lock = Location (ToD): 60" - Location (BoD): 36"
Pocket Lock = Backset: 2-3/16"

Flush Pull = Prep For Hardware
Flush Pull = Modified Flush Pull
Flush Pull = Brand: Emtek, Series: 2110, Model: 2110, Template: IN4-
MRPCKTMRTS, Template Revision: 1
Flush Pull = Prep Location(s): Left Stile: Both
Flush Pull = Backset: 2 3/16"

Line	Label	Qty	UOM	Description	Unit	Extended
7	16 - 4080 PRIV LAMI	2	EA	23 13/16 inch X 96 inch (Per Leaf), 1 3/8, TM5100, Swing, Pair, TruStile Interior MDF Door, SS-Square Stick Sticking, Prehung, Bevel Lock Side of Active Door, RH Active in Pair, Prime, Wedge		

Panel Substitution = Replace All Panels with Glass
Glass = 1/4" White Lami
T-Astragal = Traditional T-Astragal

*****Door Machining Details*****

Machine Prep = TruStile Standard Configuration
Machine Prep = Hinges, Lock Bore, Flushbolt

Hinges = TruStile Installed
Hinges = Standard Ball Bearing Hinges
Hinges = Brand: TruStile
Hinges = Qty: 4 per leaf - Size: 3-1/2" x 3-1/2" - Corners: Square
Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",
Hinge 4: 82-1/4"
Hinges = Thickness: 0.125" - Backset: 1/4"
Hinges = Material: Plated Steel
Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware
Lock Bore = Standard Single Bore
Lock Bore = Location (ToD): 60" - Location (BoD): 36"
Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"
Radius Edge Prep -

Top Flushbolt = TruStile Installed
Top Flushbolt = Standard Flushbolt
Top Flushbolt = Extension: 18"
Top Flushbolt = Brand: Hager, Model: 282, Template: T-TA00177
Top Flushbolt = Flushbolt Finish: US19-Flat Black

Astragal/Door Edge Strike (Inactive Leaf) = Lock Bore Strike
Astragal/Door Edge Strike (Inactive Leaf) = 2-1/4" Radius Lip Strike

*****Pre-Hanging Details*****

Jamb Fire Rating = Non-Rated
Jamb Opening Type = Interior
Jamb Profile = Flat
Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Edge = Radius
Jamb Thickness = 3/4
Jamb Width = 4 9/16
Jamb Stop Profile = Ogee
Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Stop Width = 1 1/2"
Jamb Stop Thickness = 3/8"
Jamb Leg Extension = 7/8"

*****Jamb Machining Details*****

Jamb Head Prep = Flushbolt Head Strike: See Template
Jamb Leg Prep = Hinge Prep: Standard Hinge

Line	Label	Qty	UOM	Description	Unit	Extended
8	17 - 2680 DBL POCKET	2	EA	MODIFIED, 31 inch X 96 inch, 1 3/8, TM5100, Pocket, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, LH, Prime, Wedge		

LVL Stiles = Yes

*****Door Machining Details*****

Machine Prep = TruStile Modified Configuration
Machine Prep = Pocket Lock, Flush Pull

Pocket Lock = Prep For Hardware
Pocket Lock = Modified Mortise Pocket Lock
Pocket Lock = Brand: Emtek, Series: 2110 (Modern), Model: Machine
For Pulls, Template: IN4-MRPCKTMRTS (Rev: 1)
Pocket Lock = Location (ToD): 60" - Location (BoD): 36"
Pocket Lock = Backset: 2-3/16"

Flush Pull = Prep For Hardware
Flush Pull = Modified Flush Pull
Flush Pull = Brand: Emtek, Series: 2110, Model: 2110, Template: IN4-
MRPCKTMRTS, Template Revision: 1
Flush Pull = Prep Location(s): Right Stile:Both
Flush Pull = Backset: 2 3/16"

Line	Label	Qty	UOM	Description	Unit	Extended
9	18 - 2880 POCKET	1	EA	MODIFIED, 33 inch X 96 inch, 1 3/8, TM5100, Pocket, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, RH, Prime, Wedge		

LVL Stiles = Yes

*****Door Machining Details*****

Machine Prep = TruStile Modified Configuration

Machine Prep = Pocket Lock, Flush Pull

Pocket Lock = Prep For Hardware

Pocket Lock = Modified Mortise Pocket Lock

Pocket Lock = Brand: Emtek, Series: 2110 (Modern), Model: Machine

For Pulls, Template: IN4-MRPCKTMRTS (Rev: 1)

Pocket Lock = Location (ToD): 60" - Location (BoD): 36"

Pocket Lock = Backset: 2-3/16"

Flush Pull = Prep For Hardware

Flush Pull = Modified Flush Pull

Flush Pull = Brand: Emtek, Series: 2110, Model: 2110, Template: IN4-

MRPCKTMRTS, Template Revision: 1

Flush Pull = Prep Location(s): Left Stile: Both

Flush Pull = Backset: 2 3/16"

Line	Label	Qty	UOM	Description	Unit	Extended
10	19 - 2080 RH	1	EA	23 13/16 inch X 96 inch, 1 3/8, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prehung, Bevel Lock Side, RH, Prime, Wedge		

*****Door Machining Details*****

Machine Prep = TruStile Standard Configuration

Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed

Hinges = Standard Ball Bearing Hinges

Hinges = Brand: TruStile

Hinges = Qty: 4 - Size: 3-1/2" x 3-1/2" - Corners: Square

Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",

Hinge 4: 82-1/4"

Hinges = Thickness: 0.125" - Backset: 1/4"

Hinges = Material: Plated Steel

Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware

Lock Bore = Standard Single Bore

Lock Bore = Location (ToD): 60" - Location (BoD): 36"

Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"

Radius Edge Prep -

*****Pre-Hanging Details*****

Jamb Fire Rating = Non-Rated

Jamb Opening Type = Interior

Jamb Profile = Flat

Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)

Jamb Edge = Radius

Jamb Thickness = 3/4

Jamb Width = 4 9/16

Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)

Jamb Stop Profile = Square

Jamb Stop Width = 1 1/2"

Jamb Stop Thickness = 3/8"

Jamb Leg Extension = 7/8"

*****Jamb Machining Details*****

Jamb Leg Prep = Hinge Prep: Standard Hinge

Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
11	20- 2880 RH LAMI	2	EA	31 13/16 inch X 96 inch, 1 3/8, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, Prehung, Bevel Lock Side, RH, Prime, Wedge		

Panel Substitution = Replace All Panels with Glass
Glass = 1/4" White Lami

*****Door Machining Details*****

Machine Prep = TruStile Standard Configuration
Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed
Hinges = Standard Ball Bearing Hinges
Hinges = Brand: TruStile
Hinges = Qty: 4 - Size: 3-1/2" x 3-1/2" - Corners: Square
Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",
Hinge 4: 82-1/4"
Hinges = Thickness: 0.125" - Backset: 1/4"
Hinges = Material: Plated Steel
Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware
Lock Bore = Standard Single Bore
Lock Bore = Location (ToD): 60" - Location (BoD): 36"
Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"
Radius Edge Prep -

*****Pre-Hanging Details*****

Jamb Fire Rating = Non-Rated
Jamb Opening Type = Interior
Jamb Profile = Flat
Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Edge = Radius
Jamb Thickness = 3/4
Jamb Width = 4 9/16
Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Stop Profile = Square
Jamb Stop Width = 1 1/2"
Jamb Stop Thickness = 3/8"
Jamb Leg Extension = 7/8"

*****Jamb Machining Details*****

Jamb Leg Prep = Hinge Prep: Standard Hinge
Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
12	21 - 2480 LH	1	EA	27 13/16 inch X 96 inch, 1 3/8, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prehung, Bevel Lock Side, LH, Prime, Wedge		

*****Door Machining Details*****

Machine Prep = TruStile Standard Configuration
Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed
Hinges = Standard Ball Bearing Hinges
Hinges = Brand: TruStile
Hinges = Qty: 4 - Size: 3-1/2" x 3-1/2" - Corners: Square
Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",
Hinge 4: 82-1/4"
Hinges = Thickness: 0.125" - Backset: 1/4"
Hinges = Material: Plated Steel
Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware
Lock Bore = Standard Single Bore
Lock Bore = Location (ToD): 60" - Location (BoD): 36"
Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"
Radius Edge Prep -

*****Pre-Hanging Details*****

Jamb Fire Rating = Non-Rated
Jamb Opening Type = Interior
Jamb Profile = Flat
Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Edge = Radius
Jamb Thickness = 3/4
Jamb Width = 4 9/16
Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Stop Profile = Ogee
Jamb Stop Width = 1 1/2"
Jamb Stop Thickness = 3/8"
Jamb Leg Extension = 7/8"

*****Jamb Machining Details*****

Jamb Leg Prep = Hinge Prep: Standard Hinge
Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
13	22A - 2680 BYPASS	1	EA	30 inch X 96 inch, 1 3/8, TM5100, Sliding, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Unknown Handing, Prime, Wedge		

LVL Stiles = Yes

Line	Label	Qty	UOM	Description	Unit	Extended
14	22B - 2680 BYPASS	1	EA	MODIFIED, 31 inch X 96 inch, 1 3/8, TM5100, Sliding, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Unknown Handing, Prime, Wedge		

LVL Stiles = Yes

Comments

THIS SLAB TO BE 1" WIDER FOR OVERLAP

Line	Label	Qty	UOM	Description	Unit	Extended
15	23 - 2680 LH	5	EA	29 13/16 inch X 96 inch, 1 3/8, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prehung, Bevel Lock Side, LH, Prime, Wedge		

*****Door Machining Details*****

Machine Prep = TruStile Standard Configuration
Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed
Hinges = Standard Ball Bearing Hinges
Hinges = Brand: TruStile
Hinges = Qty: 4 - Size: 3-1/2" x 3-1/2" - Corners: Square
Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",
Hinge 4: 82-1/4"
Hinges = Thickness: 0.125" - Backset: 1/4"
Hinges = Material: Plated Steel
Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware
Lock Bore = Standard Single Bore
Lock Bore = Location (ToD): 60" - Location (BoD): 36"
Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"
Radius Edge Prep -

*****Pre-Hanging Details*****

Jamb Fire Rating = Non-Rated
Jamb Opening Type = Interior
Jamb Profile = Flat
Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Edge = Radius
Jamb Thickness = 3/4
Jamb Width = 4 9/16
Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Stop Profile = Ogee
Jamb Stop Width = 1 1/2"
Jamb Stop Thickness = 3/8"
Jamb Leg Extension = 7/8"

*****Jamb Machining Details*****

Jamb Leg Prep = Hinge Prep: Standard Hinge
Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
16	24A - 2080 BYPASS	2	EA	24 inch X 96 inch, 1 3/8, TM5100, Sliding, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Unknown Handing, Prime, Wedge		

LVL Stiles = Yes

Line	Label	Qty	UOM	Description	Unit	Extended
17	24B - 2080 BYPASS	2	EA	MODIFIED, 25 inch X 96 inch, 1 3/8, TM5100, Sliding, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Unknown Handing, Prime, Wedge		

LVL Stiles = Yes

Comments

THIS SLAB TO BE 1" WIDER FOR OVERLAP

Line	Label	Qty	UOM	Description	Unit	Extended
18	25 - 2880 LH	3	EA	31 13/16 inch X 96 inch, 1 3/8, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prehung, Bevel Lock Side, LH, Prime, Wedge		

*****Door Machining Details*****

Machine Prep = TruStile Standard Configuration

Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed

Hinges = Standard Ball Bearing Hinges

Hinges = Brand: TruStile

Hinges = Qty: 4 - Size: 3-1/2" x 3-1/2" - Corners: Square

Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",
Hinge 4: 82-1/4"

Hinges = Thickness: 0.125" - Backset: 1/4"

Hinges = Material: Plated Steel

Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware

Lock Bore = Standard Single Bore

Lock Bore = Location (ToD): 60" - Location (BoD): 36"

Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"

Radius Edge Prep -

*****Pre-Hanging Details*****

Jamb Fire Rating = Non-Rated

Jamb Opening Type = Interior

Jamb Profile = Flat

Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)

Jamb Edge = Radius

Jamb Thickness = 3/4

Jamb Width = 4 9/16

Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)

Jamb Stop Profile = Ogee

Jamb Stop Width = 1 1/2"

Jamb Stop Thickness = 3/8"

Jamb Leg Extension = 7/8"

*****Jamb Machining Details*****

Jamb Leg Prep = Hinge Prep: Standard Hinge

Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
19	28- 2680 LH LAMI	1	EA	29 13/16 inch X 96 inch, 1 3/8, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, Prehung, Bevel Lock Side, LH, Prime, Wedge		

Panel Substitution = Replace All Panels with Glass
Glass = 1/4" White Lami

*****Door Machining Details*****

Machine Prep = TruStile Standard Configuration
Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed
Hinges = Standard Ball Bearing Hinges
Hinges = Brand: TruStile
Hinges = Qty: 4 - Size: 3-1/2" x 3-1/2" - Corners: Square
Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4",
Hinge 4: 82-1/4"
Hinges = Thickness: 0.125" - Backset: 1/4"
Hinges = Material: Plated Steel
Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware
Lock Bore = Standard Single Bore
Lock Bore = Location (ToD): 60" - Location (BoD): 36"
Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"
Radius Edge Prep -

*****Pre-Hanging Details*****

Jamb Fire Rating = Non-Rated
Jamb Opening Type = Interior
Jamb Profile = Flat
Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Edge = Radius
Jamb Thickness = 3/4
Jamb Width = 4 9/16
Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)
Jamb Stop Profile = Square
Jamb Stop Width = 1 1/2"
Jamb Stop Thickness = 3/8"
Jamb Leg Extension = 7/8"

*****Jamb Machining Details*****

Jamb Leg Prep = Hinge Prep: Standard Hinge
Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
20	29 - GARAGE 1	1	EA	35 13/16 inch X 96 inch, 1 3/4, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prehung, Bevel Lock Side, LH, 20 Minute Neutral Pressure Fire Rating, Prime, Wedge		

Fire Label = Machined and Labeled

*****Door Machining Details*****

Machine Prep = TruStile Standard Configuration

Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed

Hinges = Standard Spring Hinges

Hinges = Brand: TruStile

Hinges = Qty: 4 - Size: 4" x 4" - Corners: Square

Hinges = Locations: Hinge 1: 7", Hinge 2: 32", Hinge 3: 57", Hinge 4: 82"

Hinges = Thickness: 0.130" - Backset: 1/4"

Hinges = Material: Plated Steel

Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware

Lock Bore = Standard Single Bore

Lock Bore = Location (ToD): 60" - Location (BoD): 36"

Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"

Radius Edge Prep -

*****Pre-Hanging Details*****

Jamb Fire Rating = 20 Minute

Jamb Opening Type = House to Garage

Jamb Profile = Single Rabbet

Jamb Material = Poplar (Paint-Grade) (Primed)

Jamb Edge = Radius

Jamb Thickness = 3/4

Jamb Width = 4 9/16

Kerf for Weatherstripping = Yes

Weatherstripping = Bronze

Sill & Sweep = Composite Adjustable Sill (Bronze Finish) with

Sweep

Jamb Leg Extension = 1 5/8"

*****Jamb Machining Details*****

Jamb Leg Prep = Hinge Prep: Standard Hinge

Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike

Line	Label	Qty	UOM	Description	Unit	Extended
21	30 - 2480 LH 6	1	EA	27 13/16 inch X 96 inch, 1 3/8, TM5100, Swing, Single, TruStile Interior MDF Door, SS-Square Stick Sticking, C-Flat Panel, Prehung, Bevel Lock Side, LH, Prime, Wedge		

*****Door Machining Details*****

Machine Prep = TruStile Standard Configuration

Machine Prep = Hinges, Lock Bore

Hinges = TruStile Installed

Hinges = Standard Ball Bearing Hinges

Hinges = Brand: TruStile

Hinges = Qty: 4 - Size: 3-1/2" x 3-1/2" - Corners: Square

Hinges = Locations: Hinge 1: 7-1/4", Hinge 2: 32-1/4", Hinge 3: 57-1/4", Hinge 4: 82-1/4"

Hinges = Thickness: 0.125" - Backset: 1/4"

Hinges = Material: Plated Steel

Hinges = Finish: US19-Flat Black

Lock Bore = Prep For Hardware

Lock Bore = Standard Single Bore

Lock Bore = Location (ToD): 60" - Location (BoD): 36"

Lock Bore = 2-1/8" Diameter - 2-3/8" On Center Backset - 1" x 2-1/4"

Radius Edge Prep -

*****Pre-Hanging Details*****

Jamb Fire Rating = Non-Rated

Jamb Opening Type = Interior

Jamb Profile = Flat

Jamb Material = Finger Joint Poplar (Paint-Grade) (Primed)

Jamb Edge = Radius

Jamb Thickness = 3/4

Jamb Width = 4 9/16

Jamb Stop Profile = Ogee

Jamb Stop Material = Finger Joint Poplar (Paint-Grade) (Primed)

Jamb Stop Width = 1 1/2"

Jamb Stop Thickness = 3/8"



Jamb Leg Extension = 7/8"

*****Jamb Machining Details*****


Jamb Leg Prep = Hinge Prep: Standard Hinge

Jamb Leg Prep = Lock Bore Strike: 2-1/4" Radius Lip Strike


Line	Label	Qty	UOM	Description	Unit	Extended
22		1	EA	Manufacturer's Freight for 41 Doors		
Total Units:		38				

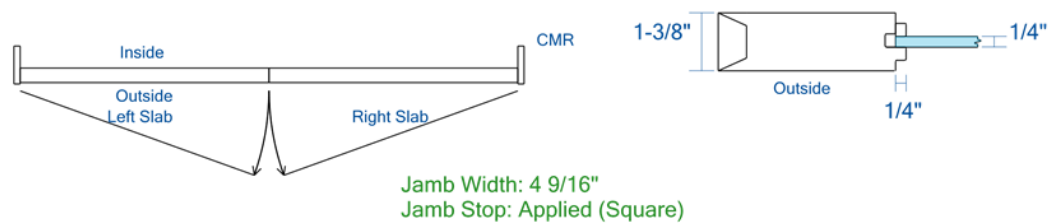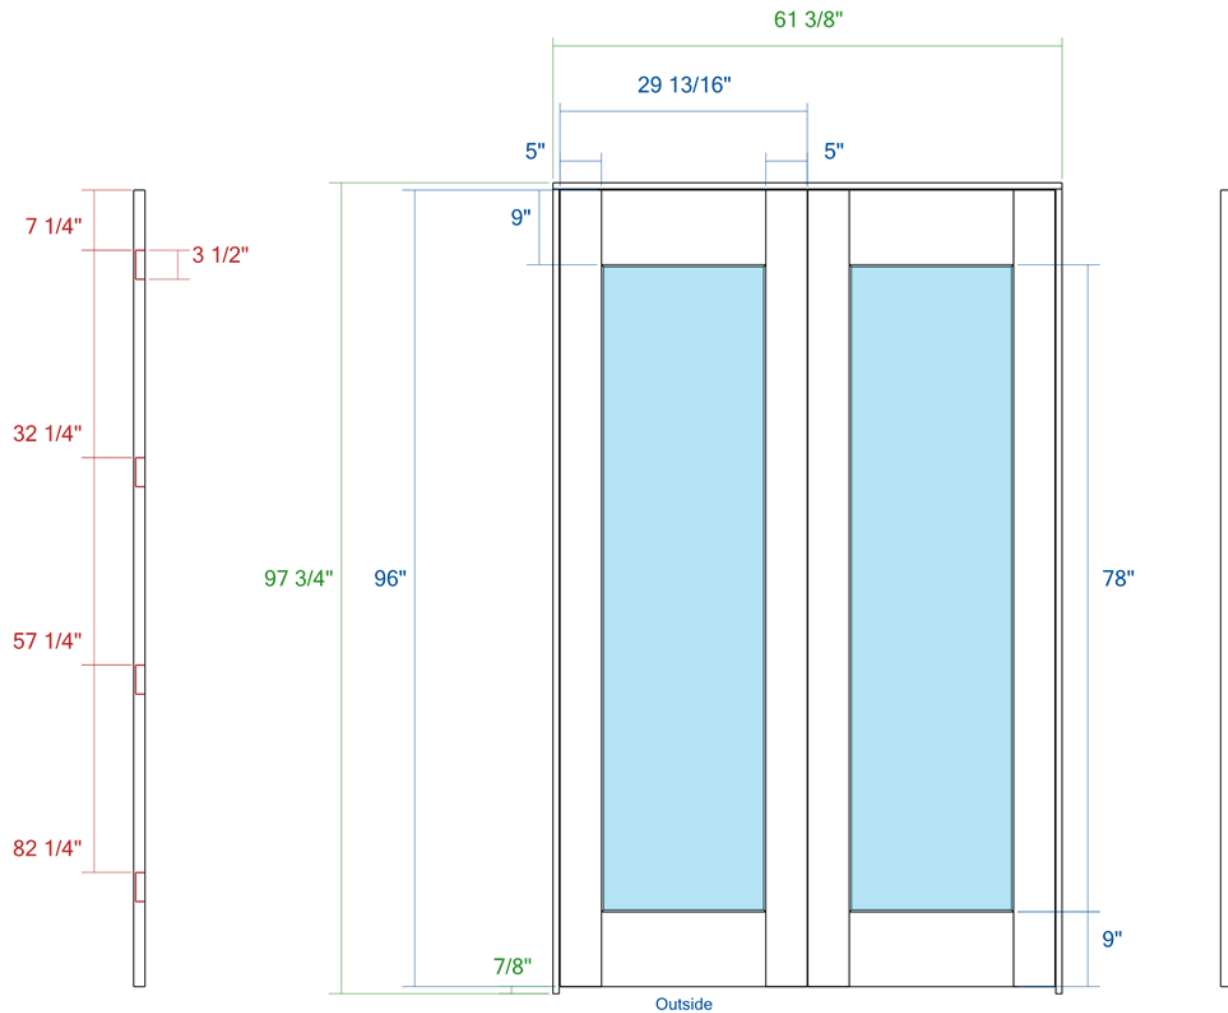



Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM1000	SS	NA	MDF	1/4" Clear	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 1 - 11 - GYM		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 01/25/2022		

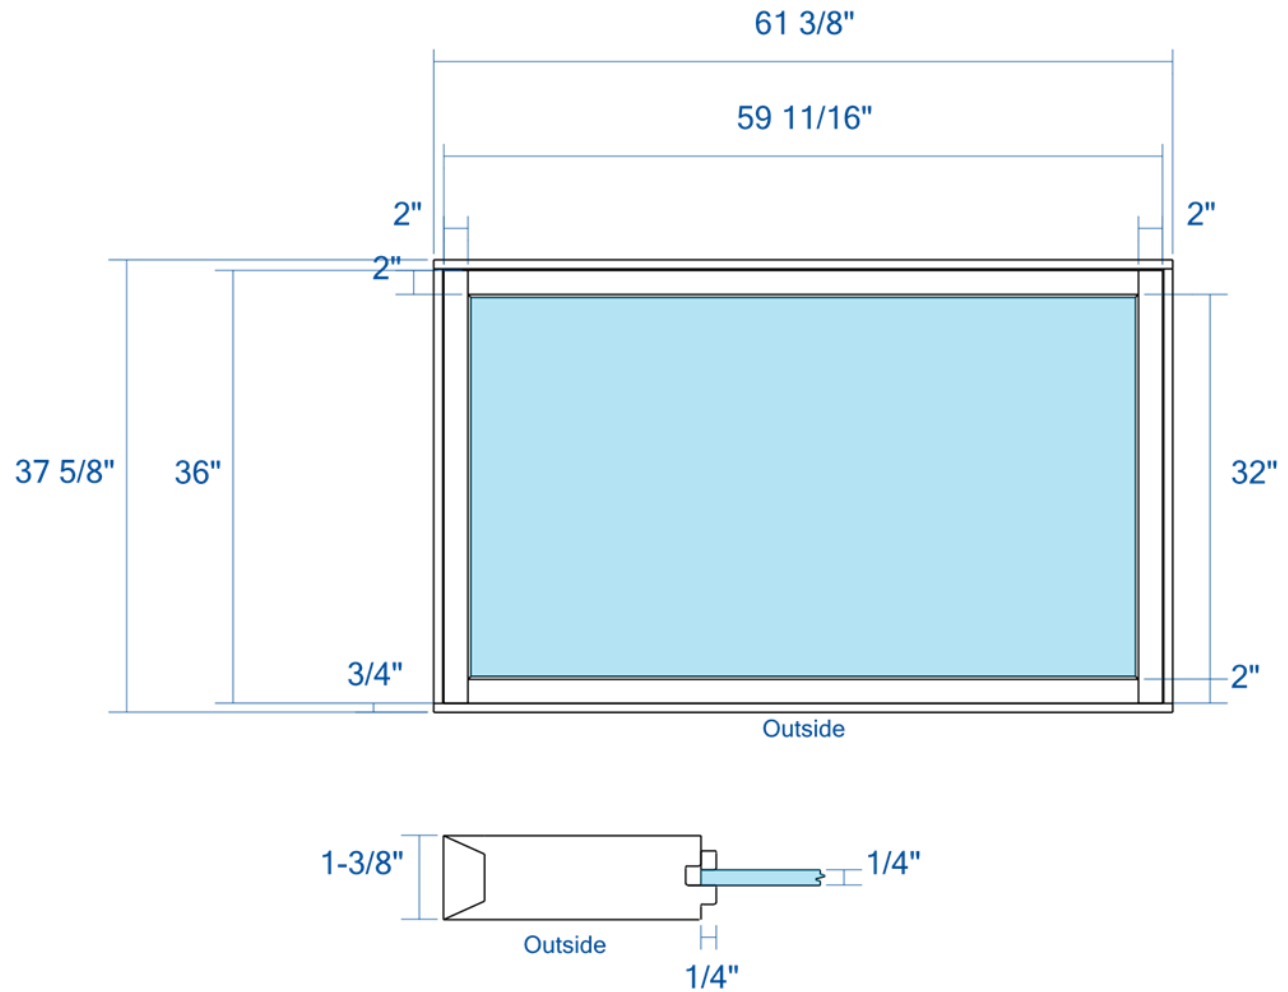

Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TRG100	SS	NA	MDF	1/4" Clear	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 2 - 11 - GYM TSM		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 01/25/2022		

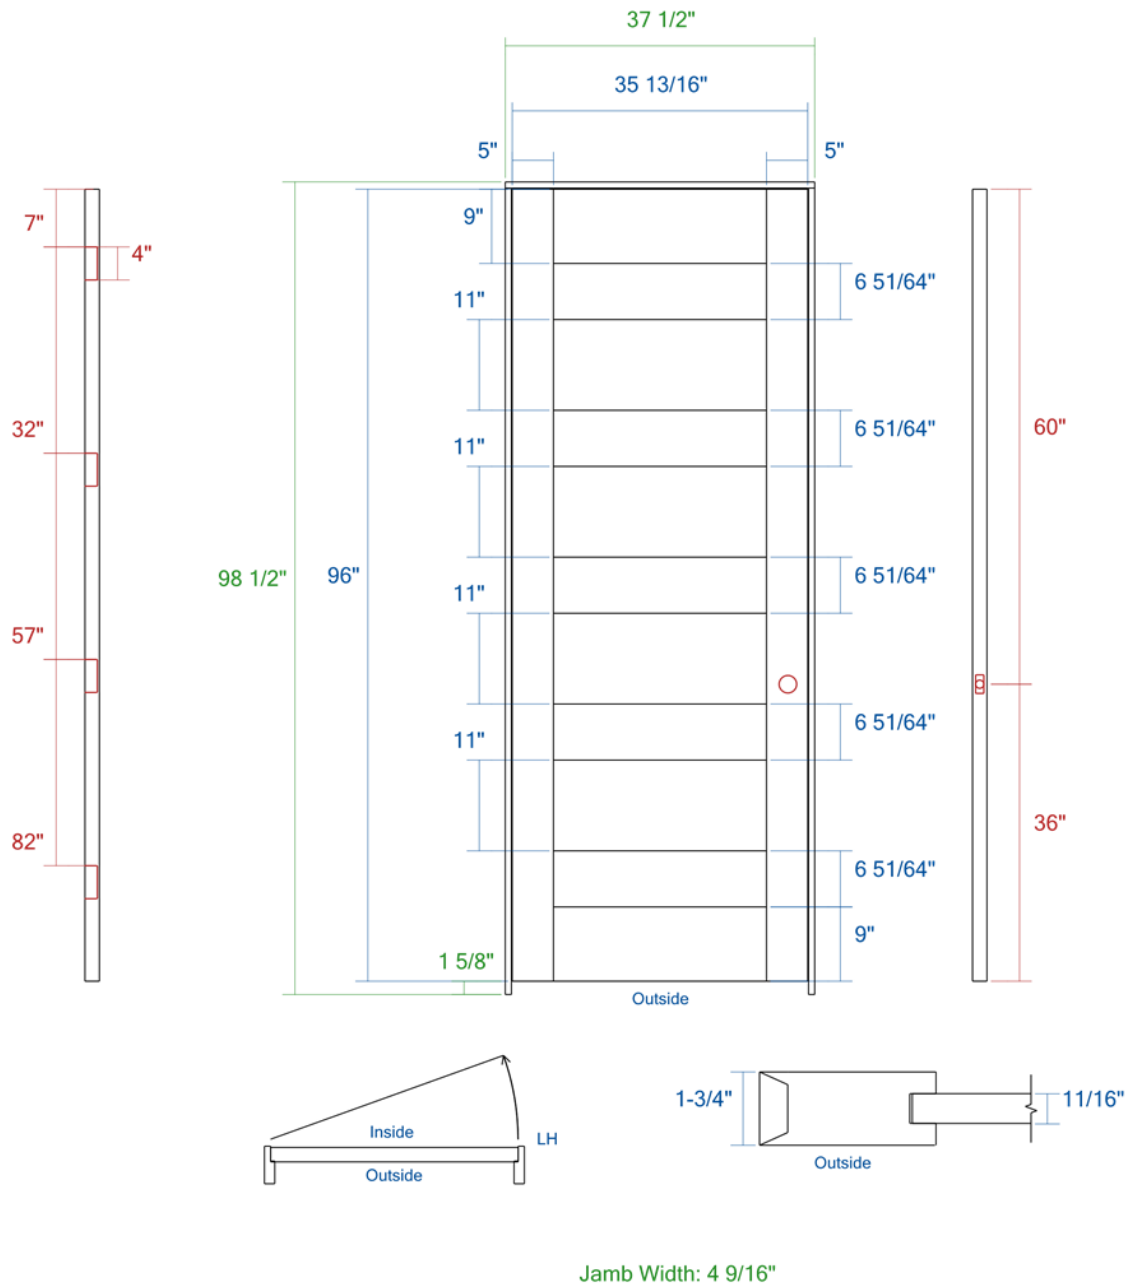


Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	20 Minute Neutral Pressure	Interior
Quote #: SQDRQ000332-1				Line #: 3 - 13 - GARAGE 2		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 01/25/2022		

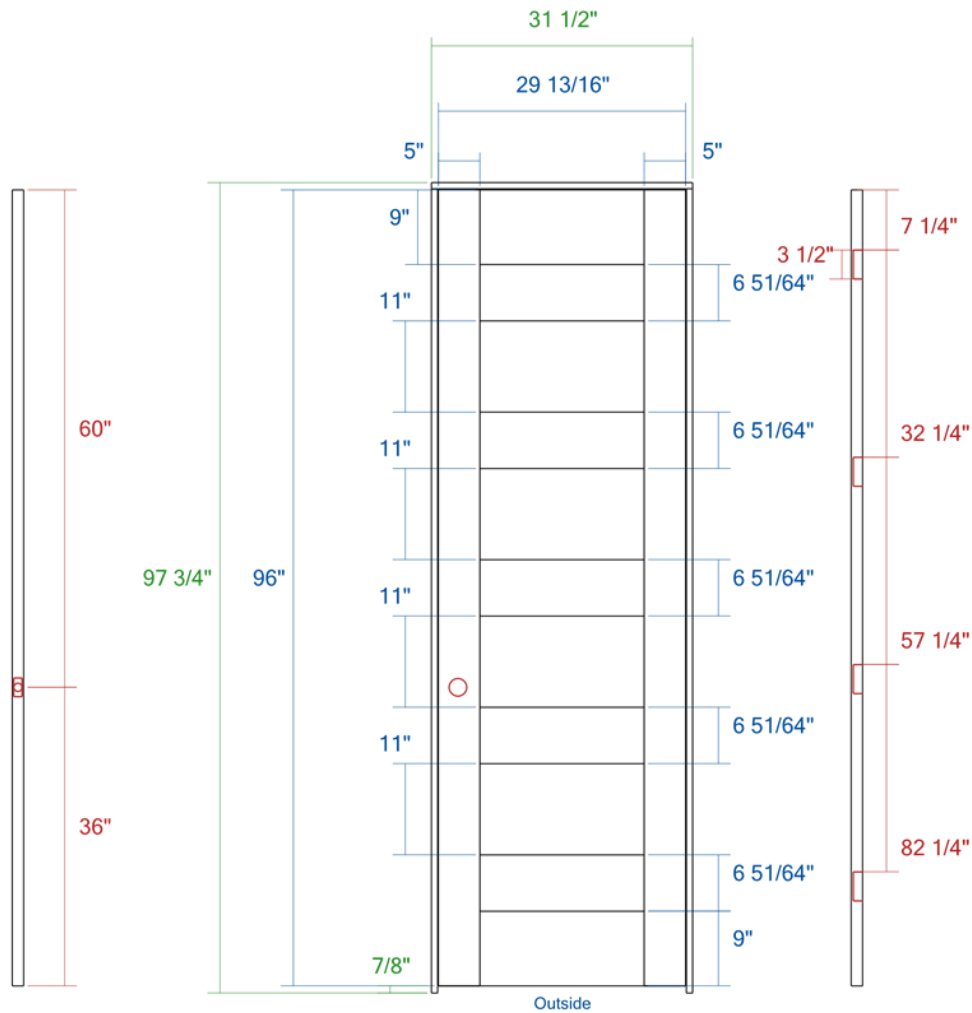


Jamb Width: 4 9/16"
Jamb Stop: Applied (OG)



Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 4 - 14 - 2680 RH		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 01/25/2022		

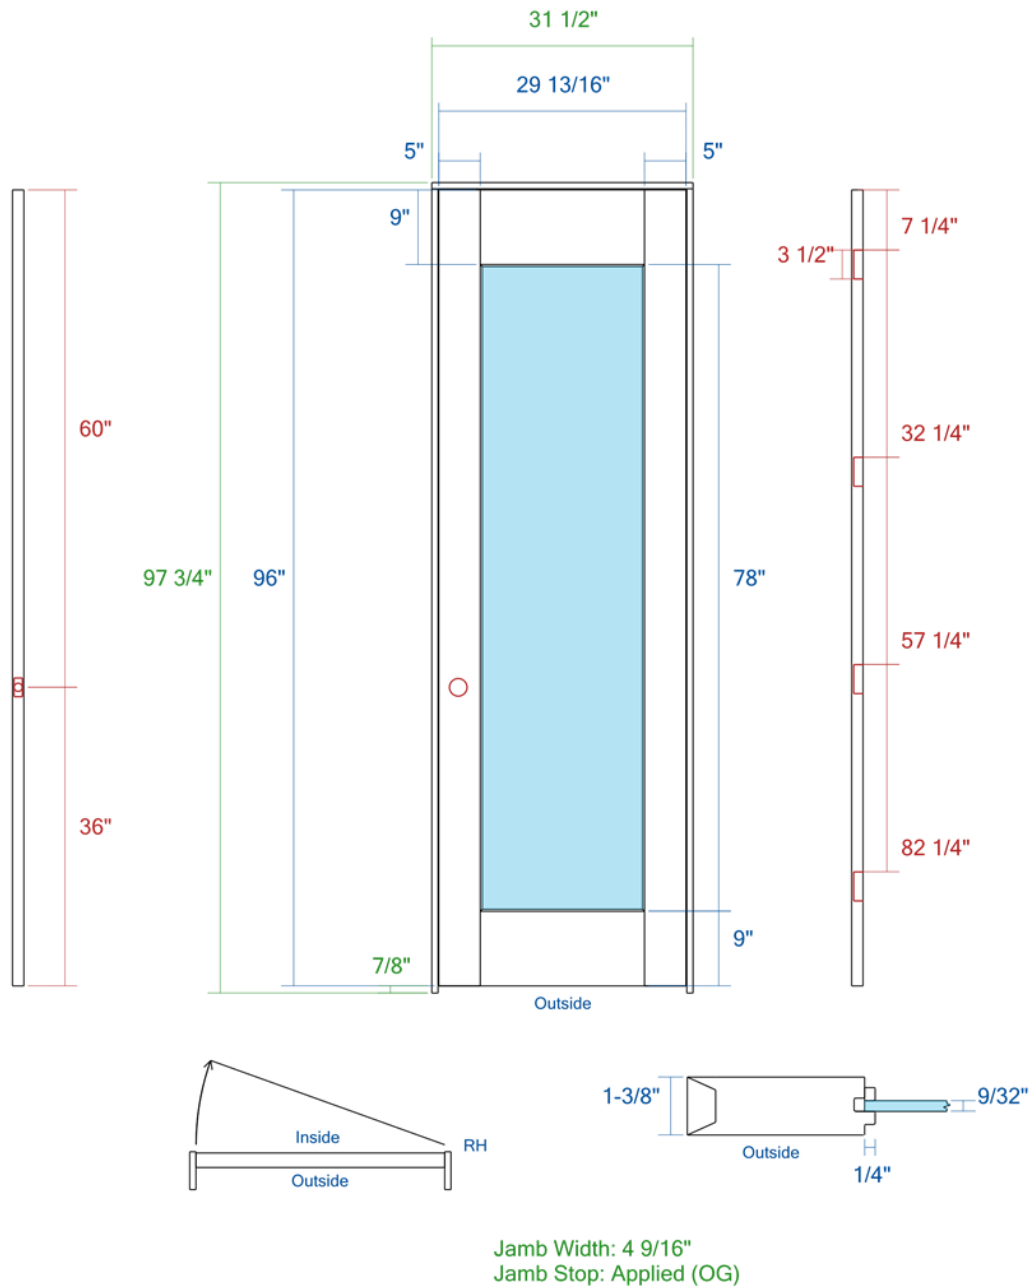

Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM1000	SS	NA	MDF	1/4" White Lami	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 5 - 14 - PANTRY		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 01/25/2022		

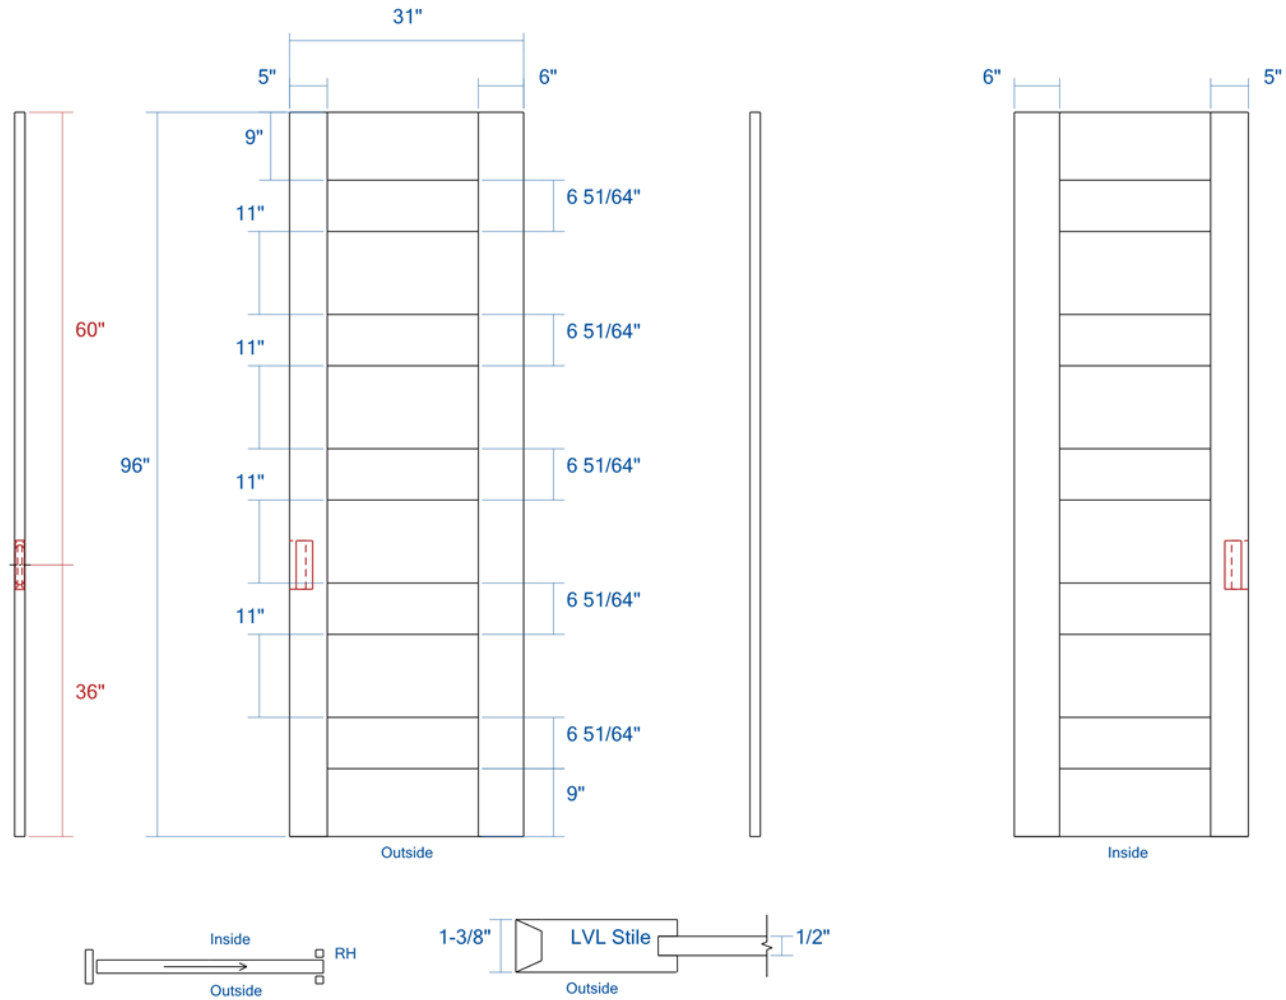


Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
MODIFIED TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 6 - 15 - 2680 POCKET		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 01/25/2022		

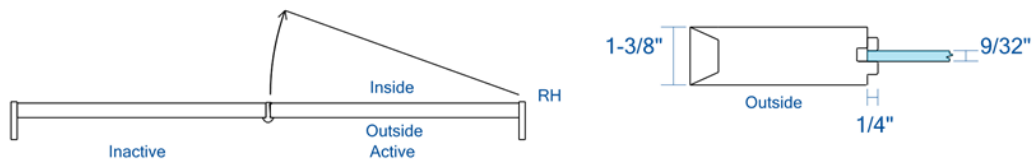
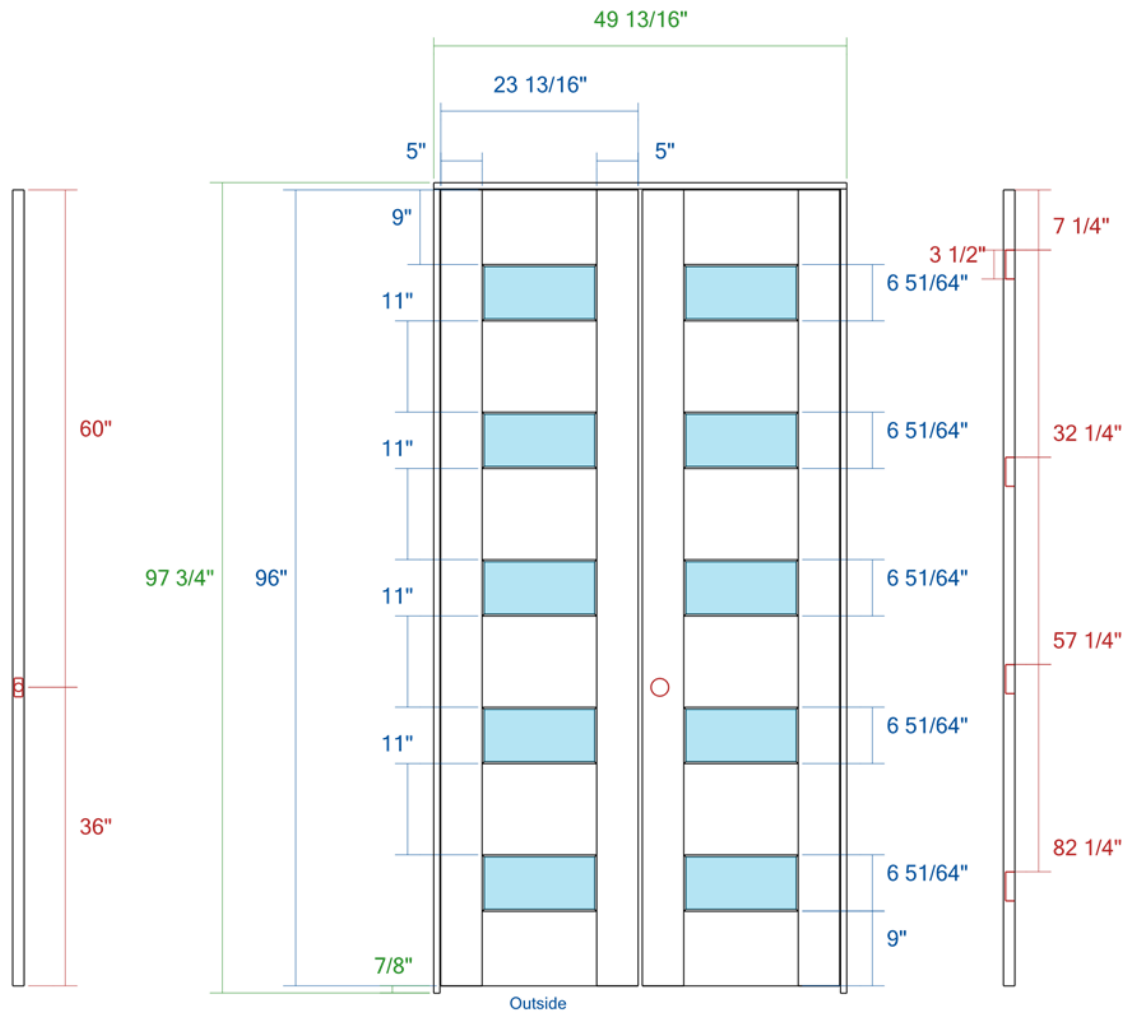


Jamb Width: 4 9/16"
Jamb Stop: Applied (OG)


Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	NA	MDF	1/4" White Lami	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 7 - 16 - 4080 PRIV LAMI		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 01/25/2022		

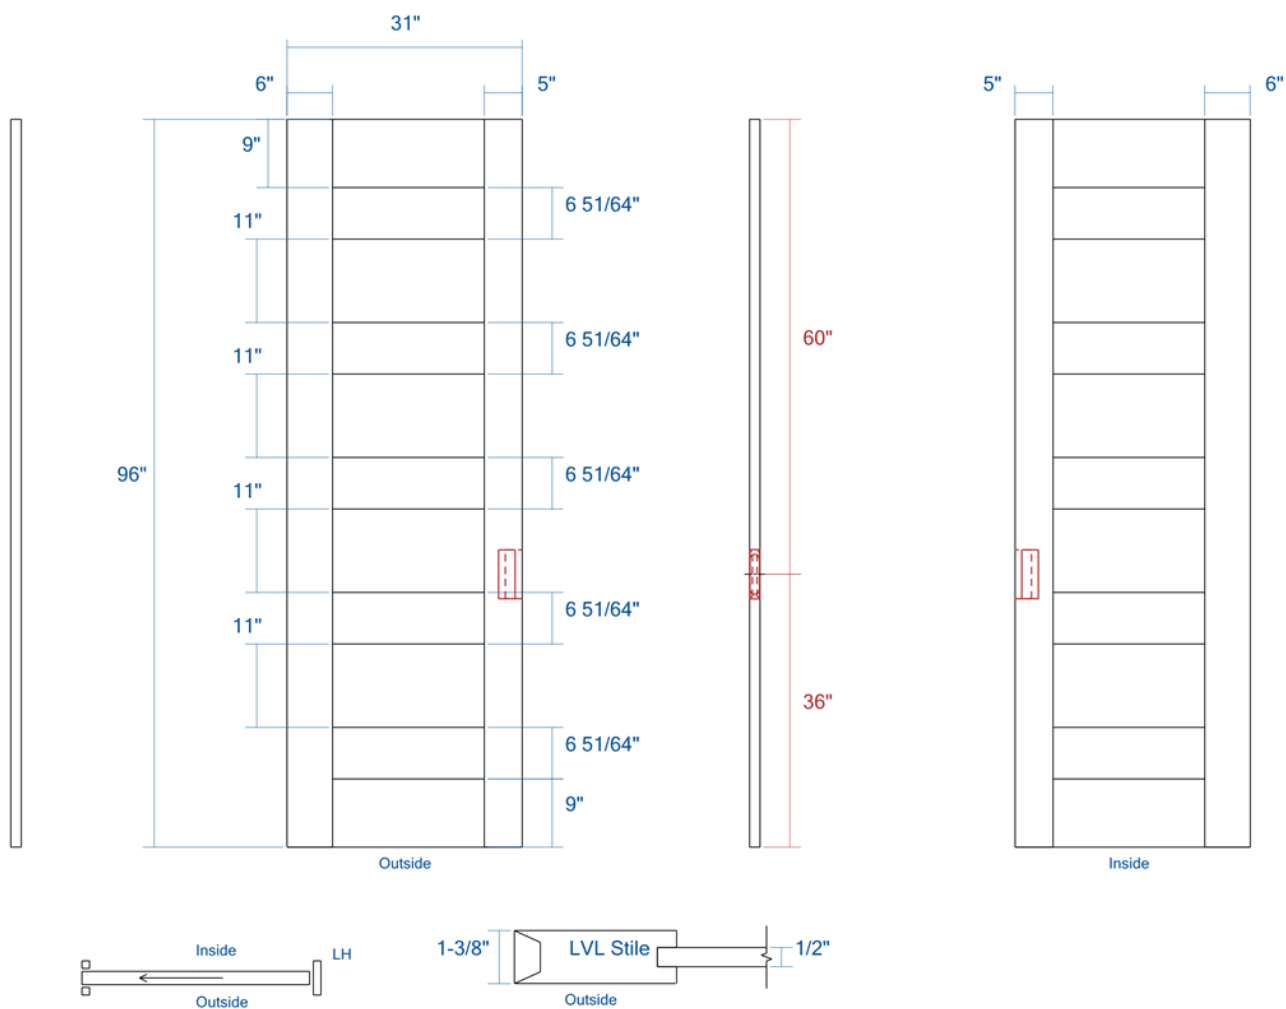

Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
MODIFIED TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 8 - 17 - 2680 DBL POCKET		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 01/25/2022		

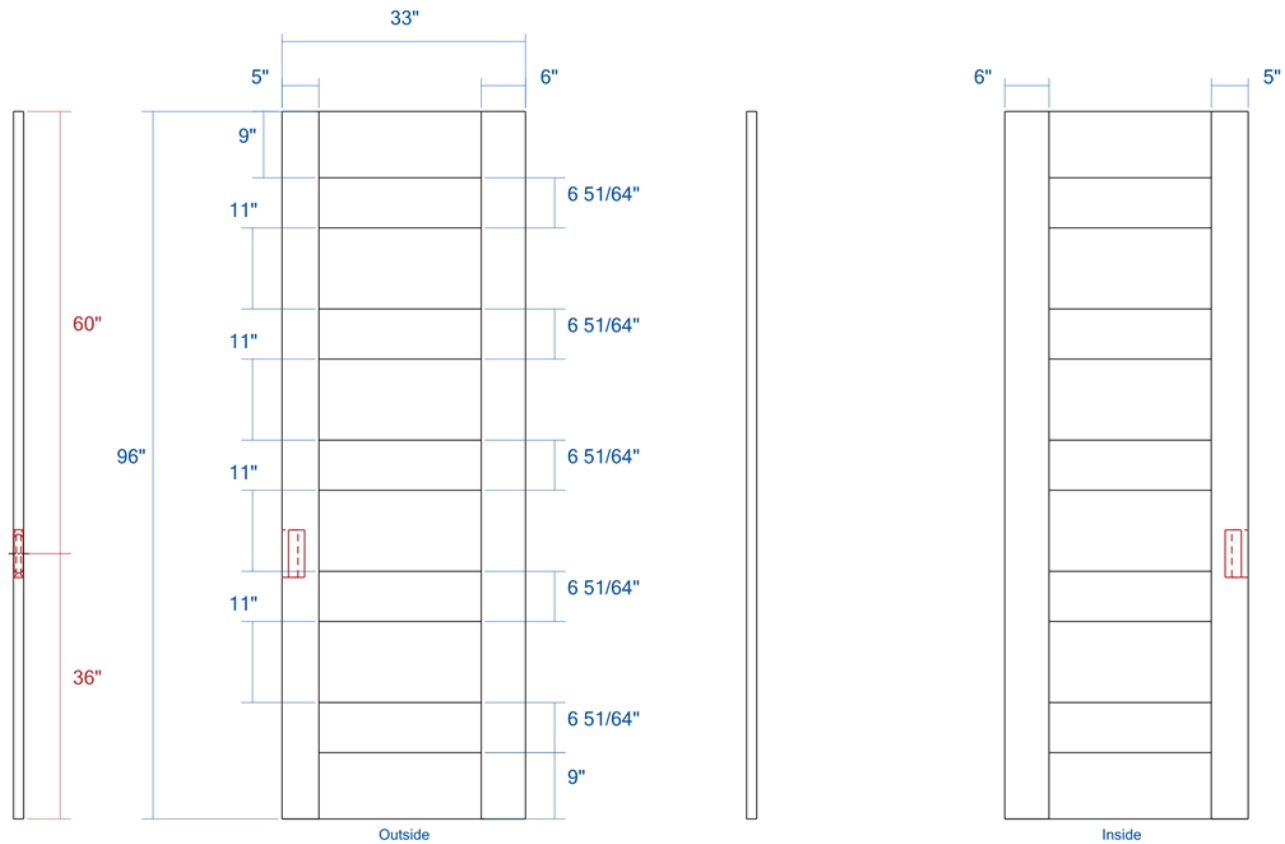



Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
MODIFIED TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 9 - 18 - 2880 POCKET		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 01/25/2022		

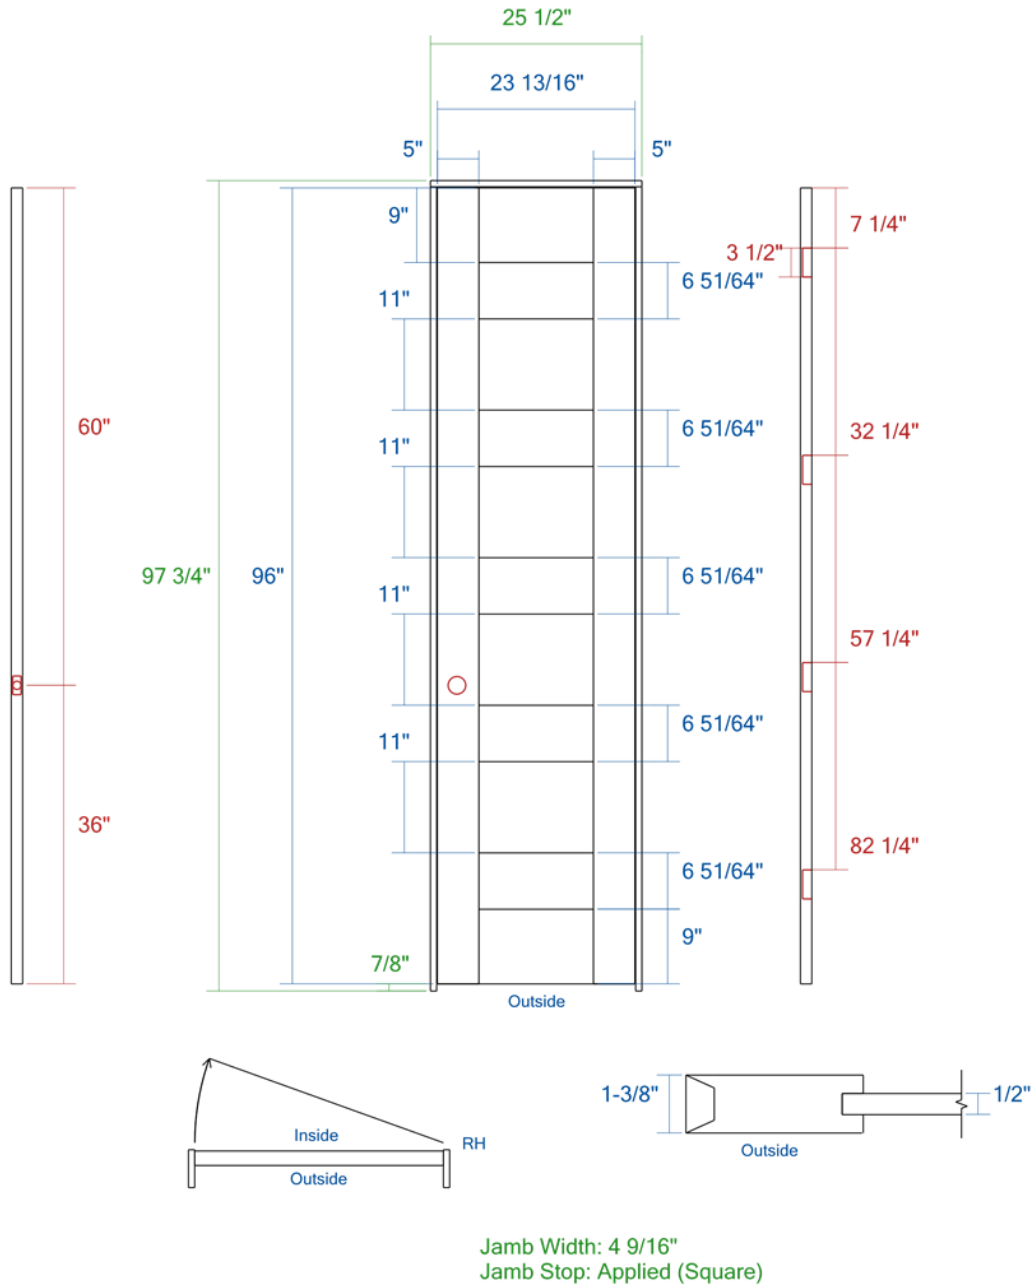

Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 10 - 19 - 2080 RH		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 01/25/2022		




Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	NA	MDF	1/4" White Lami	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 11 - 20- 2880 RH LAMI		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 01/25/2022		

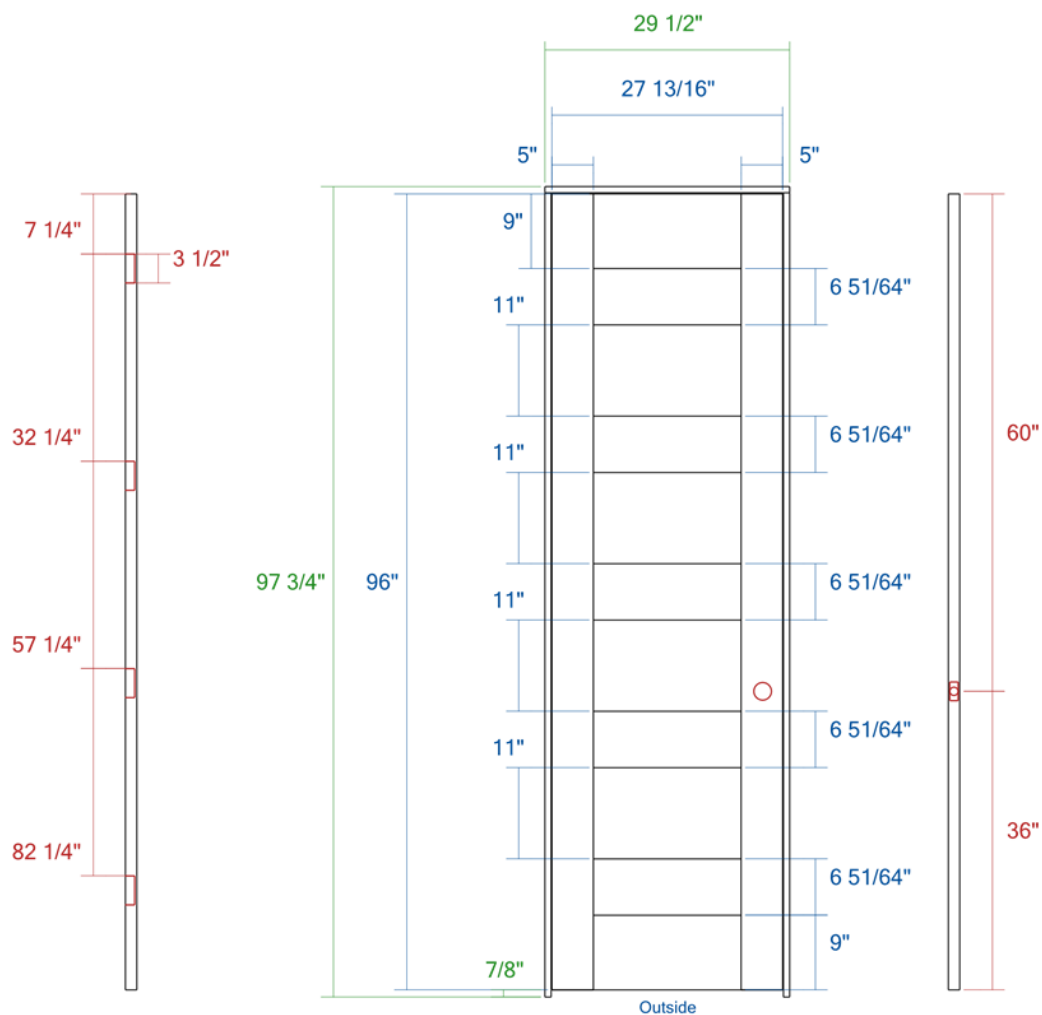


Jamb Width: 4 9/16"
Jamb Stop: Applied (OG)



Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 12 - 21 - 2480 LH		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 01/25/2022		

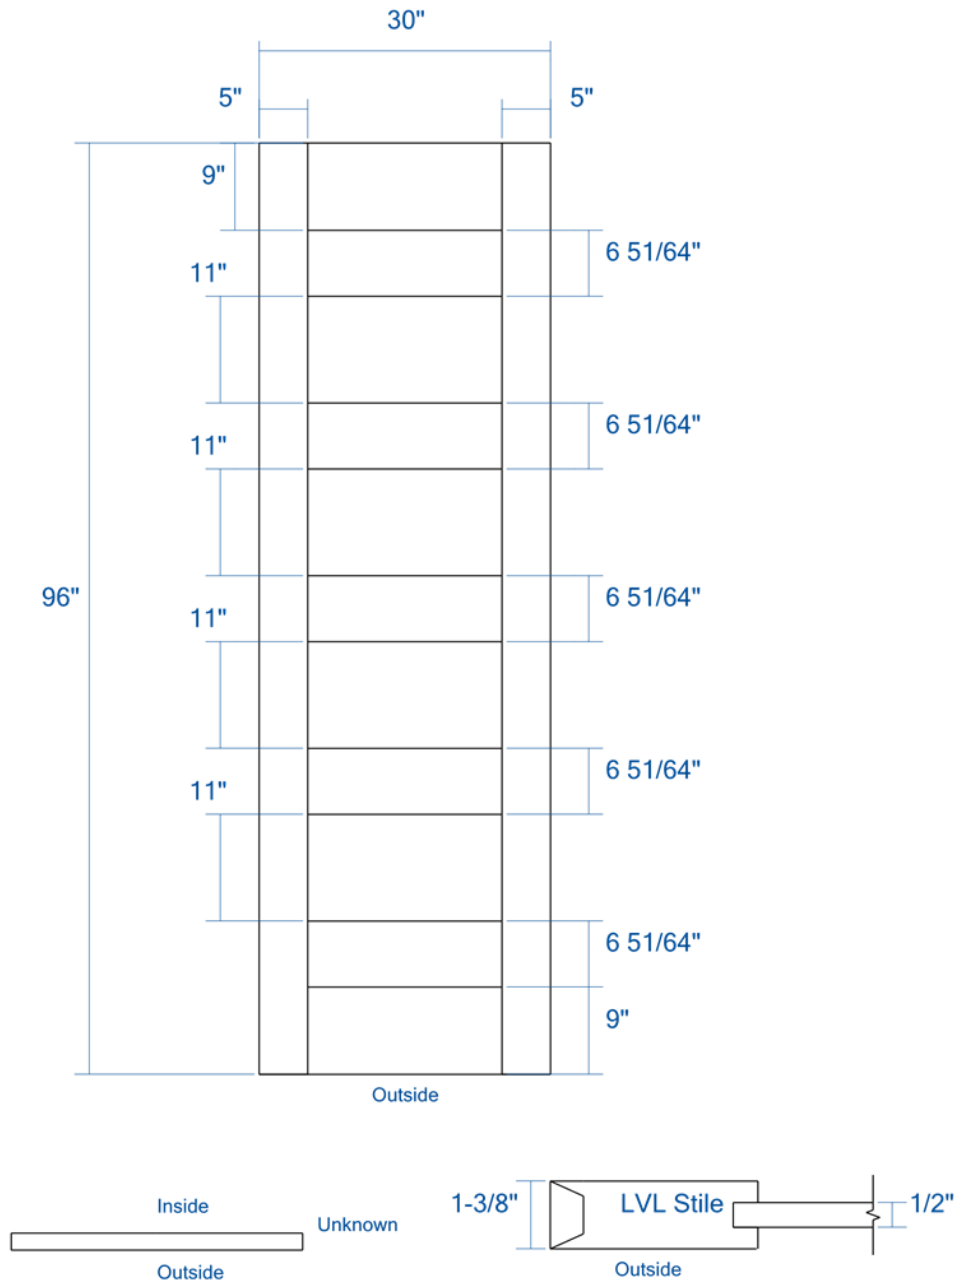

Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 13 - 22A - 2680 BYPASS		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 01/25/2022		

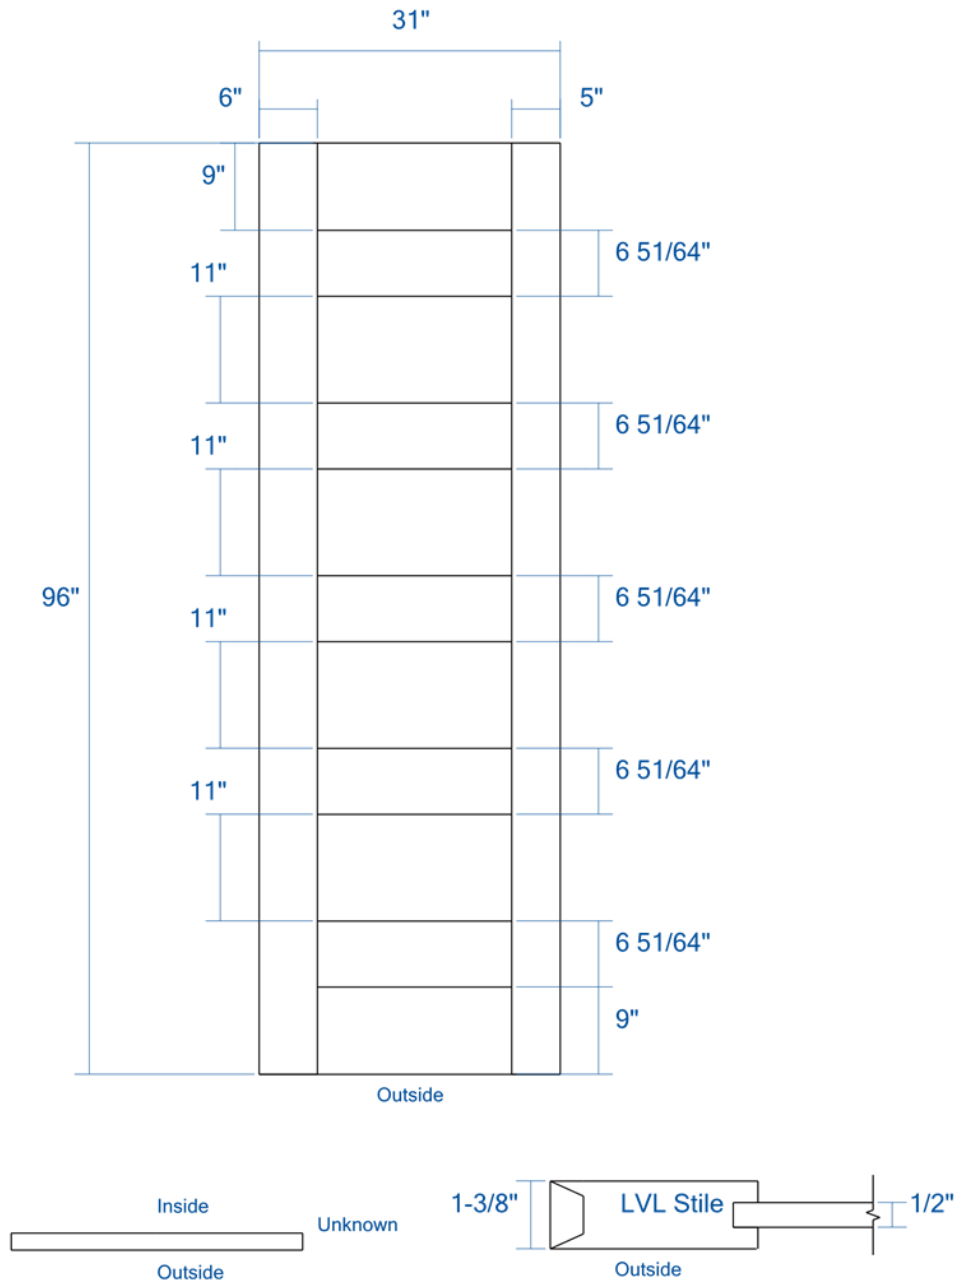


Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
MODIFIED TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 14 - 22B - 2680 BYPASS		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 01/25/2022		

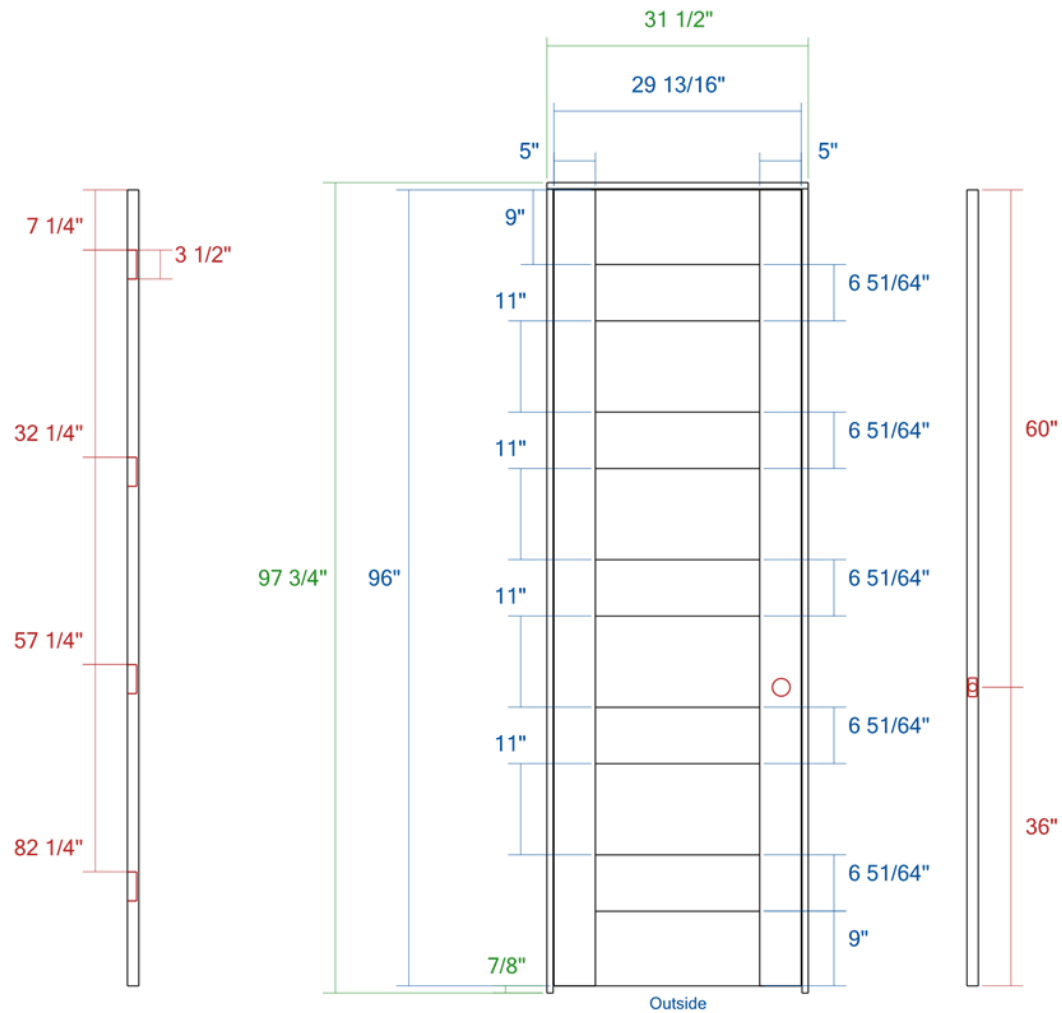


Jamb Width: 4 9/16"
Jamb Stop: Applied (OG)


Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 15 - 23 - 2680 LH		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 01/25/2022		

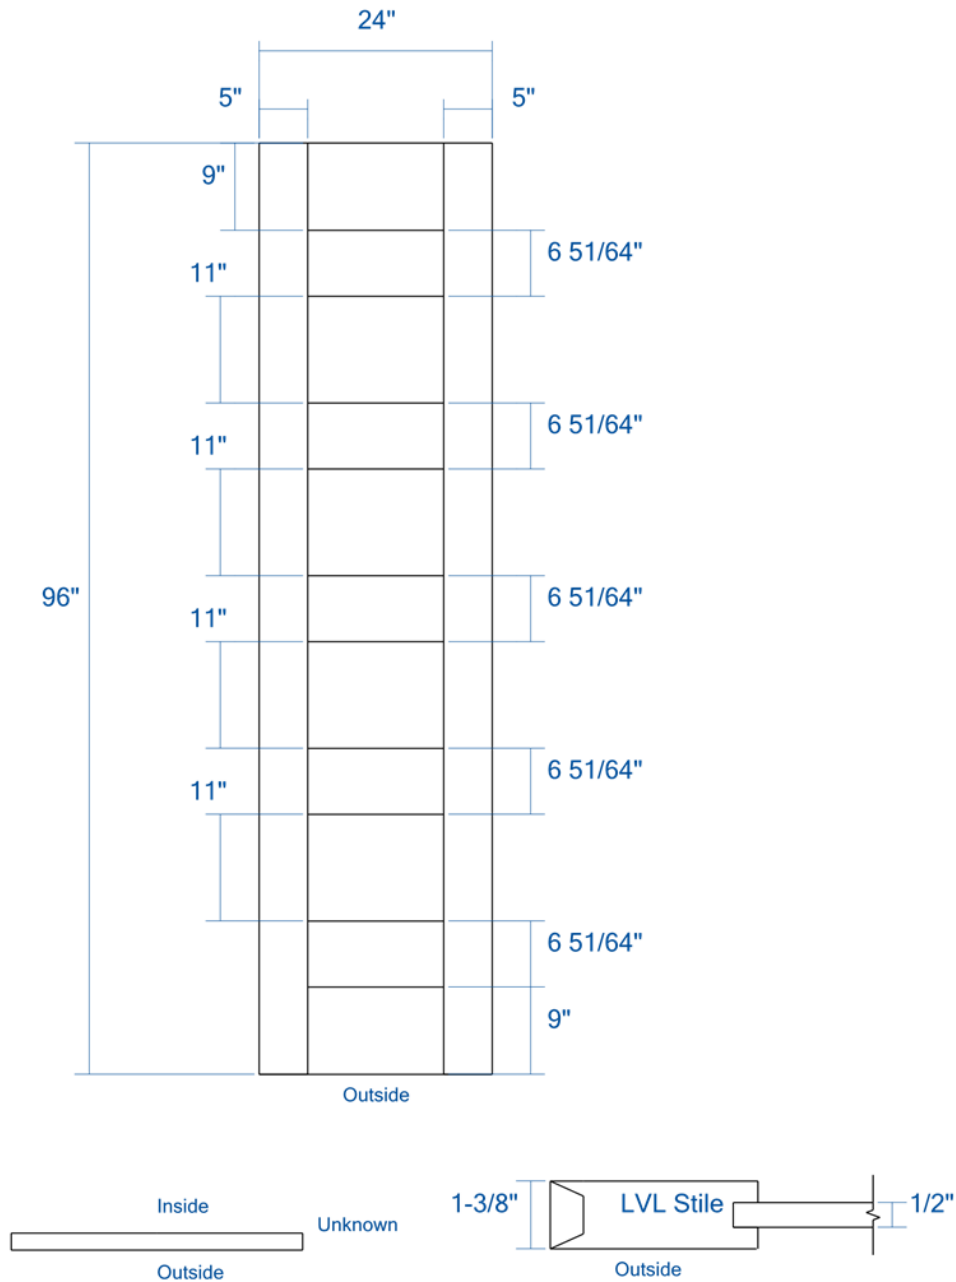




Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 16 - 24A - 2080 BYPASS		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 01/25/2022		

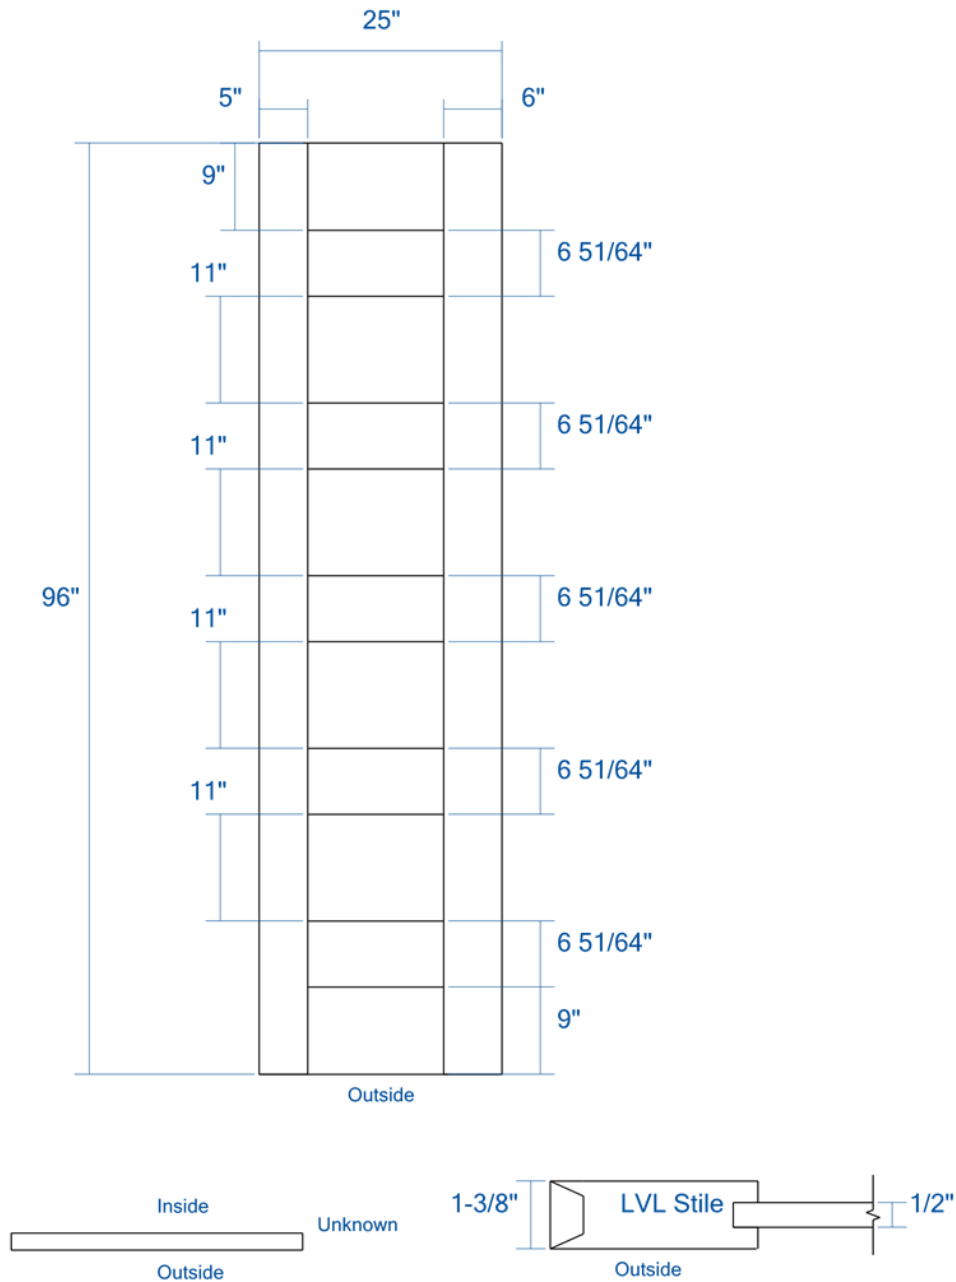

Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
MODIFIED TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 17 - 24B - 2080 BYPASS		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 01/25/2022		




Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 18 - 25 - 2880 LH		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 01/25/2022		


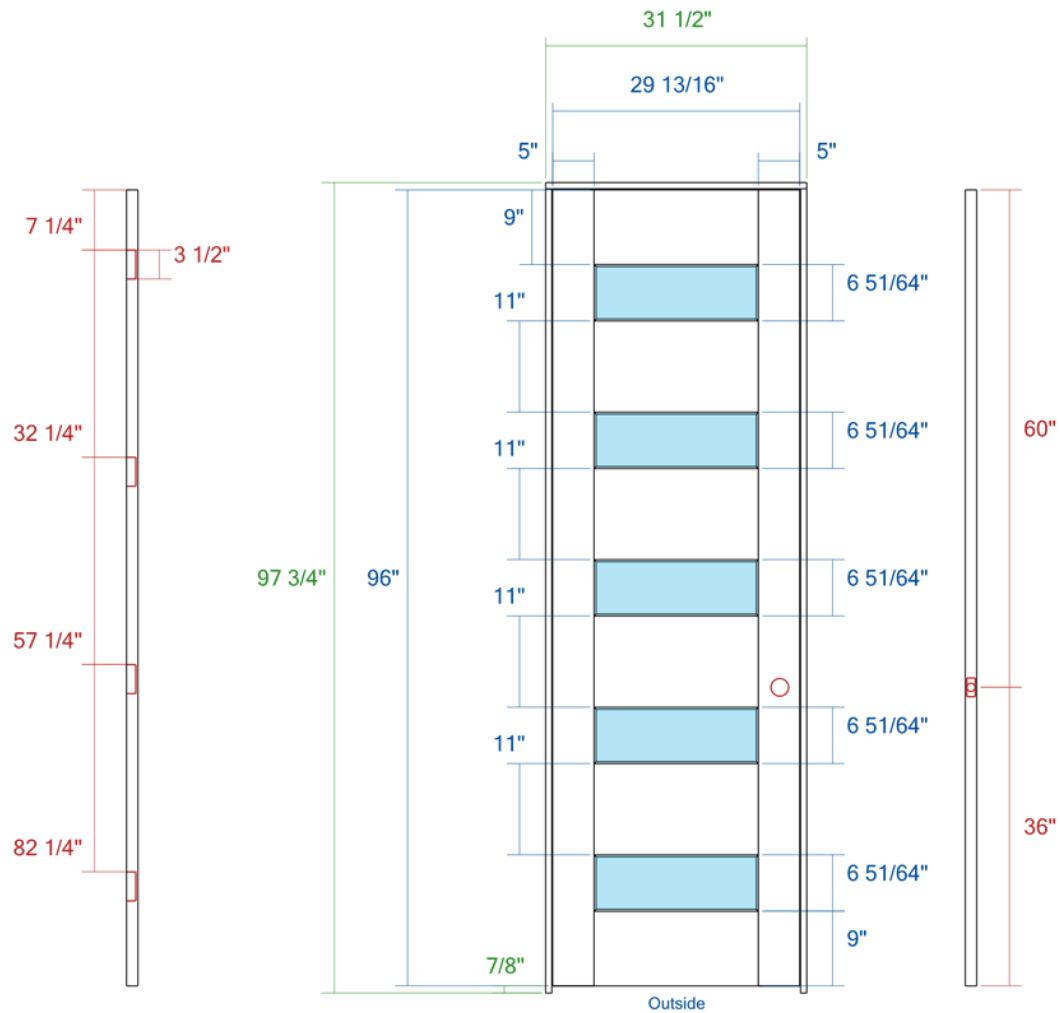


Jamb Width: 4 9/16"
Jamb Stop: Applied (Square)

Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	NA	MDF	1/4" White Lami	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 19 - 28- 2680 LH LAMI		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 01/25/2022		

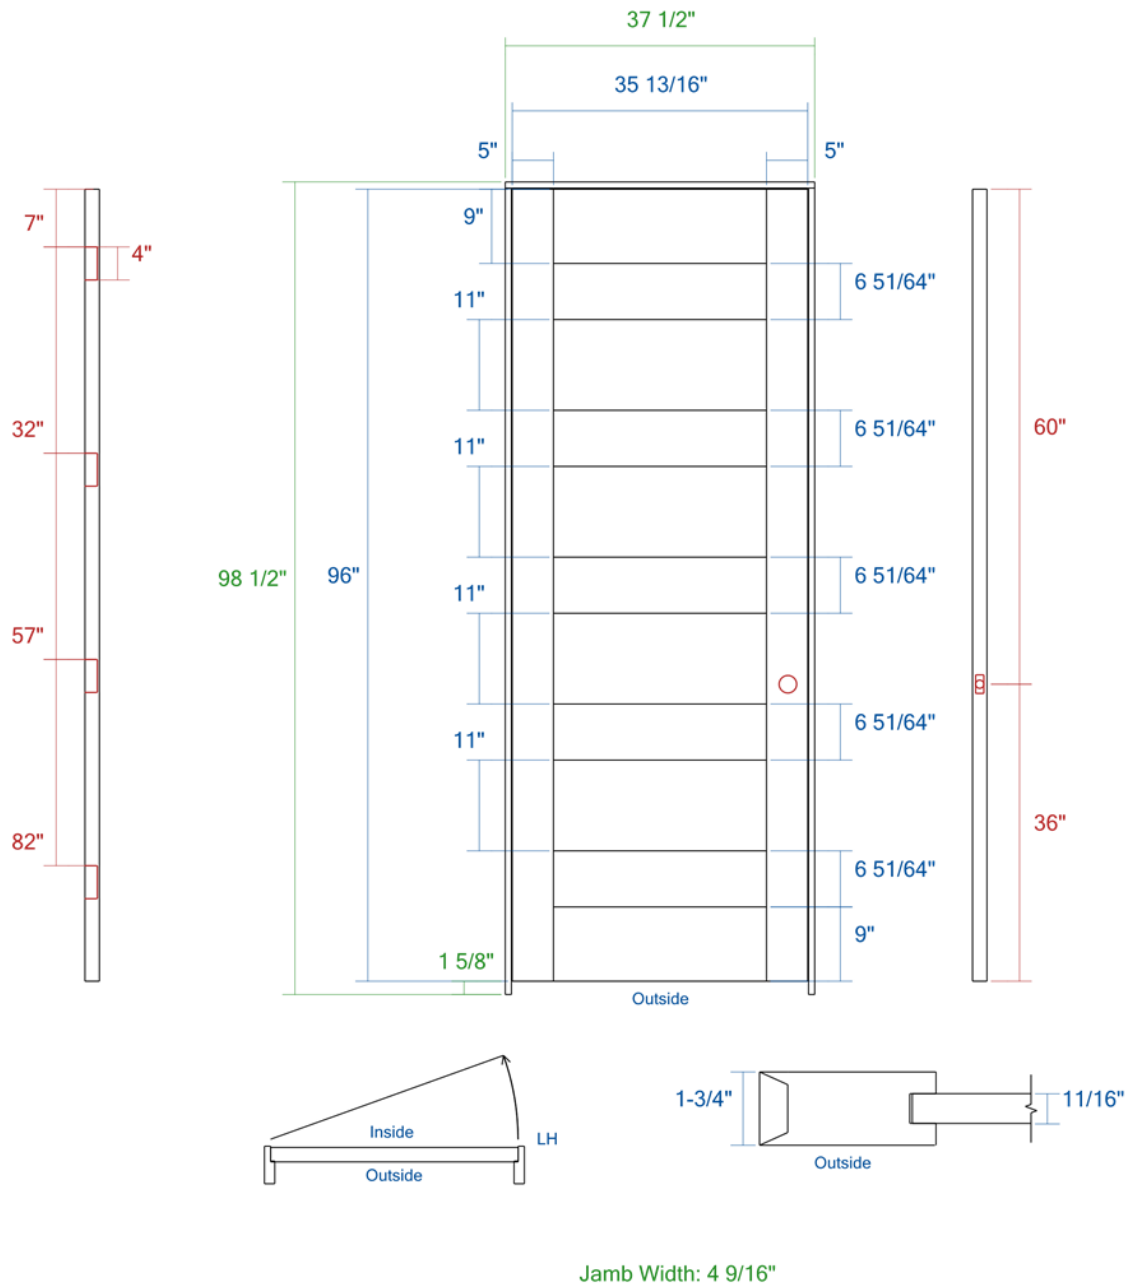

Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	20 Minute Neutral Pressure	Interior
Quote #: SQDRQ000332-1				Line #: 20 - 29 - GARAGE 1		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 01/25/2022		

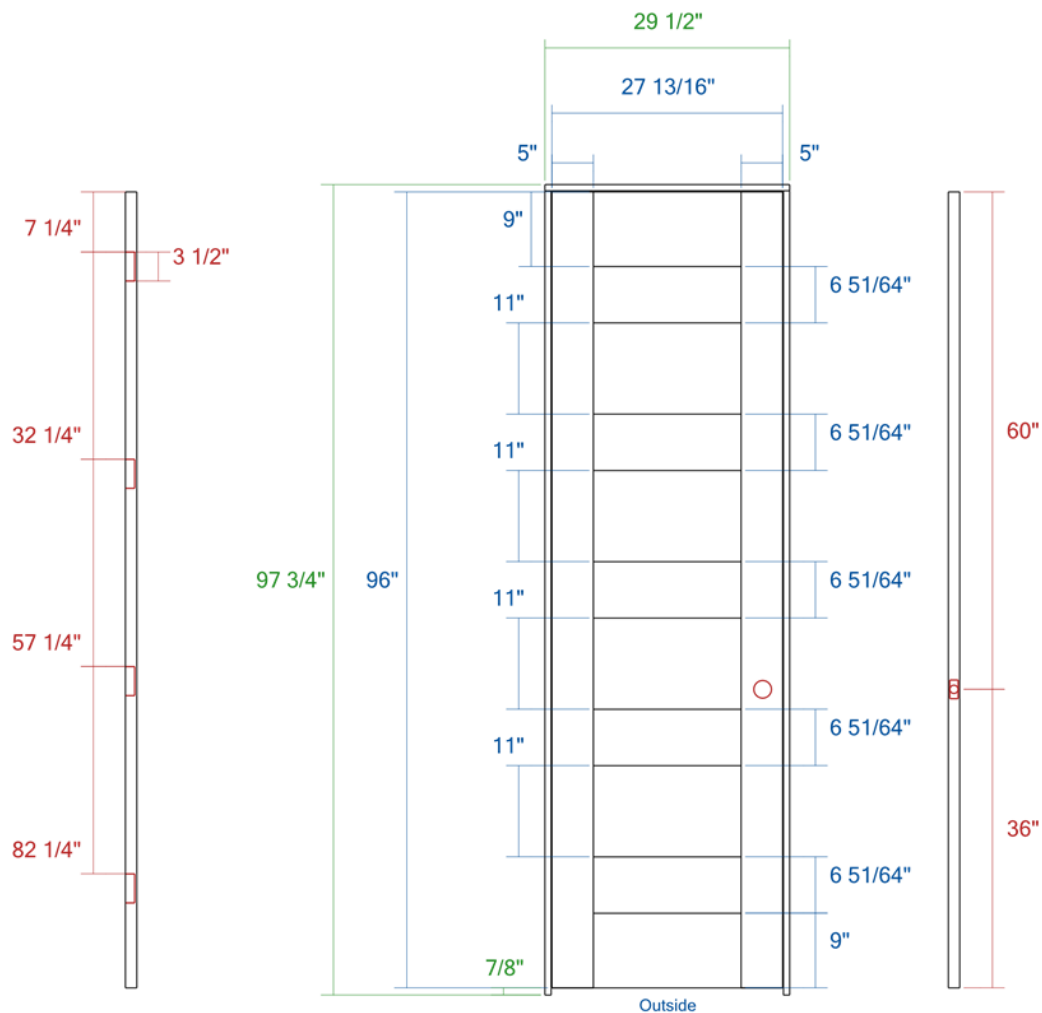

Jamb Width: 4 9/16"
Jamb Stop: Applied (OG)

Door Style	Sticking	Panel	Material	Glass	Fire Rating	Grade
TM5100	SS	C	MDF	N/A	Non-Rated	Interior
Quote #: SQDRQ000332-1				Line #: 21 - 30 - 2480 LH 6		
Ervin Architectural Products				Entered By: David Canton		
Approval (sign here):				Created On: 01/25/2022		